



NOTE: Wire dimming conductors as Class 1


1 SINGLE FIXTURE

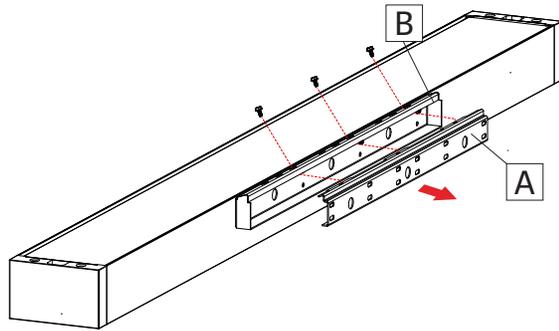

Unscrew and remove wall bracket (A) from fixture bracket (B).

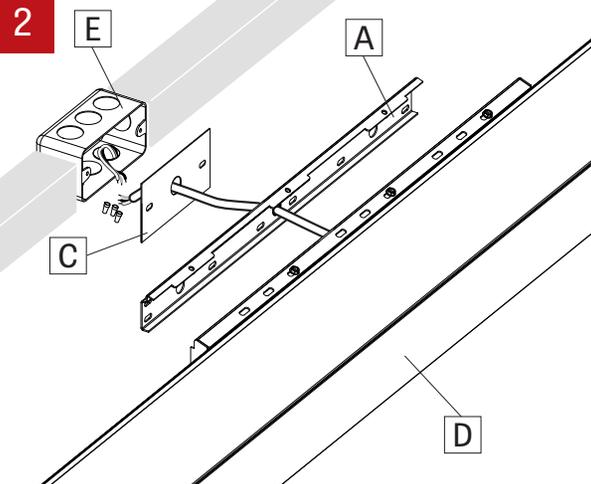


Pass the electrical wires through the wall bracket (A) and junction cover (C) and make electrical connection between fixture (D) and junction box (E).

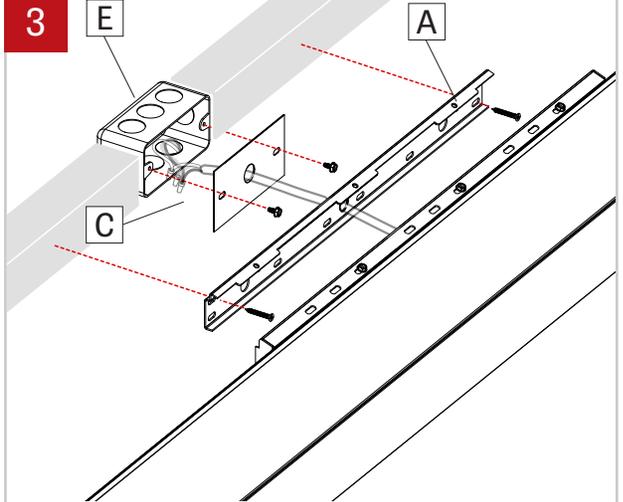


Screw back the junction cover (C) on the junction box (E) and then screw the wall bracket (A) to the wall using anchors.

4

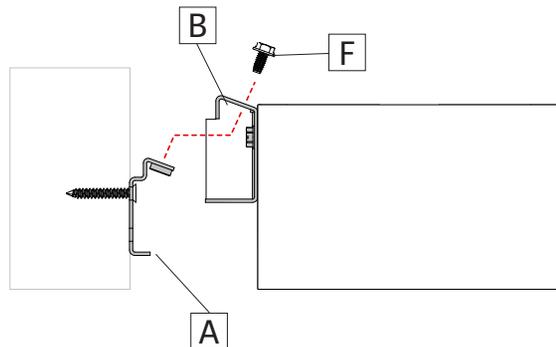


Insert fixture bracket (B) into wall bracket (A) and secure in place with supplied screws (F). Do not overtighten.

5 CONTINUOUS SYSTEM

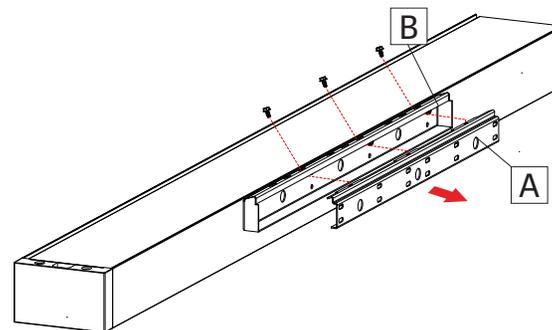


Unscrew and remove wall bracket (A) from fixture bracket (B). Put it in a safe place.


6

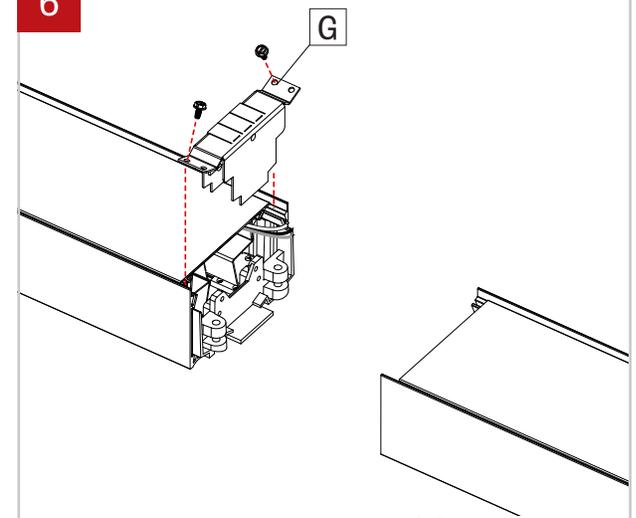


Unscrew and remove the top cap (G). Place it in a safe place.

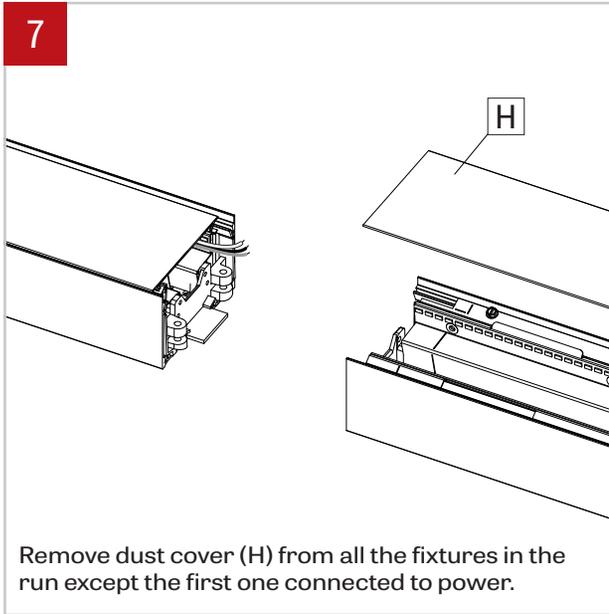


Remove dust cover (H) from all the fixtures in the run except the first one connected to power.

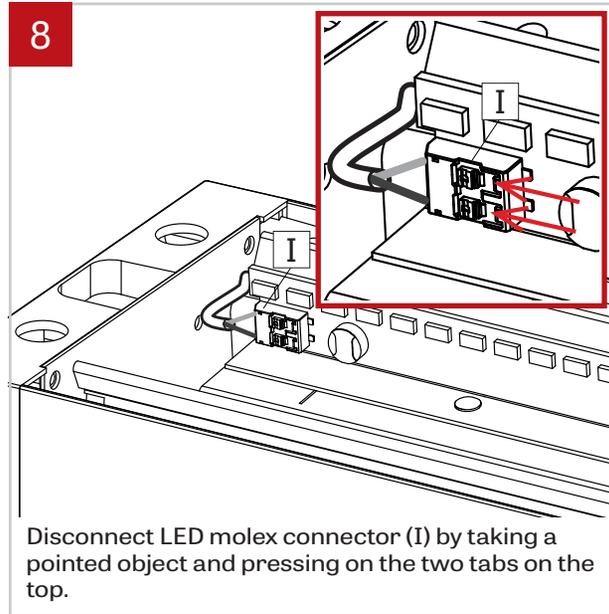


Disconnect LED molex connector (I) by taking a pointed object and pressing on the two tabs on the top.

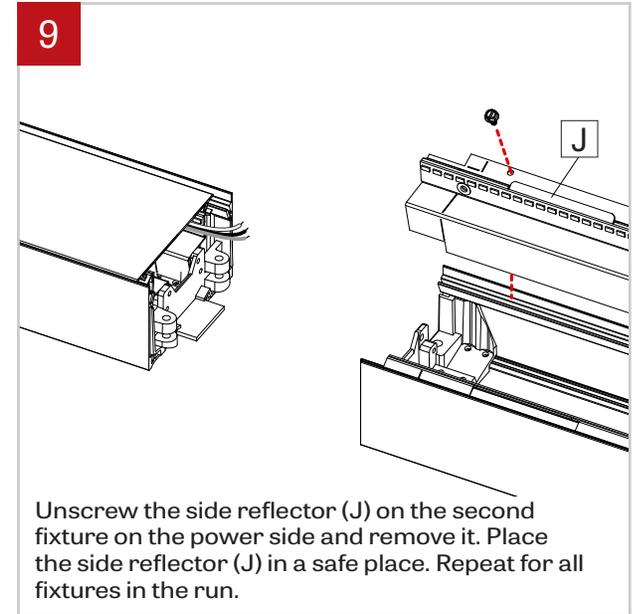


Unscrew the side reflector (J) on the second fixture on the power side and remove it. Place the side reflector (J) in a safe place. Repeat for all fixtures in the run.

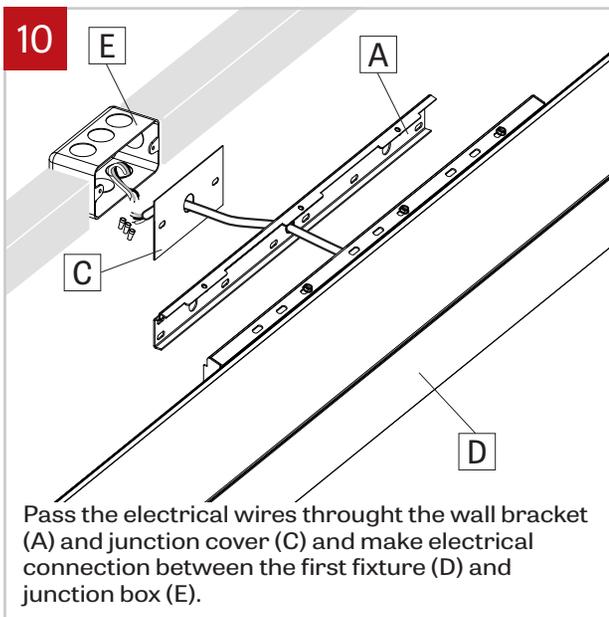







Pass the electrical wires through the wall bracket (A) and junction cover (C) and make electrical connection between the first fixture (D) and junction box (E).

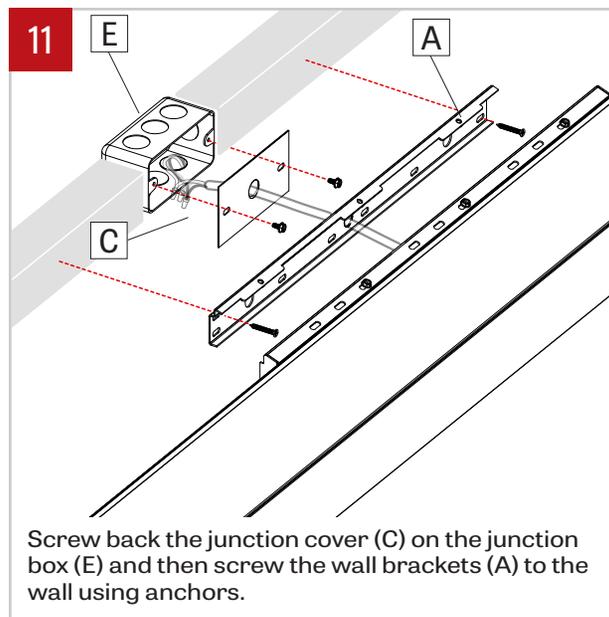

Screw back the junction cover (C) on the junction box (E) and then screw the wall brackets (A) to the wall using anchors.

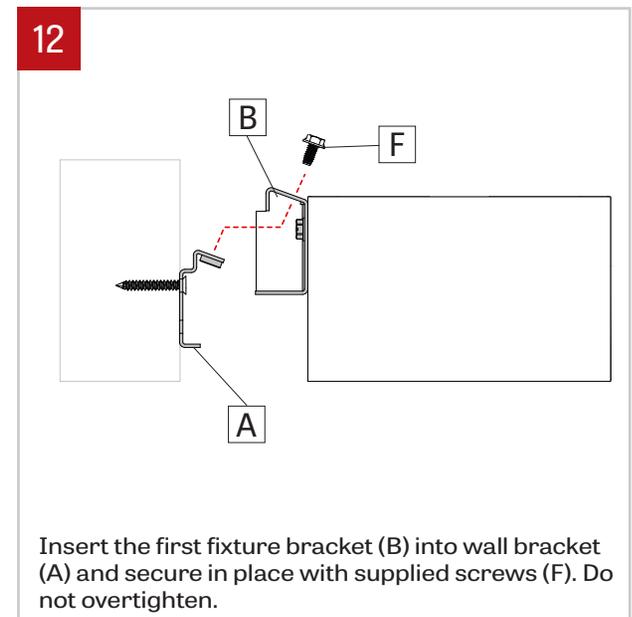

Insert the first fixture bracket (B) into wall bracket (A) and secure in place with supplied screws (F). Do not overtighten.

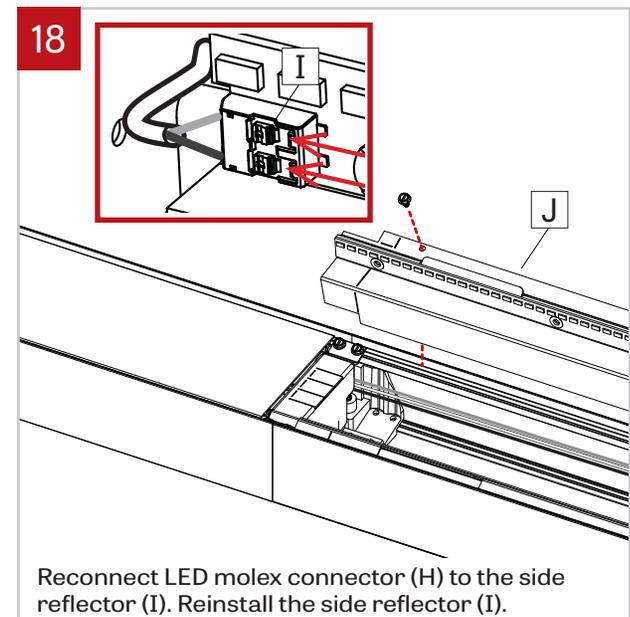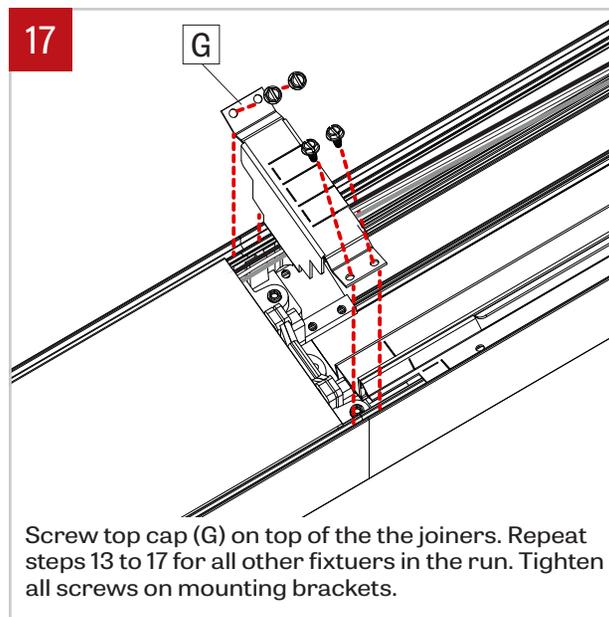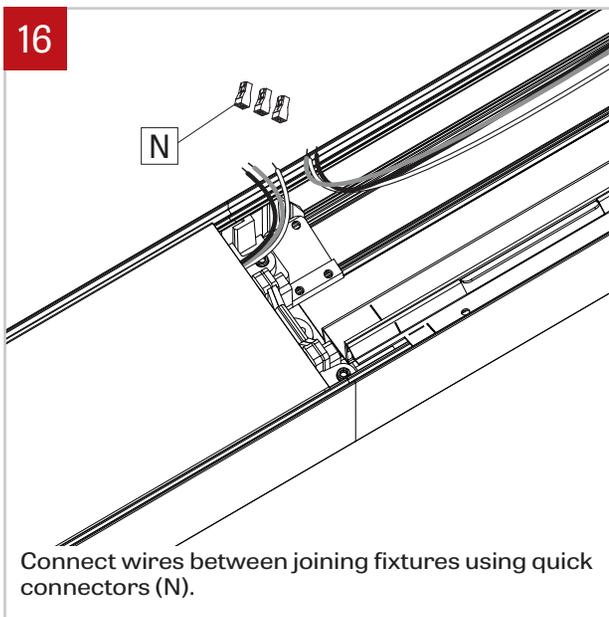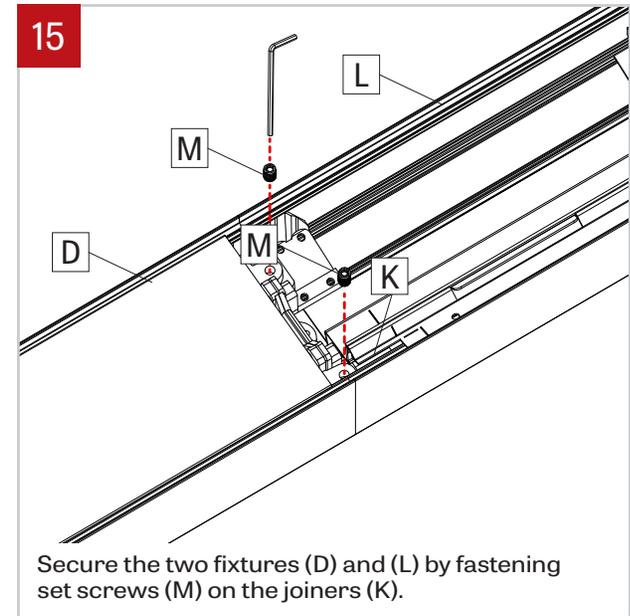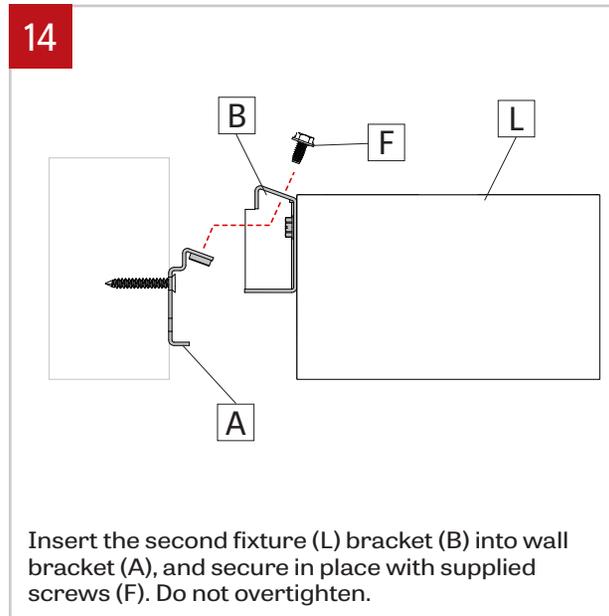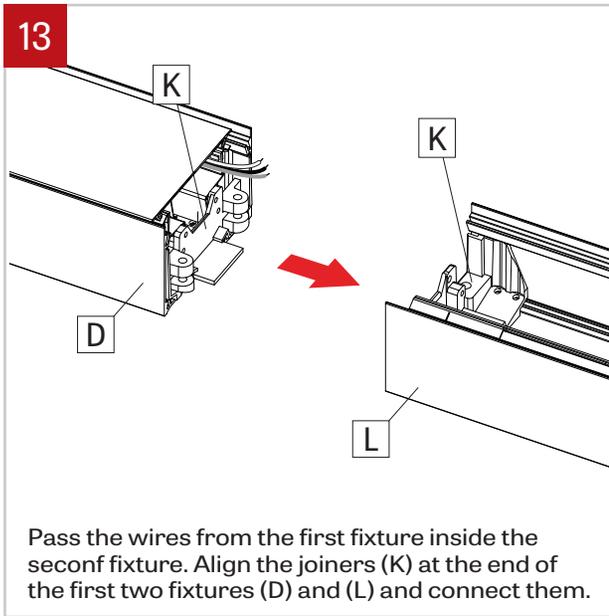

19

