


**IMPORTANT:** Installation instructions are shown with 4ft Fortex 1 and applies to all Fortex 1 sizes

**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

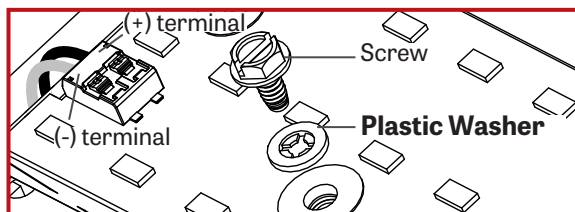


1

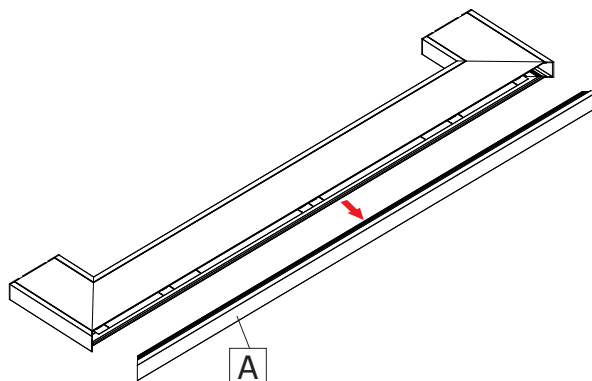


Make sure the power to the fixture is turned off. Remove the lens (A) from the fixture.

2

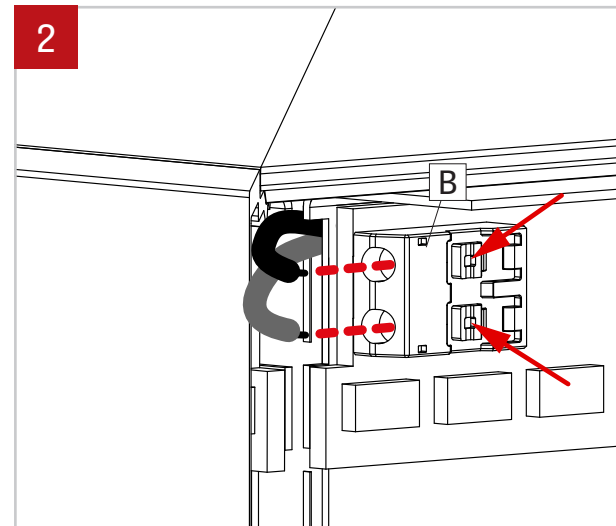


Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

3

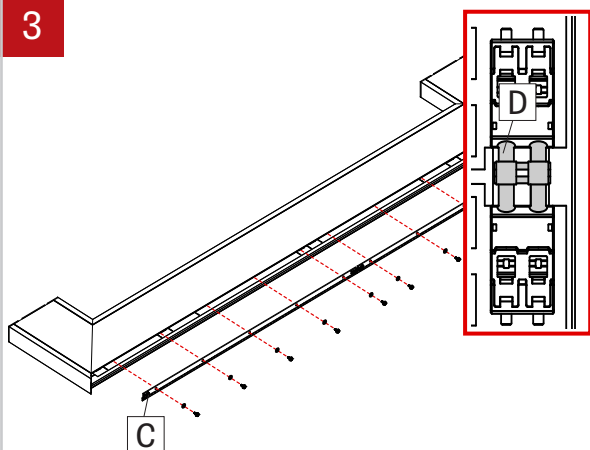


Unscrew the LED boards (C) directly from the fixture and remove them. If need to remove just one board, disconnect the coupler (D) between the two boards connectors after having unscrew the LED board (C).

4

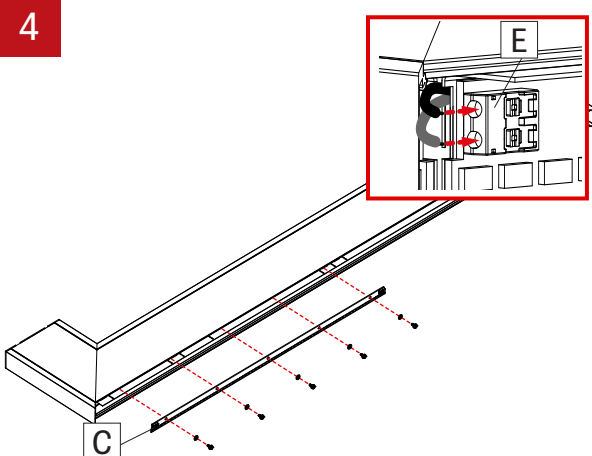

Replace LED boards (C) and screw back in place the first one by using screws with washers. Do not apply too much pressure. Reconnect LED molex connector (B) to the first board.


5

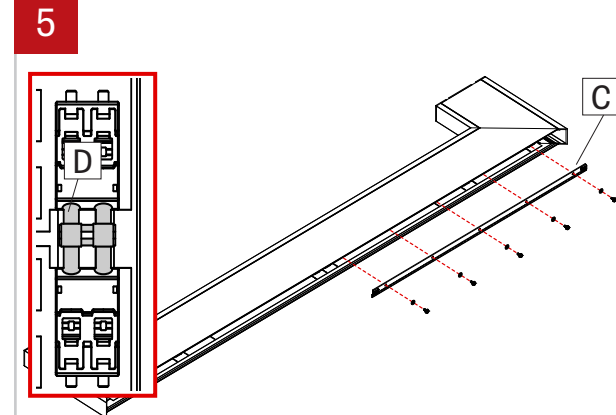

Insert coupler (D) into connector of the first board. Insert coupler (D) into connector of the second board. Screw second LED board (C) to the fixture by using **screws with plastic washers**. Do not apply too much pressure. Make sure that the coupler stays in place in between the two boards.

**IMPORTANT:** Installation instructions are shown with 4ft Fortex 1 and applies to all Fortex 1 sizes

6

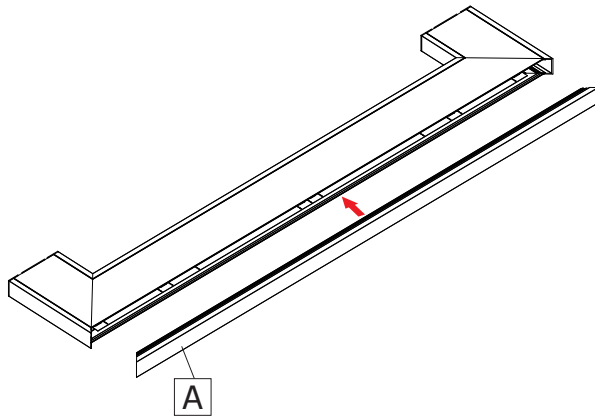

Put back in place the lens (A).