


NOTE: Wire dimming conductors as Class 1


1

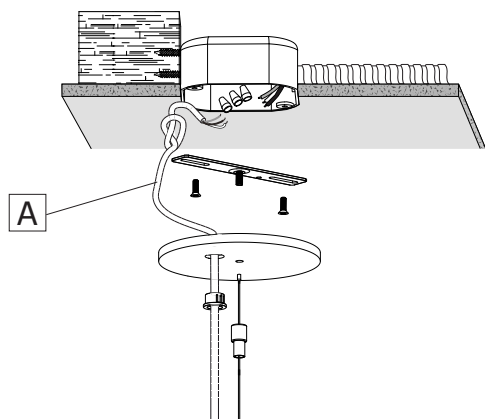

Locate ceiling mounting points according to supplied client drawing. Make a knot in the power cord (A) and then connect it to the ceiling power feed. Install cross bar to the junction box.

2


POWER SIDE

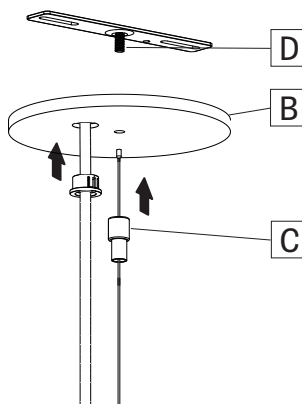

Secure canopy (B) with grip lock (C) on threaded rod (D).

3


NON-POWER SIDE

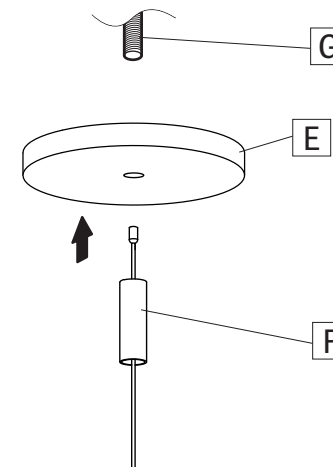

Secure canopy (E) with cable coupler (F) on threaded rod (G) (by other).


4

YOKE CABLE

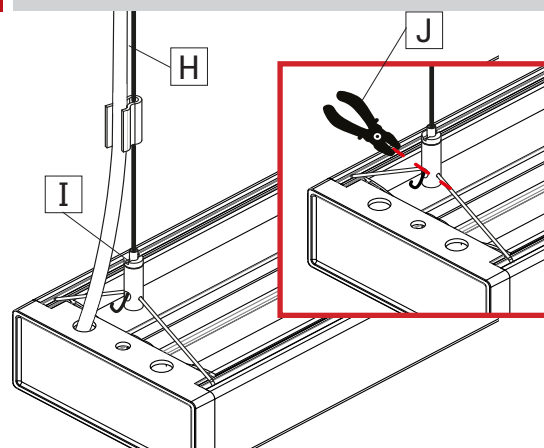

Insert the aircraft cable (H) into the griplock. Adjust the cable (H) length by pushing the feeder tube (I) and **cut the excess cable** with a cable cutter (J).


5

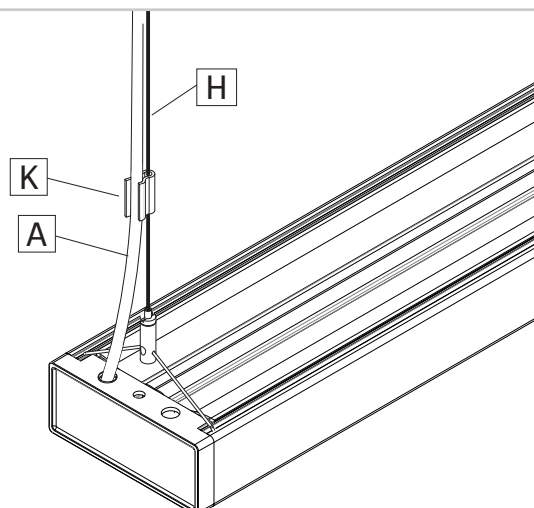

Secure the power cord (A) to the aircraft cable (H) with the plastic clip (K).


6

STANDARD AIRCRAFT

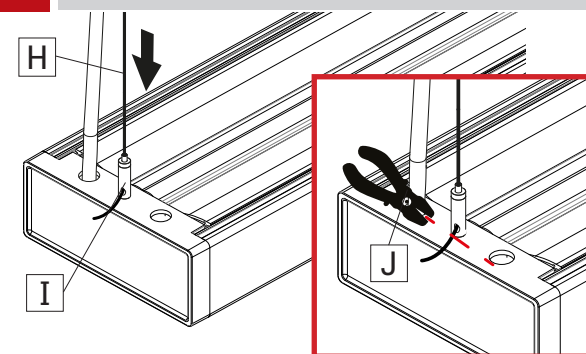


Insert the aircraft cable (H) into the griplock. Adjust the cable (H) length by pushing the feeder tube (I) and **cut the excess cable** with a cable cutter (J).

7 STANDARD AIRCRAFT

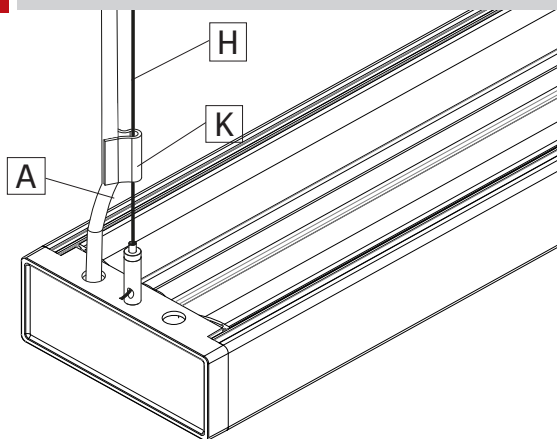


Secure the power cord (A) to the aircraft cable (H) with the plastic clip (K).

8 CONTINUOUS SYSTEM

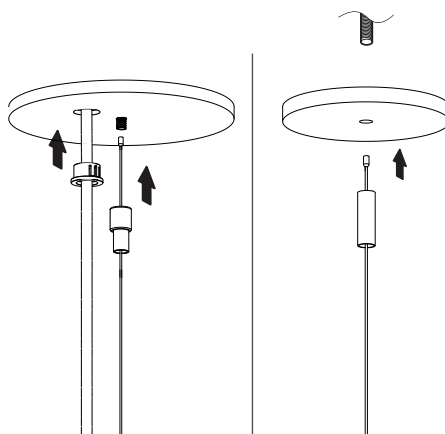


For a continuous system, repeat steps 1 to 3 for all mounting.

9

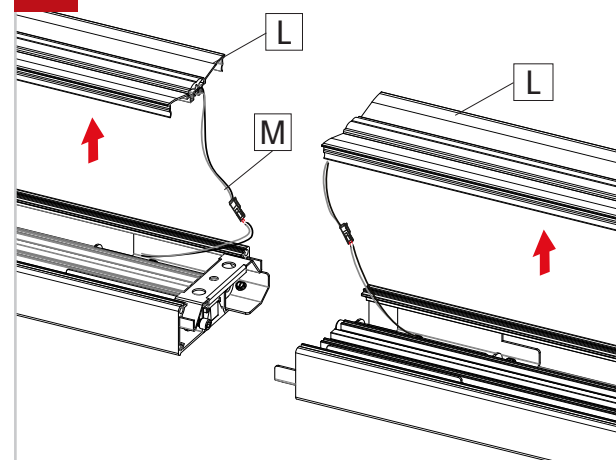


Remove the top cartridges (L) by pulling them up and disconnect the quick connectors (M). Keep the cartridges (L) in a safe place.

10 YOKE CABLE / STANDARD AIRCRAFT

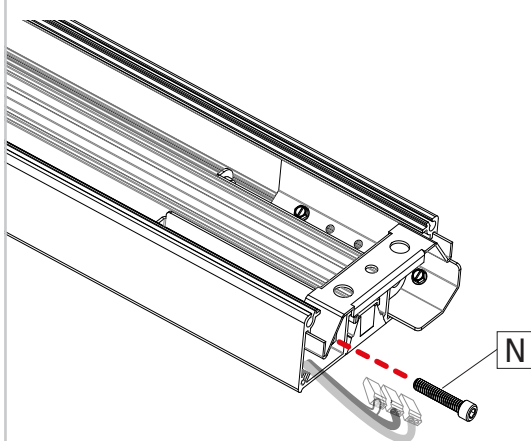


Remove the screw (N) from the first fixture and put it in a safe place.

11 YOKE CABLE / STANDARD AIRCRAFT

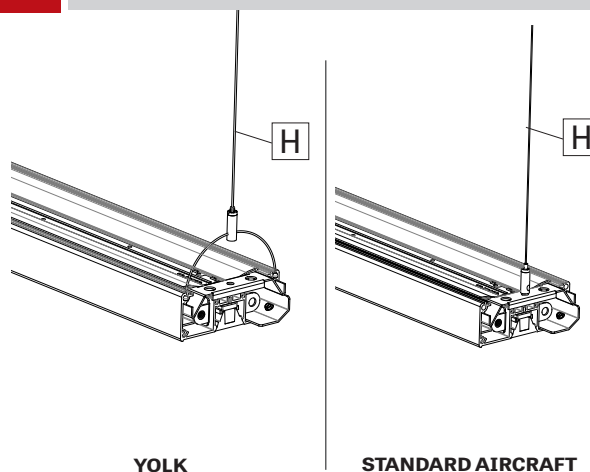


Refer to the single fixture for insertion of the aircraft cable (H). (as shown in step 4 to 7)


12

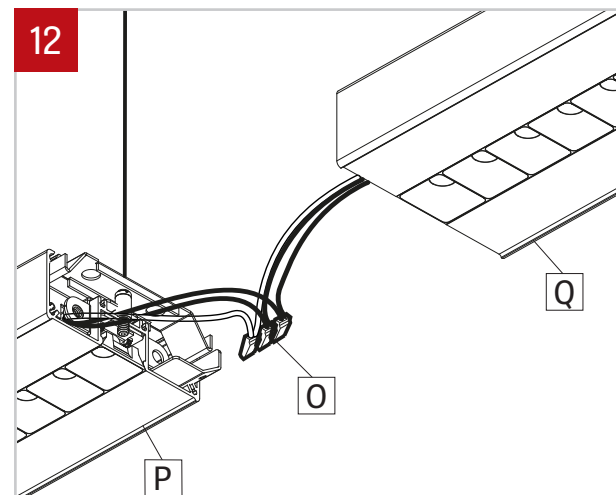

Connect wires between joining fixtures (P) and (Q) using wires connectors (O). Push the connectors inside the second fixture (Q). **Number of wires may vary.**

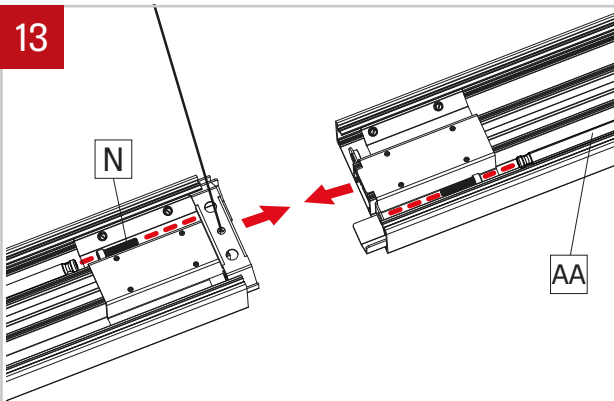

Join fixtures using align pins as guide. Put back in place the provided screw (N) (using 3/16" Ball-End Screwdriver (AA) provided). Make sure that no wires or aircraft cable are placed in between the extrusions, preventing the fixtures to be joined. Tighten the screw (N) to pull the extrusions together.

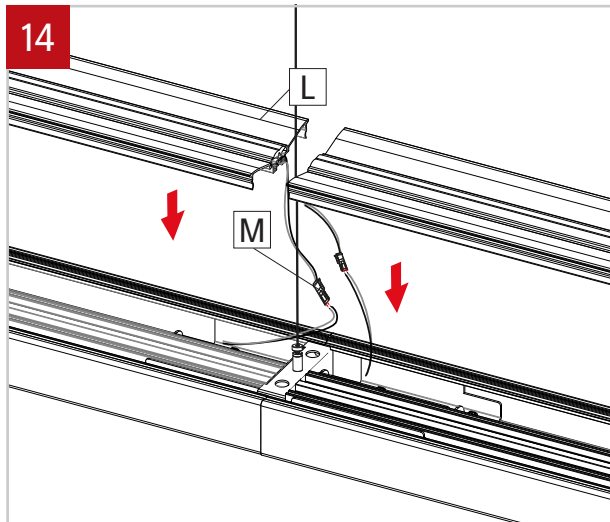

Put the top cartridges (L) back by connecting the quick connectors (M).