

**MEDIUS**

PENDANT DIRECT/INDIRECT



**LUMENWERX**


**CHROMAWERX TUNABLE WHITE AND DIM TO WARM**

**DESCRIPTION**


Within its compact 1 15/16" x 4 3/4" profile, Medius supports a choice of outstanding optics for high performance direct/indirect lighting. The result is excellent visual comfort with UGR better than 16, smooth ceiling uniformity, and efficacy up to 116 LPW. A new sliding cable arrangement simplifies installation in existing spaces. Medius configures as individual luminaires or continuous runs and features the full range of electrical and control options. For static white see separate specification sheet.



**SPL** - Specular parabolic louver

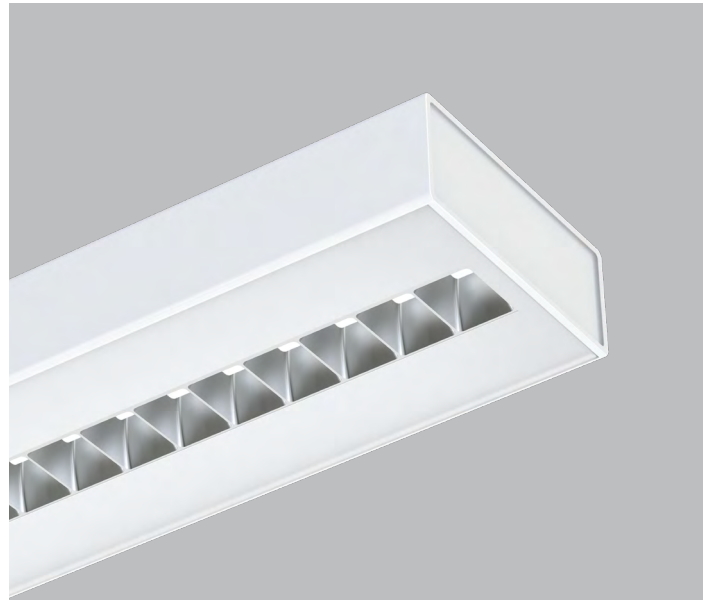

**MPL** - Matte parabolic louver

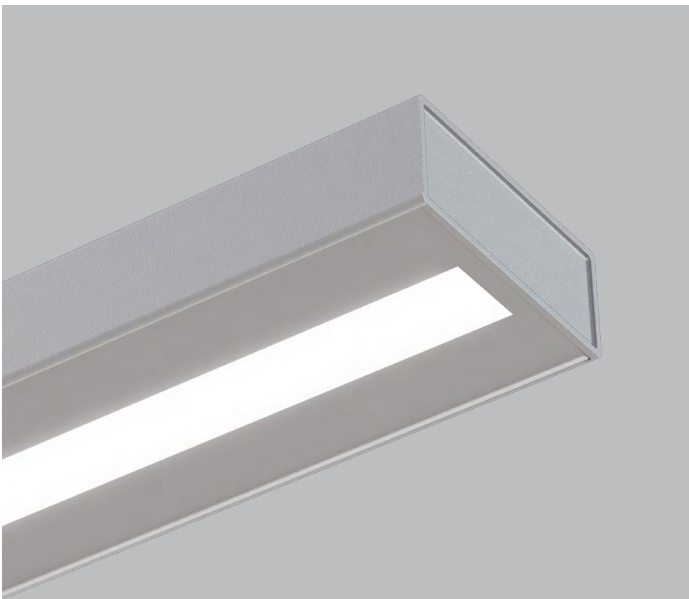

**HLO** - High-Efficiency Lambertian Optic

# MEDIUS

PENDANT DIRECT/INDIRECT



# LUMENWERX

## CHROMAWERX TUNABLE WHITE AND DIM TO WARM

**IMPORTANT: a qualified DMX integration consultant is required to ensure proper installation and function of any DMX network**

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

### ORDER GUIDE

MEDPDI		WIO2	LED		
LUMINAIRE ID	DIRECT OPTICS	INDIRECT OPTICS	LIGHT SOURCE	CRI	DIRECT LUMEN PACKAGES
MEDPDI - Medius Pendant Direct/Indirect	<b>SPL</b> - Specular parabolic louver <b>MPL</b> - Matte parabolic louver <b>HLO</b> - High-Efficiency Lambertian Optic	<b>WIO2</b> - Widespread Indirect Optics	<b>LED</b> - High performance LED	<b>80</b> - 80CRI <b>90</b> - 90CRI	<b>350</b> - Min. eco low output 350lm/ft <b>500</b> - Low output 500lm/ft <b>750</b> - Medium output 750lm/ft <b>1000</b> - Max. high output 1000lm/ft <b>####</b> - Other required lm/ft

INDIRECT LUMEN PACKAGES	CHROMAWERX	LUMINAIRE LENGTH	VOLTAGE	DRIVER
<b>500</b> - Min. low output 500lm/ft <b>750</b> - Medium output 750lm/ft <b>1000</b> - Max. high output 1000lm/ft <b>####</b> - Other required lm/ft	<b>DUO</b> - Tunable white 2-channel control 65k to 27k <b>SOLA</b> - Dim to warm single channel control 35k to 22k	Available sections - 4', 8' & 12' <b>#FT</b> - Nominal length in feet ( <b>2' increments only</b> ) Continuous Run - for luminaires over 12' Minimum Individual section 4'	<b>120</b> - 120V <b>277</b> - 277V	<b>DMX</b> <sup>1</sup> - (Duo only) To specify see pages 7 to 12 <b>DA</b> <sup>1</sup> - DALI (Duo only) local on-site commissioning is required <b>O-10</b> - Single 0-10V input (Sola) or dual 0-10V input for CCT/Intensity (Duo) <b>PSQO</b> <sup>1</sup> - Lutron T-Series 1% Tunable White (Duo only)

<sup>1</sup> On-site commissioning required.


1	ELECTRICAL	MOUNTING	FINISH	OPTIONS
	1 - 1 Circuit	<b>53WAC36</b> - Fixed cables suspension power 5" + non power 3" white canopy (36" air craft cable) <b>SC53WAC36</b> - Sliding cables suspension , power 5" + non power 3" white canopy (36" air craft cable) <b>55WSW18</b> - Power 5" + non power 5" white canopy & stem (18" stem) <a href="#">For all other options refer to our Pendant Mounting Guide</a>	<b>W</b> - Matte white <b>AL</b> - Aluminum <b>CF#</b> - Custom finish specify RAL#	<b>FU</b> - Fuse <b>TB#</b> - T-bar caddy clip specify grid size <b>TG#</b> - Tegular caddy clip specify grid size <b>ST</b> - Screw Slots caddy clip <b>CU</b> - Custom

### DMX WALL CONTROLS


To specify see pages 7 to 12

See page 2 for ordering code detailed information

### CROSS SECTION




**MEDPDI - SPL & MPL**  
Specular & Matte parabolic louver



**MEDPDI - HLO**  
High Efficiency Lambertian Optic



### ANSI C78.377-2015

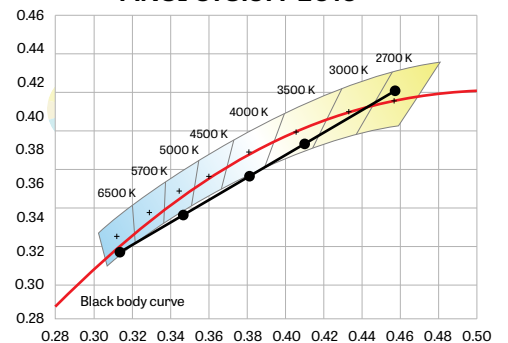



## CHROMAWERX TUNABLE WHITE AND DIM TO WARM

### DIRECT OPTICS

#### Parabolic Louvers (SPL and MPL)

Parabolic louvers provide excellent shielding and a pleasing crisp visual texture. The precisely molded louvers consist of 1" deep blades and side reflectors with shielding of 50° lengthwise and 45° cross wise.

Precise brightness control provides excellent UGR and satisfies the recommendations of ANSI IES RP1-12 for intensive VDT viewing with practical spacing criteria of 1.1. Choose from Specular (SPL) or Matte (MPL) louver finish.

**HIGH EFFICIENCY LAMBERTIAN OPTIC (HLO)** The High-Efficiency Lambertian Optic (HLO) shielding of diffusing 0.075" thick acrylic with up to 88% transmission and good source obscuration is combined with matte white side reflectors to create an efficient optical chamber with uniform luminosity. Luminaire brightness is controlled by the flux-to-shielding area ratio. For visual comfort, avoid high lumen output unless Medius is installed in a high ceiling application. Spacing criteria: 1.2 (longitudinal) x 1.1 (lateral).

### INDIRECT OPTICS

#### WIDESPREAD INDIRECT OPTICS (WIO2)

The Widespread Indirect Optic (WIO2) is a horizontal LED array with a widespread indirect micro prismatic optic that offers an impressive 160° spread. WIO2 creates an even illumination for smooth brightness on the ceiling that can achieve uniformity ratios of up to 2:1. Uniformity [max/min]

Based on 18' continuous runs, in a 20' x 40' room, 10' wall height.

Mounting height from ceiling	Spacing (Center to center)		
	8'	10'	12'
12"	5.5	10.0	9.0
18"	3.5	6.0	6.0
24"	2.5	4.0	4.5


### LIGHT SOURCE - LED

Custom linear array of alternating color temperature mid-flux LED's are mounted directly to the housing for optimal thermal performance. For the Duo products, a color temperature range from 2700K-6500K is achievable with color points on or below the black body curve. For the Sola products, a color temperature range from 2200K-3500K is controlled synchronously with intensity. Color consistency between fixtures is maintained to within 3SDCM. LEDs are operated at reduced drive current to optimize efficacy and lumen maintenance.

All LED's have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

### LUMINAIRE LENGTH


Medius is made up of standard 4, 8 and 12 foot sections that may be joined together to create longer continuous run lengths. Nominal run length must be noted in the product code. The minimum individual section available is 4 foot. All individual sections are joined together onsite using the joiner kits provided. LumenWerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.



Joiner kit system for Medius Direct/Indirect

### CHROMAWERX - TUNABLE WHITE

#### ANSI C78.377-2015

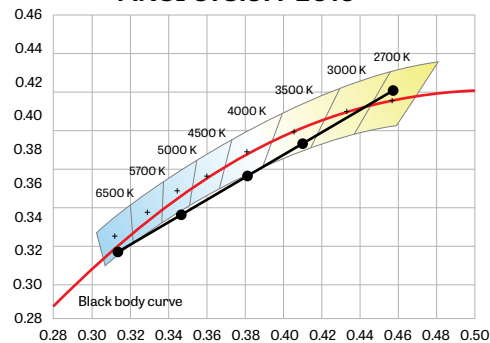

**ChromaWerx Sola** is single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple digital or analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable but the default option runs from 3500K at 100% of full power to 2200K at 5% of full power. CRI is maintained above 80 throughout the dimming range.

**ChromaWerx Duo** is two-channel control. It uses an analog (0-10V) protocol for separate control of luminaire CCT and intensity or a digital (DMX, DALI) protocol for synchronous control of both warm and cool LED arrays to enable the user to set color temperature and light output. Commonly called "tunable white", ChromaWerx two-channel control provides the range of warm (2700K) to cool (6500K) color that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The ChromaWerx drivers are programmed to limit maximum light output and power usage across all color temperatures. CRI is maintained above 80.



## CHROMAWERX TUNABLE WHITE AND DIM TO WARM

### ELECTRICAL

#### DMX (Duo only)

Factory-set, adjustable output current, multi-channel LED driver with universal (120-277VAC) input. Using DMX wall controls (optionally supplied by LumenWerx) or an existing DMX control system, two channels of LEDs (warm-white & cool-white) are independently adjustable. Each DMX driver has multiple output channels that can be independently addressed at the factory or on-site using built-in RDM (Remote Device Management) functionality. Dimming range from 100%-0%. At maximum driver load, efficiency<89%, PF>0.9, THD<20%.

#### DALI (Duo Only)

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. Dimming range from 100%-0%. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

#### 0-10V (Sola)

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using a single 0-10V control signal, the light output warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

#### 0-10V (Duo)

Factory-set adjustable output current LED driver with universal (120-277VAC) input. Controlled via two individual 0-10V signals, one for setting light output down to a minimum of 1% and the other for adjusting the CCT (default range of 2700K-6500K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF>0.9, THD<20% at 100% load conditions.

**Access:** Driver is accessible for field service by removing the upright LED and light guide cartridge

### MOUNTING OPTIONS

Fixtures can be pendant-mounted, using aircraft cables, or stem-mounted. Unless otherwise specified, LumenWerx provides the following hardware:

**Fixed Cable Suspension:** aircraft cable mounts at luminaire ends or between modules in continuous runs and is secured by Griplock fastener for leveling.

**Sliding Cable Suspension:** Two-part cable assembly slides horizontally for flexible mounting. Griplock fastener secures and levels suspension.



53WAC36 - Fixed Cables suspensions



HS53WAC36 - Sliding Cables suspensions

**For cable-mounted fixtures** - 53WAC36 (5" white canopy for all power mounting point, 3" white canopy for non power mounting point, and a 36" cable)

**For stem mounted fixtures** - 55WSW18 (5" white canopy for all power mounting point, and non power mounting point, and a 18" white stem)

**Caddy clips**, if required specify under **OPTIONS**

[For all other options, see our website for a detailed Pendant Mounting Guide](#)

### FINISH

**Interior** - 95%, reflective matte powder coated white paint

**Exterior** - matte white, matte black or aluminum powder coating

**Side reflector** - high reflective white coating

Custom finishes are also available.

### CONSTRUCTION

**Housing** - Extruded aluminum 0.085" nominal, matte white or aluminum powder coating  
Custom finishes are also available.

**End cap** - Die cast Aluminum (0.95" nominal)

**Joiners** - Die cast Aluminum (0.95" nominal)

**Reflectors** - High reflective white coated bent aluminum

**Parabolic louvers** - Injection Molded Optical Grade Polycarbonate Vacuum Metalized, up to 95% reflective

**Light guide** - Clear PMMA Laminated with microstructure film formed into optical TIR/extraction form

**Hanger** - Chromed Griplock securely attached in end caps and/or joiners with a hex nut

**Air craft cable suspension** - Fixed 7x7 braids Aluminum air craft cable 0.06" thick  
Cable Suspension: aircraft cable mounts at luminaire ends or between modules in continuous runs and is secured by Griplock fastener for leveling.

**Sliding Cable Suspension:** Two-part cable assembly slides horizontally for flexible mounting. Griplock fastener secures and levels suspension.

**Stem** - 0.5" diameter threaded steel tube matte white or aluminum powder coating.  
Custom finishes are also available



## CHROMAWERX TUNABLE WHITE AND DIM TO WARM

### WEIGHT

**Medius 4 ft** - 10.3 lbs, 4.7kg

**Medius 8 ft** - 19.4 lbs, 8.8kg

**Medius 12 ft** - 28.5 lbs, 12.9kg

### CERTIFICATIONS

**ETL** - Rated for Indoor Dry/Damp locations.

Conforms to UL Standard 1598 and certified to

CAN/CSA Standard C22.2 No. 250.0.

### WARRANTY

For all ChromaWerx products, LumenWerx provides a three-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics.

LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

Wall controllers are covered by the manufacturer warranty.



CHROMAWERX TUNABLE WHITE

**DUO** DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES


Do you require a wall controller provided by Lumenwerx?

NO

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

DMX controller supplied by Lumenwerx

**How many zones do you have?**  
A zone consists of one or more luminaires behaving identically.




1 Zone



2 Zones

**How to calculate the required number of drivers:**

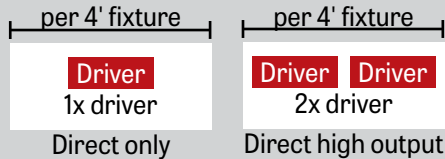

To Calculate # of drivers

1 - 4 Zones

5 or more Zones

Do you have more than 32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller.

**WALL CONTROLLER**

**WCW** - wall controller white  
**WCB** - wall controller black

Add the control code at the end of your order code. Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller. Refer to your DMX integrator for the installation. ✓


Subject to factory evaluation. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓



## CHROMAWERX TUNABLE WHITE

### GENERIC DMX NETWORK ARCHITECTURE

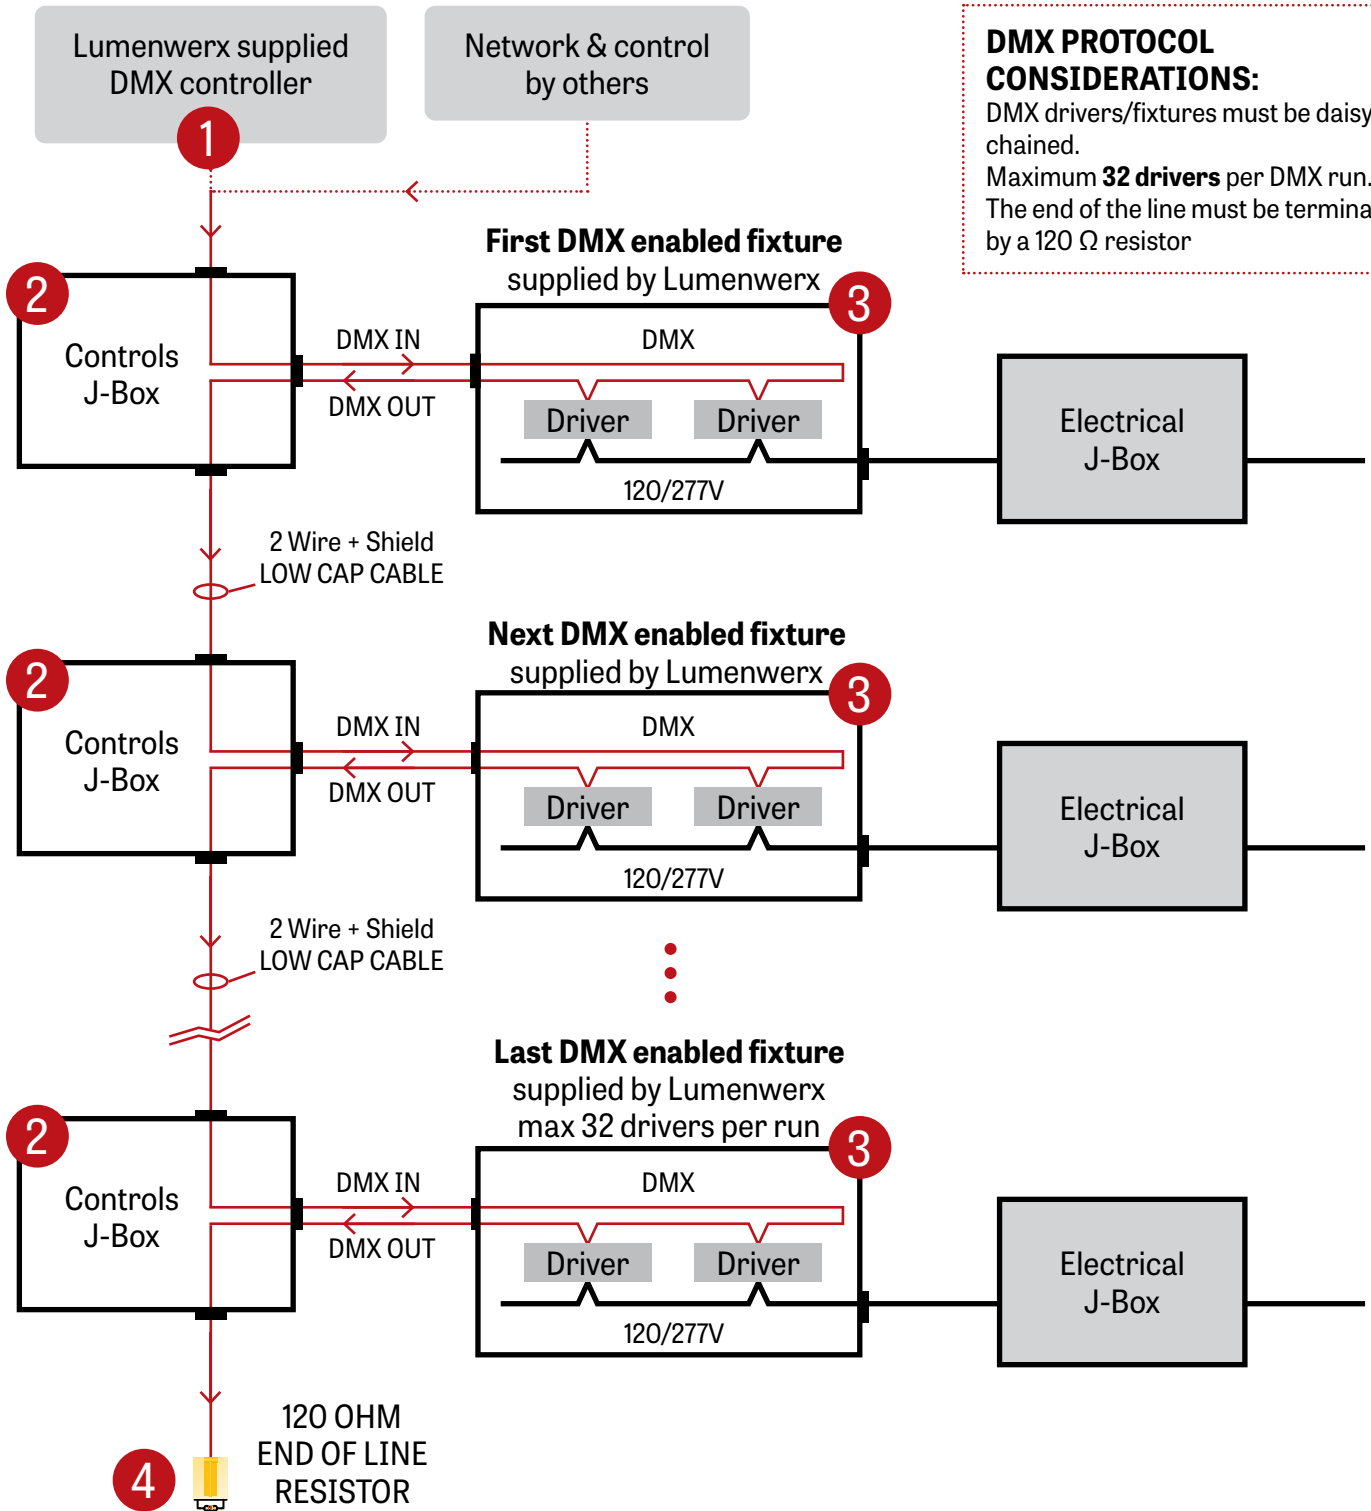




## CHROMAWERX TUNABLE WHITE

### 1 LUMENWERX SUPPLIED DMX CONTROLLER

To the first fixture

2 Wire +  
Shield Low Cap Cable

WALL BOX SUPPLIED BY OTHERS

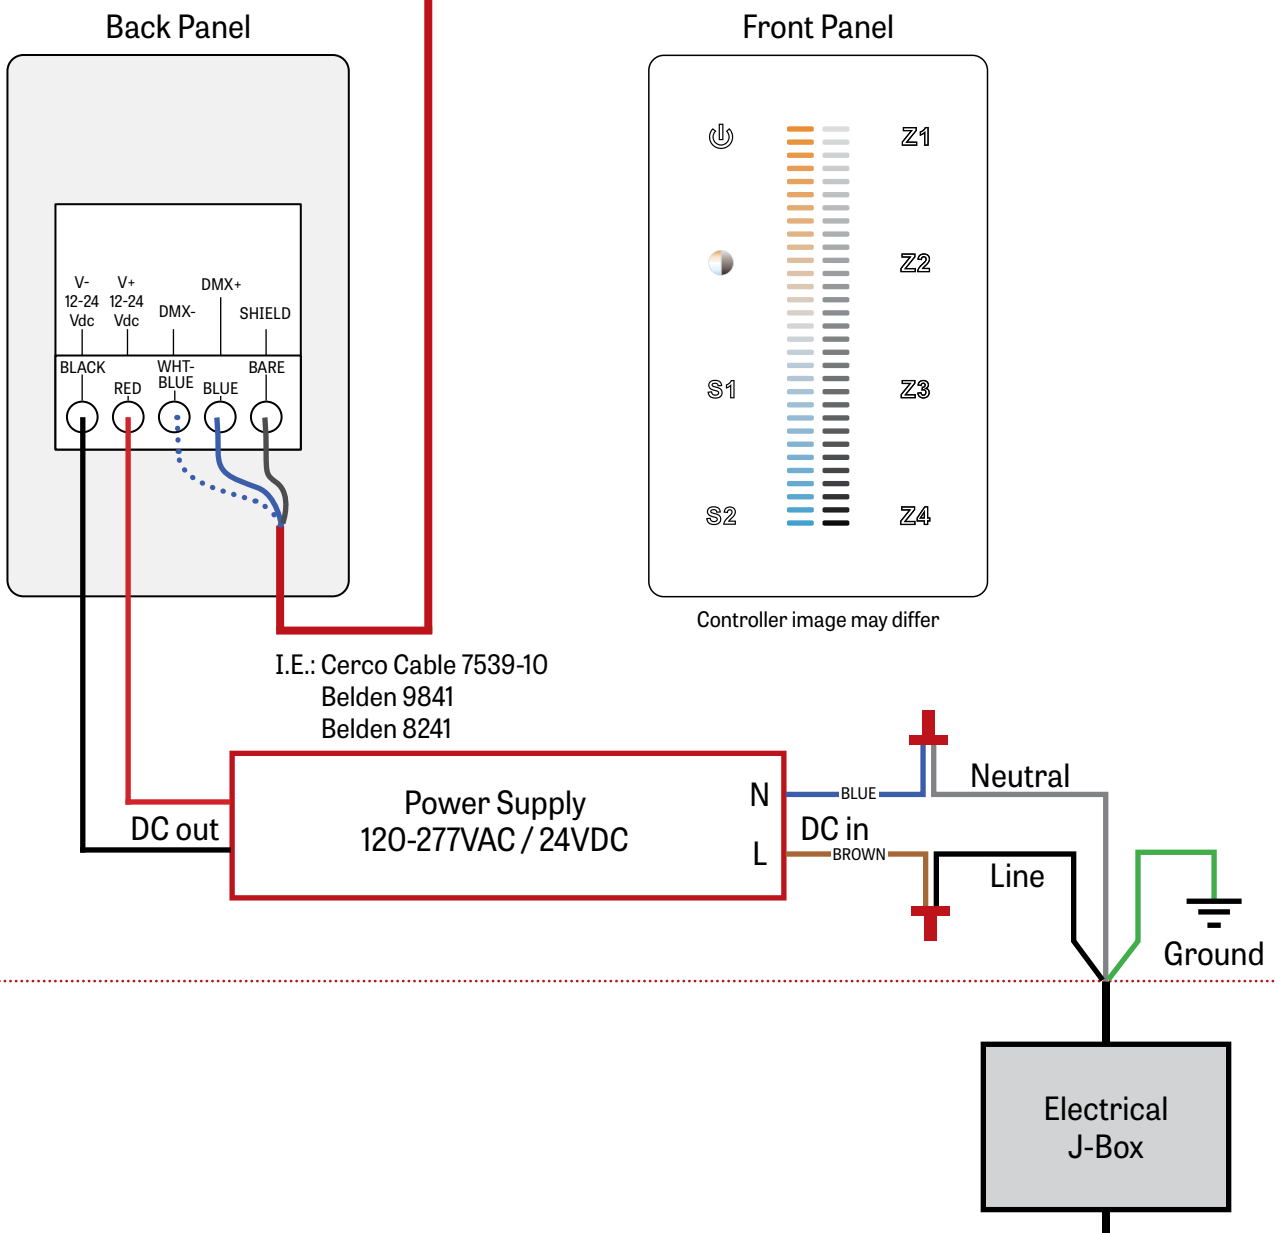






CHROMAWERX TUNABLE WHITE


2 J-BOX DMX DAISY CHAIN DETAIL

Low capacitance DMX Cable from Previous Fixture

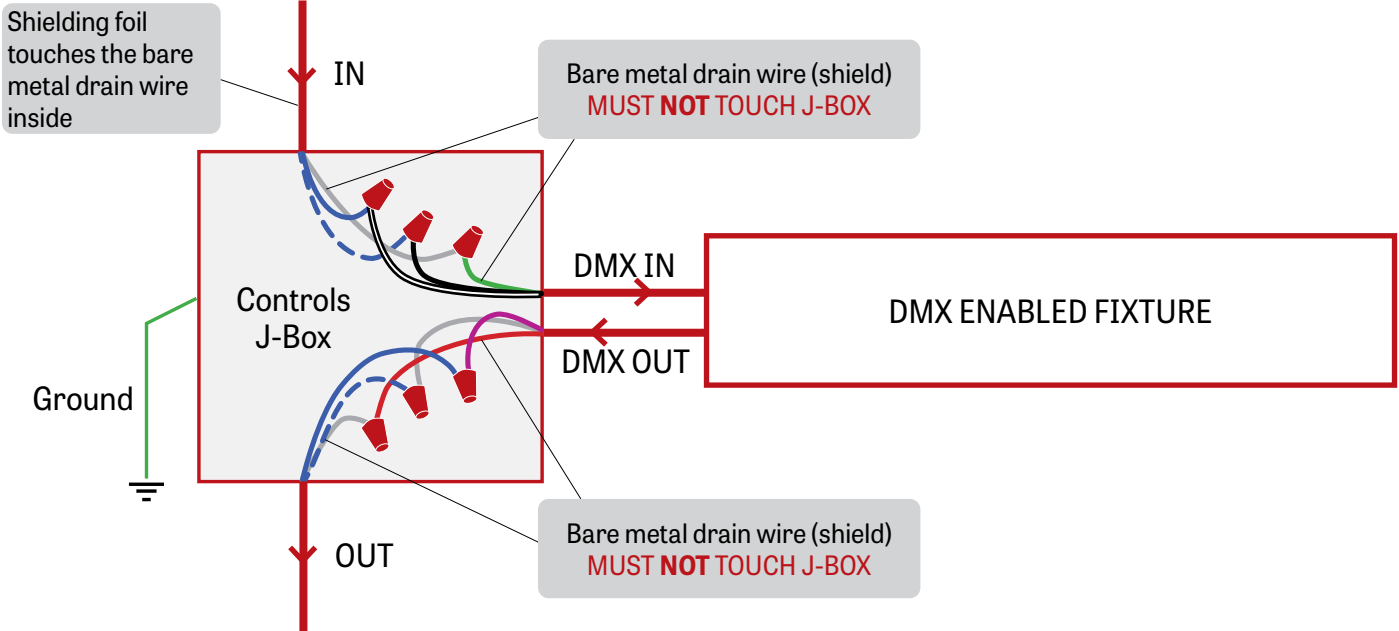

Low capacitance DMX cable to next fixture


3 DMX CONNECTION PENDANT & WALL

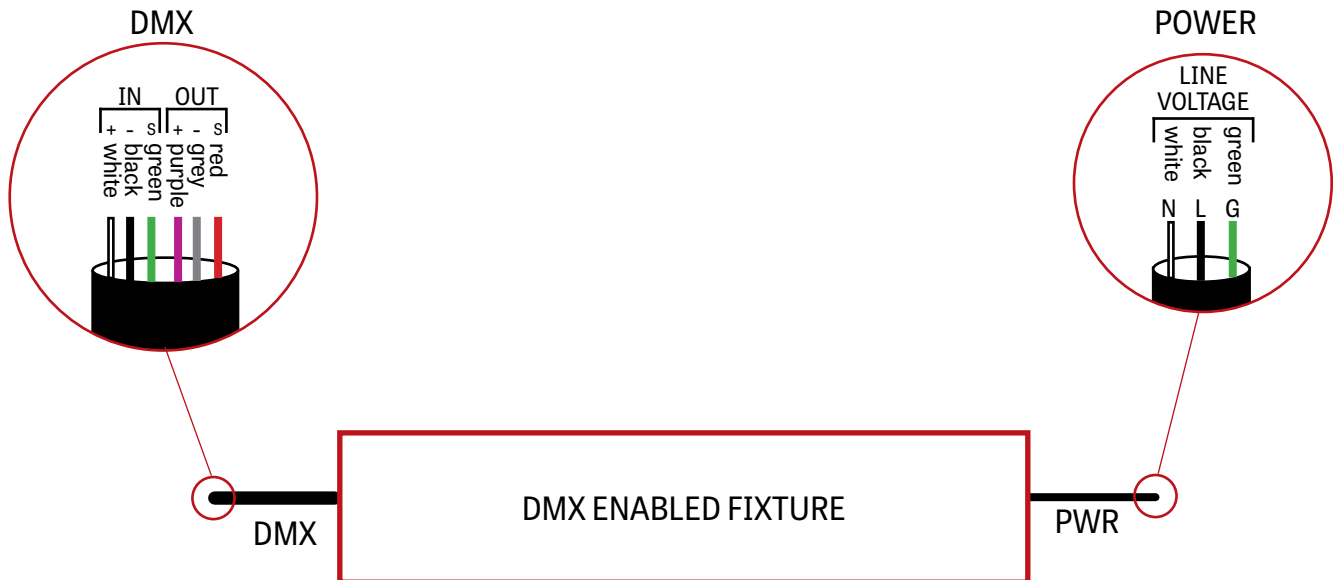




## CHROMAWERX TUNABLE WHITE

### 4 DMX LAST FIXTURE DETAIL

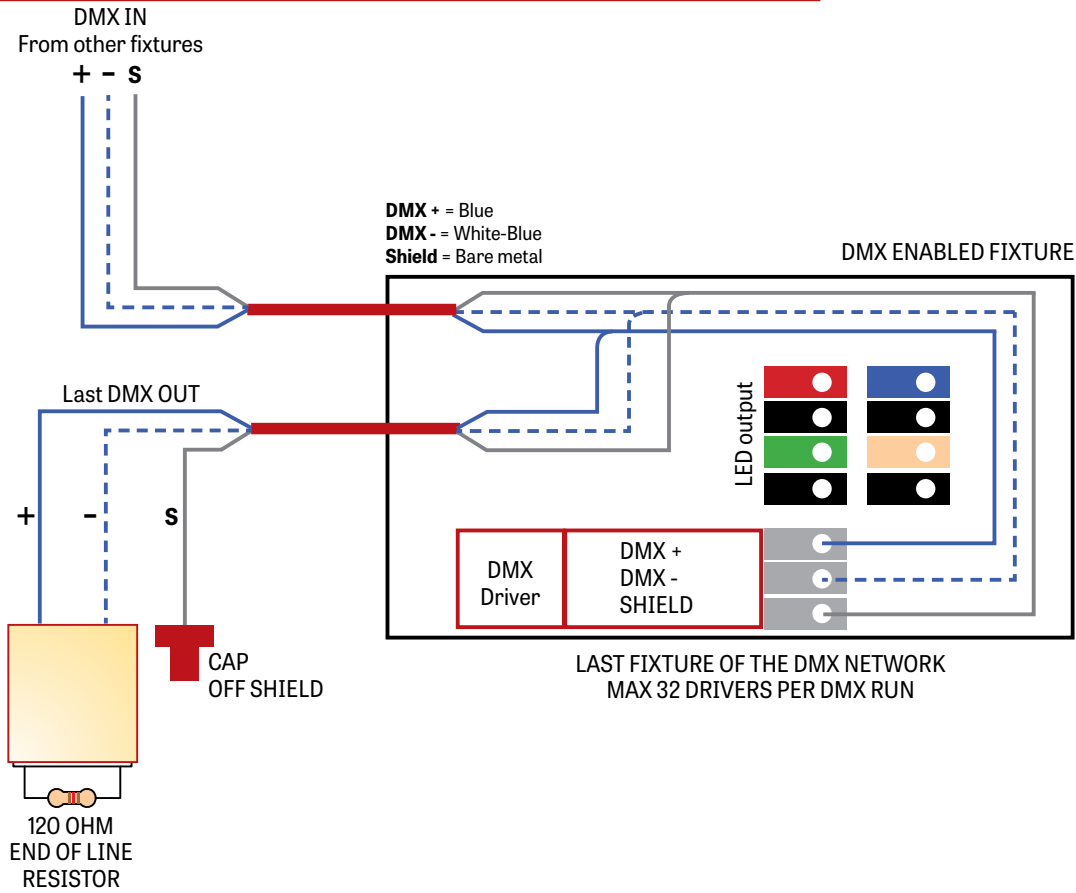

### DMX WALL CONTROLLER

#### DUO 1-4 ZONE

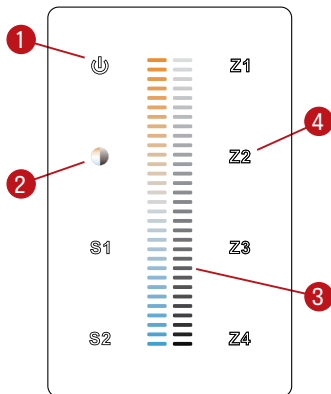

- (1) Power: Use this button to turn ON or OFF the fixture.
- (2) Brightness/CCT: Use the color/brightness toggle button to choose between color/brightness. When Blue: brightness is selected, when Yellow: color is selected.
- (3) Slider: Depending on the mode chosen in step 2, the slider will allow the user to set desired color or brightness.
- (4) Zone select: Up to 4 zones can be selected either independently or together. Once selected, the commands will be sent to the zone identified by a Blue LED.

#### Default DMX Addresses:

- 1 Warm
- 2 Cool