


NOTE: Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

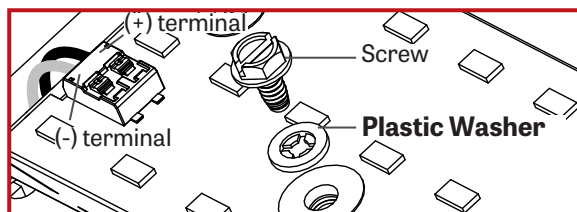


1 SINGLE FIXTURE

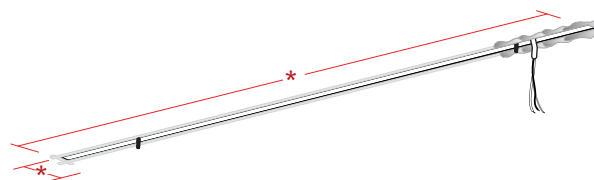


Prepare the area where the fixture is going to be installed. Cut hole in the drywall according to the dimensions [*] in the client drawings.

2

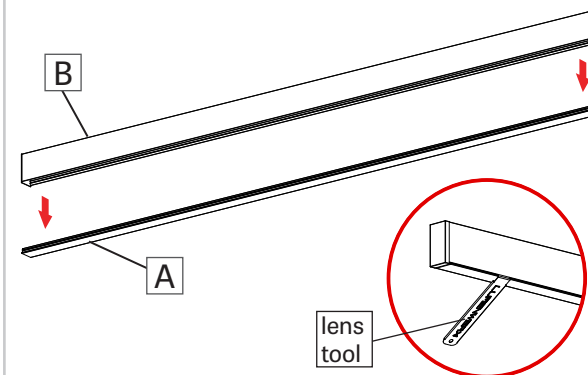


Remove the lens (A) from the fixture (B) with the included lens tool.

3

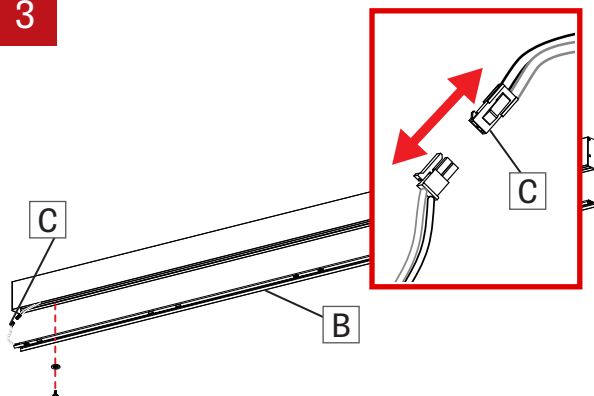


Disconnect the molex quick connector (C) from the LED board. Unscrew the cartridge (B) and remove it from the fixture. Place the cartridge in a safe place.

4

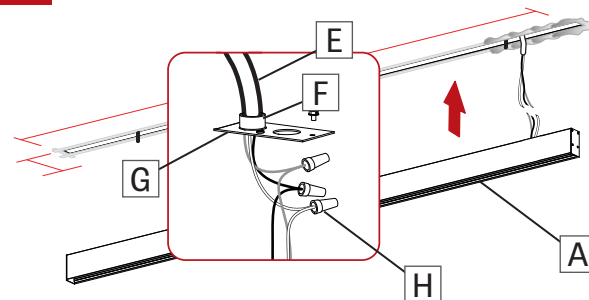


Install power cable (E) (by other) through the BX connector (F) (by other) and install onto the power plate (G) provided. Make electrical connections between power cable (E) and fixture cables using electrical marettes (H). Reinstall the power plate (G) to the fixture (A).

5

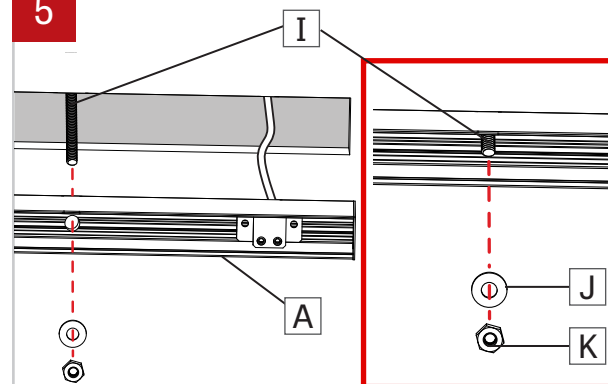


Insert the fixture (A) into the pre-cut hole in drywall, aligning the threaded rods (I) with the holes on top of the fixture (A). Put washers (J) and tighten nuts (K) to secure the fixture (A).

6

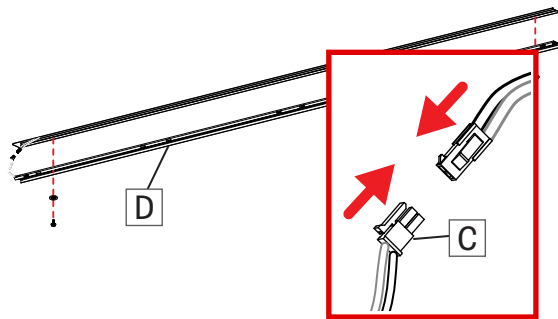

Reconnect the moxex quick connector (C) to the LED board. Screw the cartridge (D) back in place by **using screw with plastic washer. Do not apply too much pressure.**


7

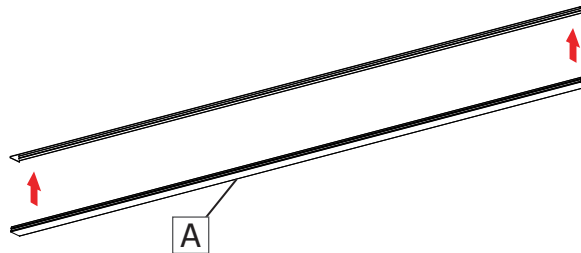

Reinstall the lens (A).


8

CONTINUOUS SYSTEM

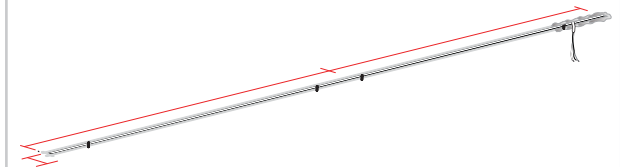


Prepare the area where all the fixtures are going to be installed. Cut hole in the drywall according to the dimensions [*] in the client drawings.

9

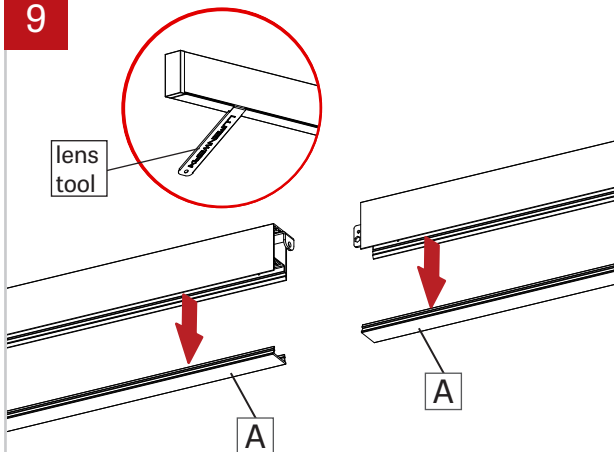


Remove the lenses (A) from all the fixtures in the run with the included lens tool.

10

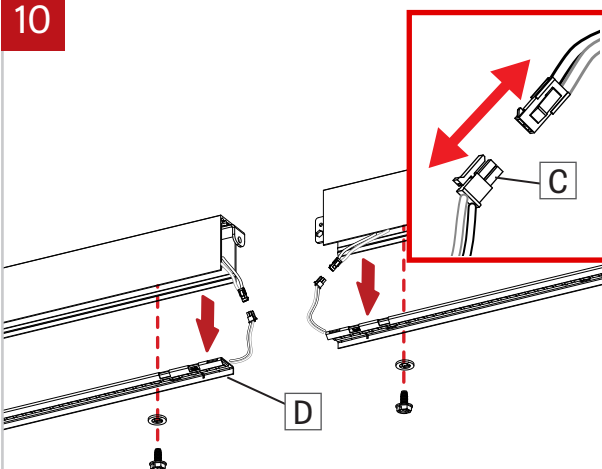

Disconnect the moxex quick connector (C) from the LED board. Unscrew the end cartridges (D) and remove them from the fixture. Place the cartridges in a safe place.

11

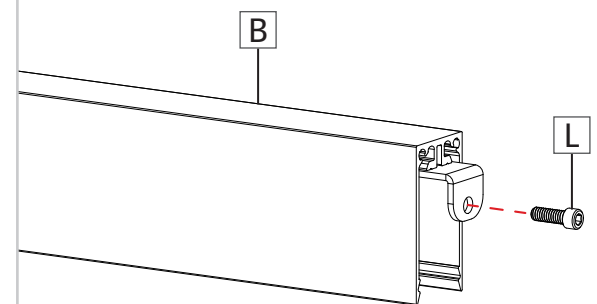

Apply steps 4 and 5 to the first fixture (B) in the run. Remove the screw (L) on the joiner and put it in a safe place.

