


NOTE: Wire dimming conductors as Class 1


1

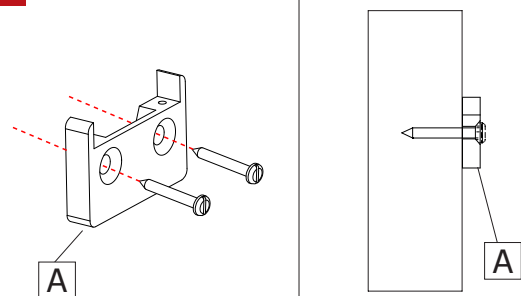

SIDE VIEW


Locate wall bracket position using provided client drawing. Install mounting brackets (A) to wall. Align with structural stud (need double studs – distance between screws is 1.250”) or use metal anchors with min. length 1.250”. Flat head Philips drive screw, nominal size #10, min. length 1.250”.

2

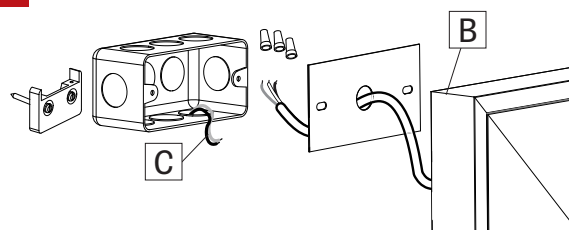

Make electrical connection between fixture (B) and wall power cable (C).

3

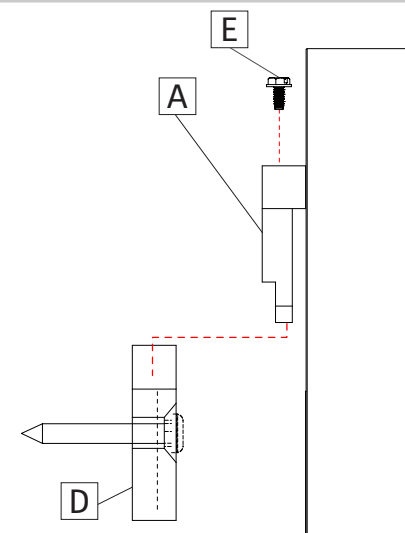

Insert fixture bracket (D) into wall bracket (A), and secure in place with supplied screw (E).