


# NOVA-VEGA FLUORESCENT

## GRID CEILING - INSTALLATION

**IMPORTANT:** Installation instructions are shown with Nova and applies to Nova and Vega fixtures


**NOTE:** Wire dimming conductors as Class 1

### 1 SINGLE FIXTURE

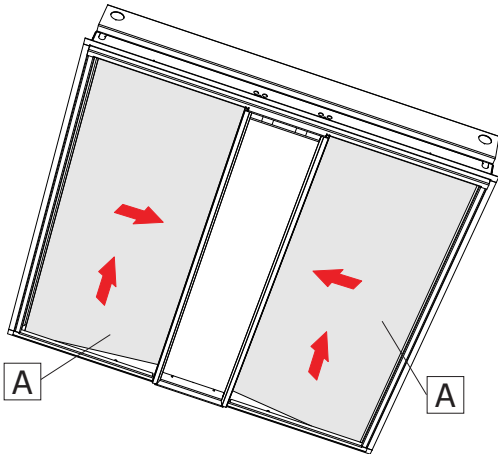


Make sure the power to the fixture is turned off. Remove the side lens (A) by sliding and pulling them.

2

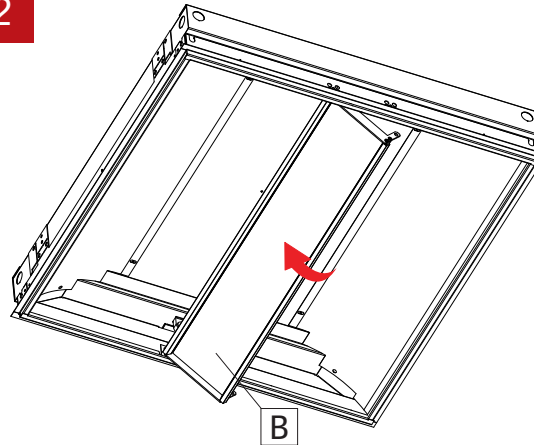


Pull the center basket (B) down to rotate.

3

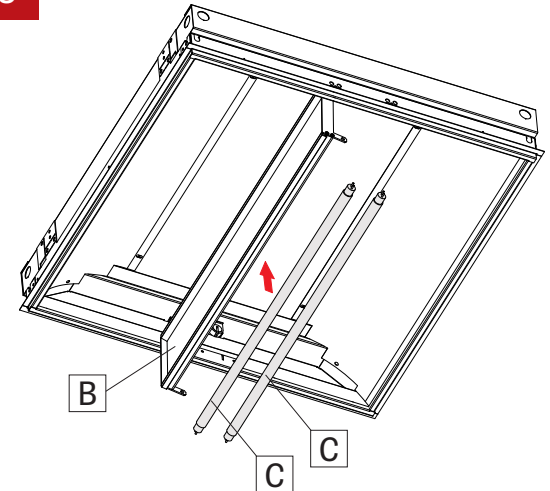


Install the lamps (C) and put back in place the center basket (B).

4

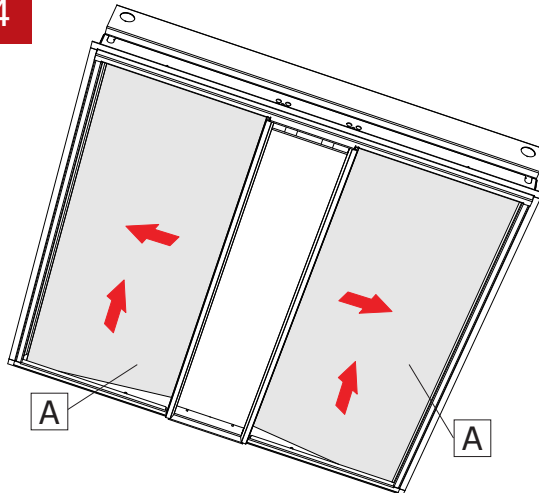


Reinstall the side lens (A).

5

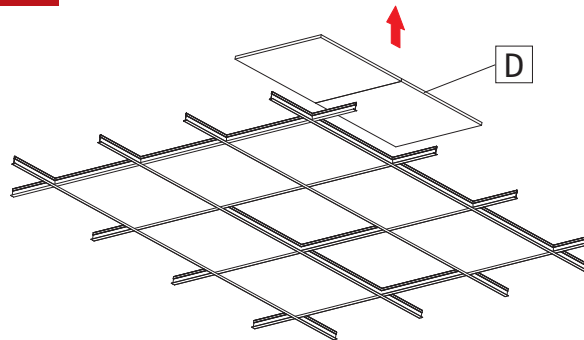

Remove ceiling tiles (D) where the fixture will be installed and adjacent tiles for easy access during installation.


6

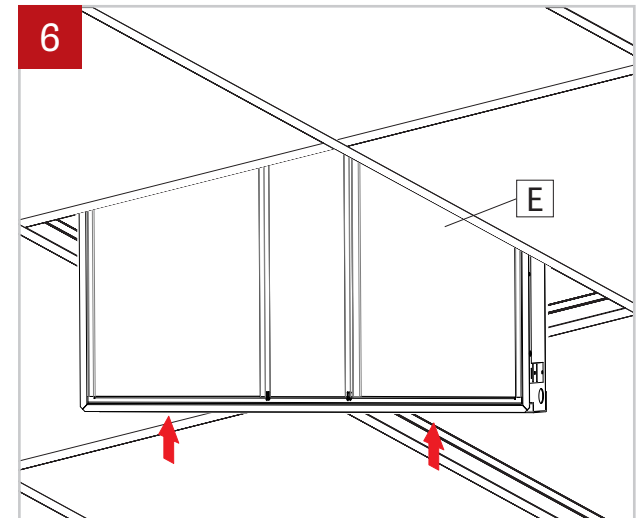


Insert the fixture (E) above the ceiling grid as shown.

# NOVA-VEGA FLUORESCENT


## GRID CEILING - INSTALLATION

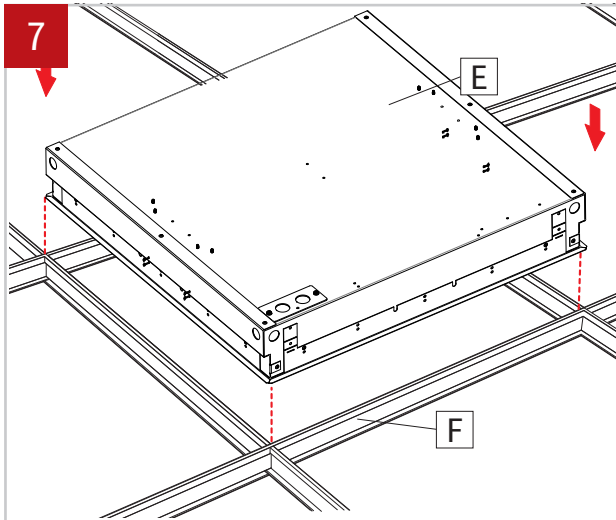


Insert fixture (E) into the t-bar grid (F).

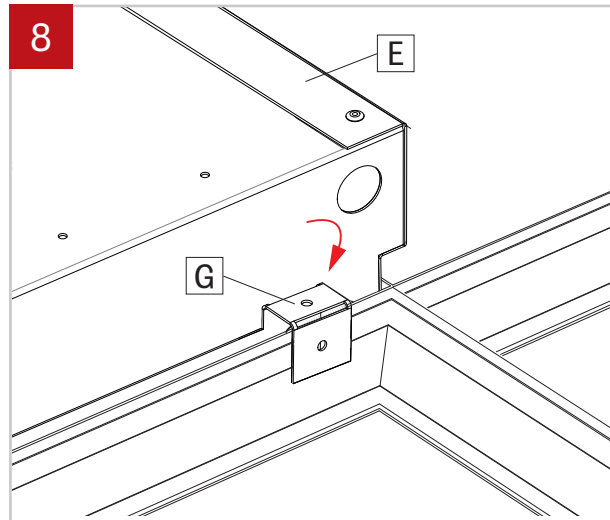


Bend the tab (G) on each corner of the fixture (E) to provide support.

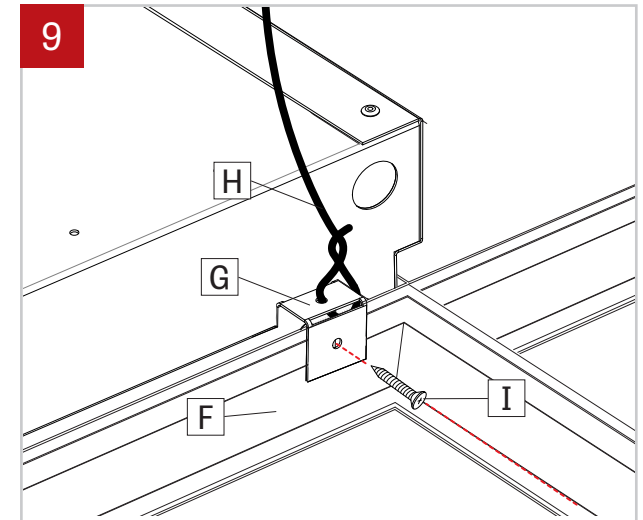


For additional safety a security wire (H) can be attached from the tabs (G) and a screw (I) can be used to fix the fixture to the T-bar grid (F).

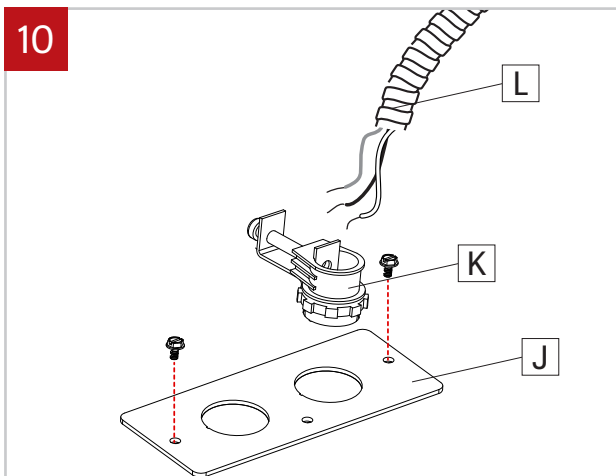

Remove power plate (J) from fixture and install BX connector (K) (by other) and BX cable (L) (by other) through the power plate. Tightened BX connector (K) screw.

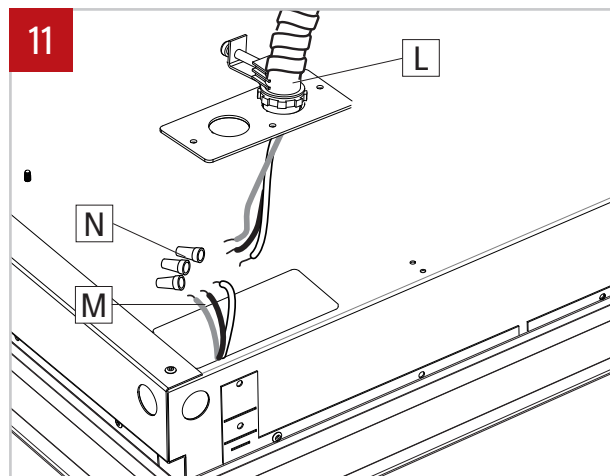

Connect cables from the BX cable (L) to the Fixture Driver cables (M) using wire nuts (N). Ensure connections comply with local and national electrical codes.

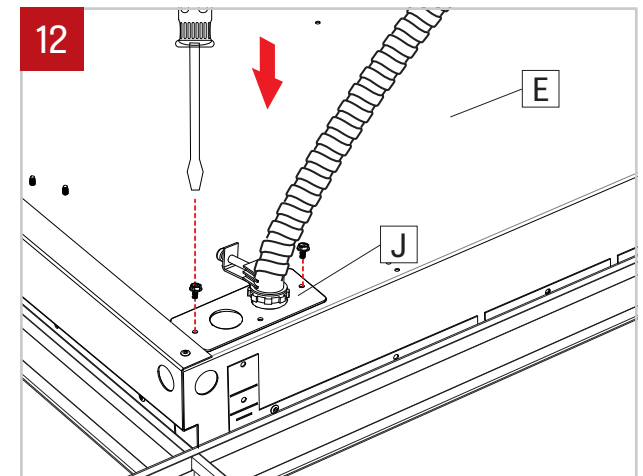

Push connected wires inside the fixture. Reinstall power plate (J) onto fixture (E) by refastening screws to power plate (J) and fixture (E).

# NOVA-VEGA FLUORESCENT

## GRID CEILING - INSTALLATION

13

