

### SAVE THESE INSTRUCTIONS

AND REFER TO THEM WHEN ADDITIONS TO OR CHANGES IN THE TRACK CONFIGURATION ARE MADE.

#### FOR USE WITH PIVOT TRACK SYSTEM ONLY

The track is only to be used with other electrical fittings identified for use with the track system.  
The modules are only to be used with the Pivot track system.

### IMPORTANT SAFETY INSTRUCTIONS:

When installing or using this track system, basic safety precautions should always be followed, including the following :

Read all of these installation instructions before installing the track system.

Wire dimming conductors as Class 1.

Make sure that the power to the track is turned off.

The track system is not intended for use with a power supply cord or convenience receptacle adaptor.

Recessed track is not intended to be pendant mounted such as by a stem or cable.

Do not install in wet or damp locations.

Do not cut any track sections.

Do not install any part of a track system less than 5 feet above the floor.

Do not install any luminaire assembly closer than 6 inches from any curtain or similar combustible material.

Disconnect electrical power before adding to or changing the configuration of the track. Do not attempt to energize anything other than lighting track luminaires on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.




This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

*Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.*

# PIVOT

Track - Recessed [PIVR]  
Grid Ceiling

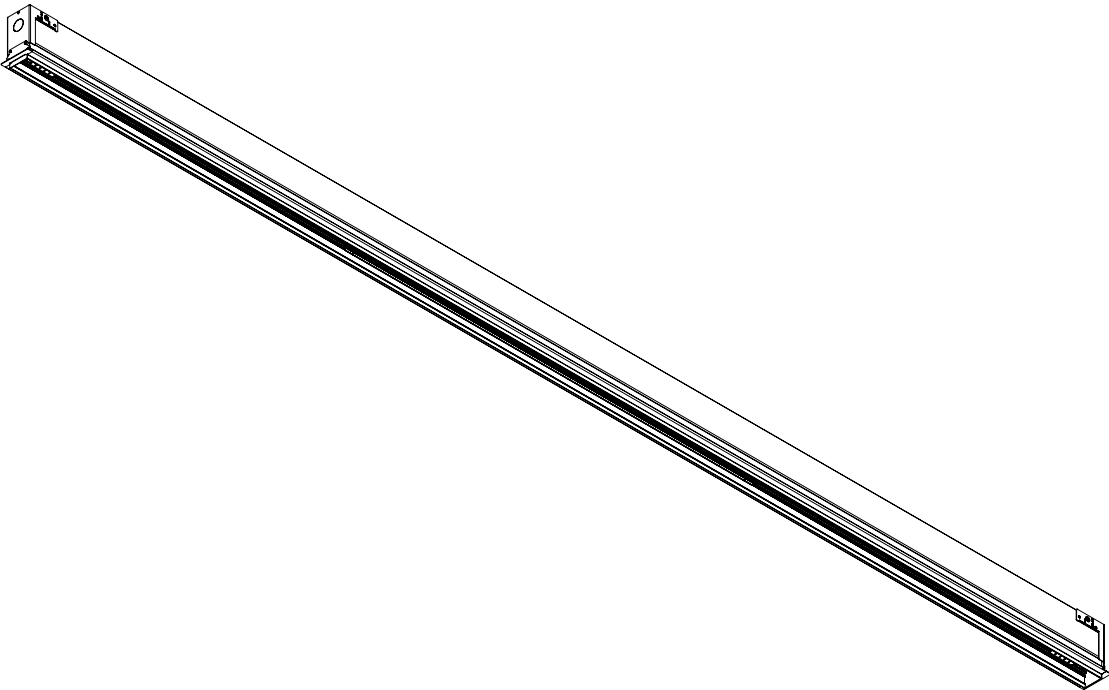


Index	
IMPORTANT SAFETY INSTRUCTIONS.....	P.1
SINGLE UNIT.....	P.3
CONTINUOUS RUN .....	P.4
MODULE INSTALLATION .....	P.5




## Installation Instructions

### MODULE


V-Lock

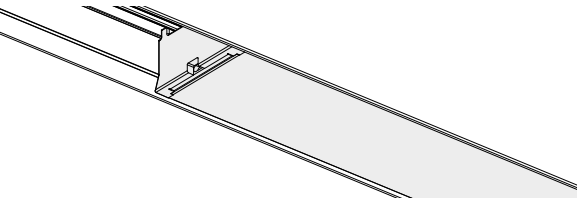


H-Lock

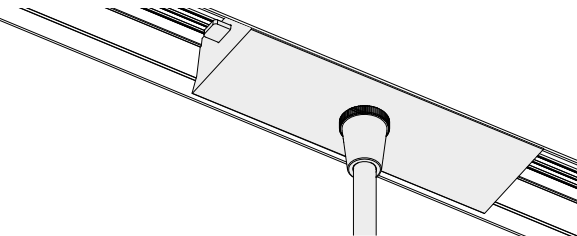

S-Lock

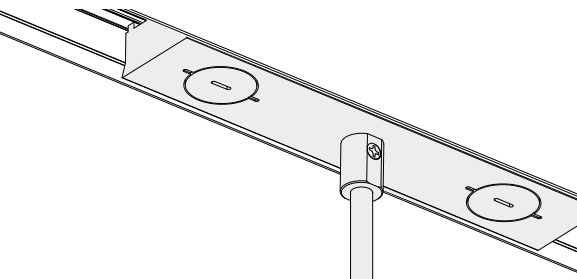

Blank

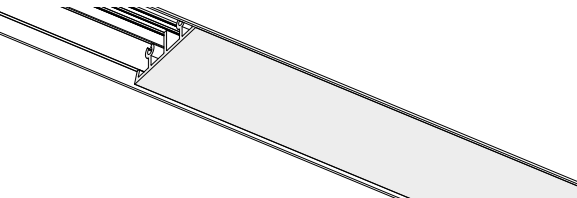

# PIVOT

## Track - Recessed [PIVR] Grid Ceiling




## Installation Instructions

### SINGLE UNIT



#### 1 PREPARE CEILING OPENING.

Remove ceiling tiles [A] where the fixture will be installed as well as the adjacent tiles for easy access during installation.

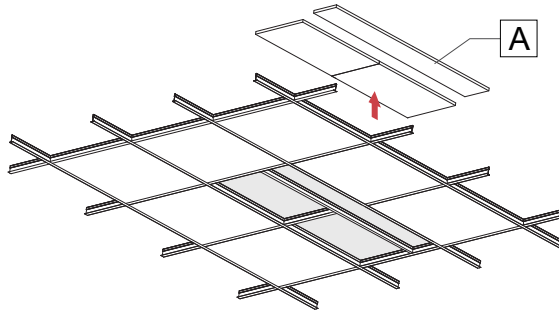

#### 2 PLACE FIXTURE ON T-BAR GRID.



Raise the fixture [B] above the ceiling and lower the fixture [B] onto the T-bars [C].

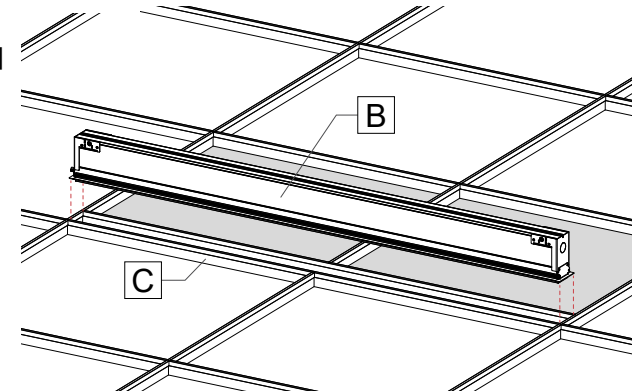

#### 3 SECURE FIXTURE.

Bend the tabs [D] on the end of the fixture.

Attach safety wires [E] to the tabs [D].

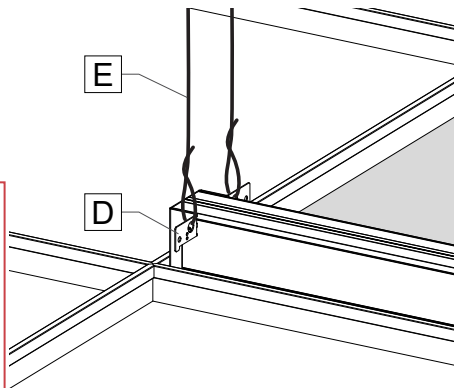


#### 4 MAKE ELECTRICAL CONNECTIONS.

Bring the main power cable [F] (by others). Remove the power knockout [C] from the fixture [B]. Make electrical connections between the power cable [F] and the fixture cable [H] using wire nuts [I] (by others).

**NOTE:** Number of wires may vary.

**NOTE:** Connect the green wire to your ground wire.

**WARNING:** A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

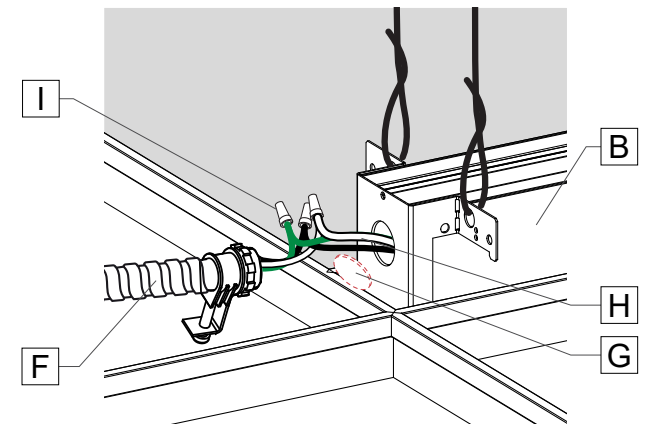

# PIVOT

## Track - Recessed [PIVR] Grid Ceiling




## Installation Instructions

### CONTINUOUS RUN

**1** FOR CONTINUOUS RUN, REPEAT STEPS **1** TO **4** FROM THE SINGLE UNIT SECTION FOR THE 1<sup>ST</sup> FIXTURE IN THE RUN, THEN:

**2** PLACE 2<sup>ND</sup> FIXTURE ON T-BAR GRID.


Raise the 2<sup>nd</sup> fixture [J] above the ceiling and lower the 2<sup>nd</sup> fixture [J] onto the T-bars [C].

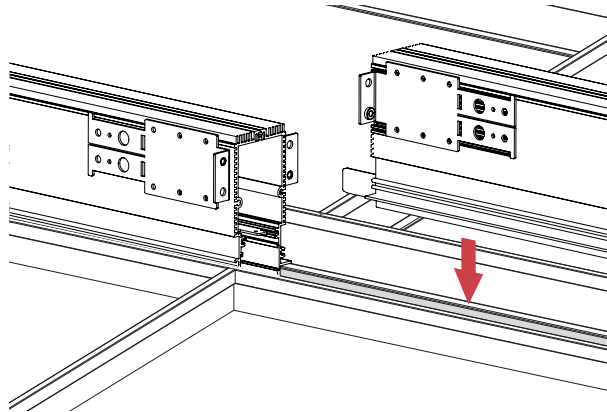

**3** MAKE ELECTRICAL CONNECTIONS BETWEEN FIXTURES.

Connect wires between fixtures using quick connectors [K]. Push wires inside the 2<sup>nd</sup> fixture [J].

**NOTE:** Number of wires may vary.


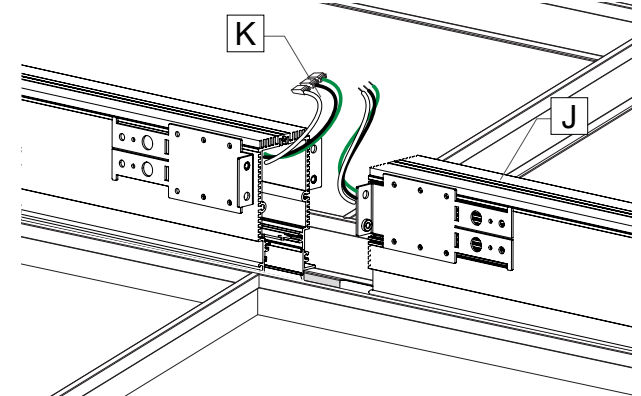


**4** JOIN FIXTURES.

Slide the 2<sup>nd</sup> fixture [J] to the 1<sup>st</sup> fixture [B] aligning the blades [L] and push the 2<sup>nd</sup> fixture [J] until it clicks in.

Secure the the joiner [M] using set screws [N].

Put the track cover [O] between fixtures and push until it clicks in.

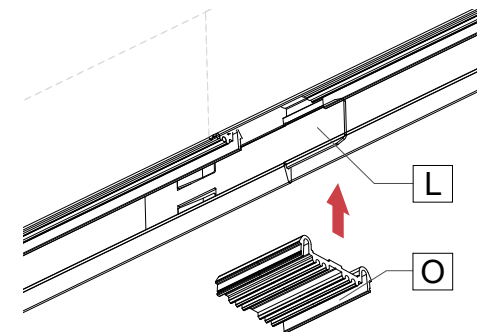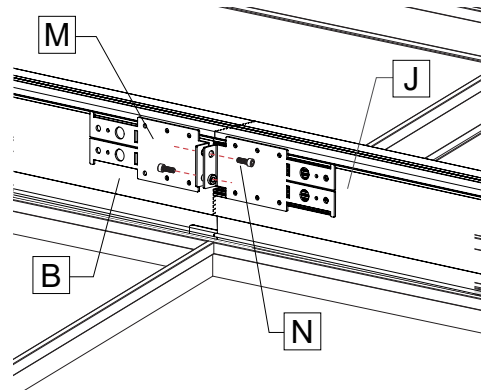

**5** REPEAT STEPS **2** TO **4** FOR THE REST OF THE FIXTURES IN THE RUN, THEN:

**6** REPEAT STEP **3** FROM THE SINGLE UNIT SECTION FOR THE REST OF THE FIXTURES IN THE RUN.

# PIVOT

## Track - Recessed [PIVR] Grid Ceiling

## Installation Instructions

### MODULE - V-LOCK


#### 1 INSTALLATION.

Push in the two tabs [A].

Insert the module [B] into the track [C].



Push in the locking mechanism [D] to secure the module [B].

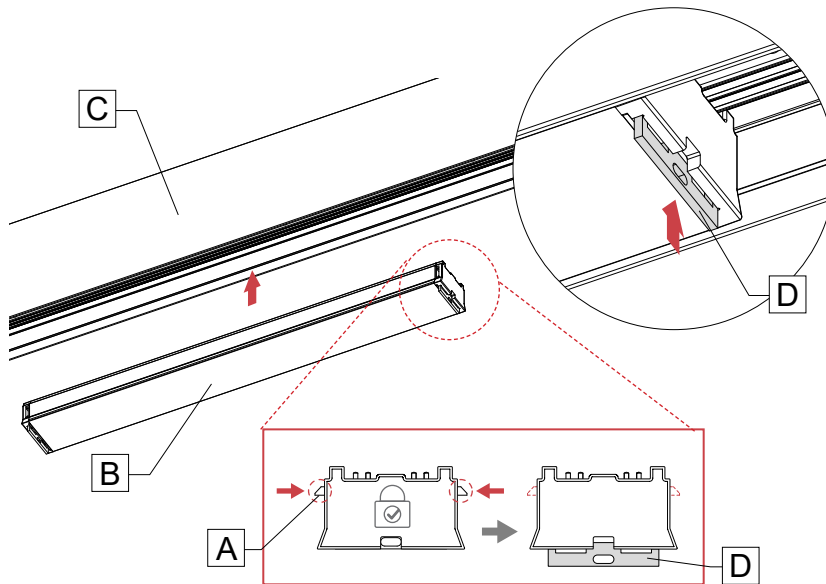


#### 2 REMOVAL.

Pull out the locking mechanism [D] on both sides of the module [B] using a small pointed tool.

**NOTE:** Hold the module to prevent it from falling.

Pull the module [B] out.

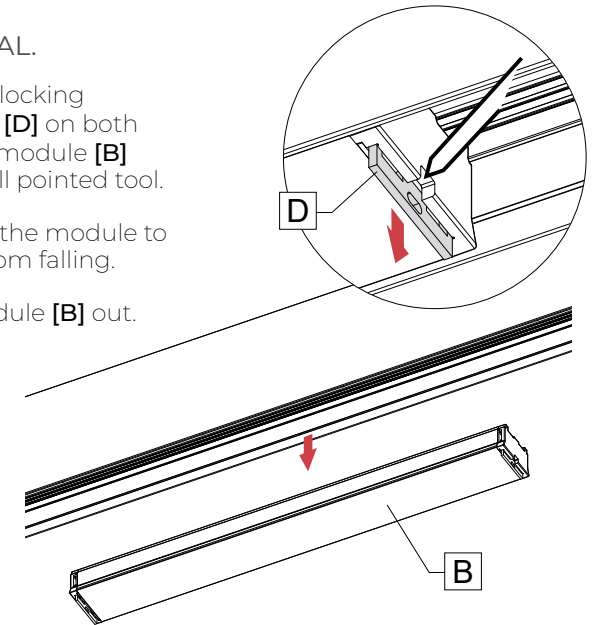


### MODULE - H-LOCK

#### 1 INSTALLATION.

Insert the module [A] into the track until it clicks.



Make sure module is properly installed by gently pulling down on the module.

**WARNING:** Improper installation may result in the module falling down.

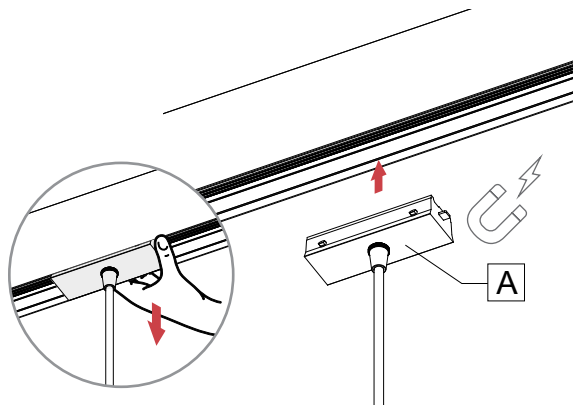

#### 2 REMOVAL.

Push in the two tabs [B] and pull the module [A] out.

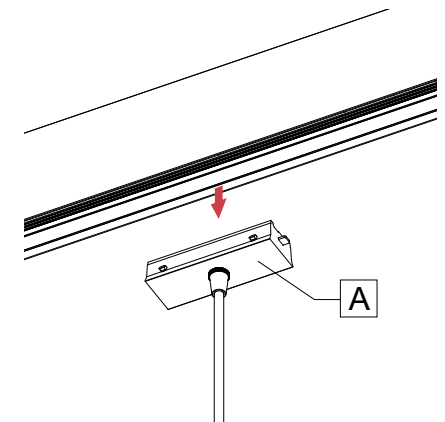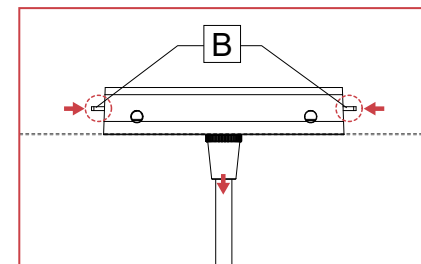

# PIVOT

## Track - Recessed [PIVR] Grid Ceiling



## Installation Instructions


### MODULE - S-LOCK

#### 1 INSTALLATION.

**NOTE:** Hold the module all the times.

Insert one end of adapter [A] into the track.




Turn the slotted screw counterclockwise with flat head screwdriver [B].

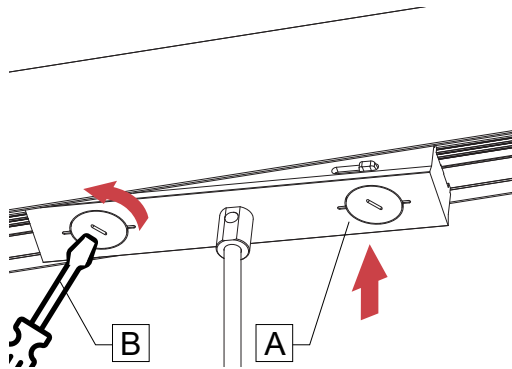

Insert the other end of the adapter [A] until it is flush with the track. It must not extend past the track. Turn the slotted screw counterclockwise with flat head screwdriver [B].

Make sure module is properly installed by gently pulling down on the module.


**WARNING:** Improper installation may result in the module falling down.

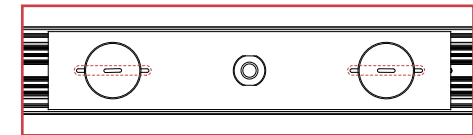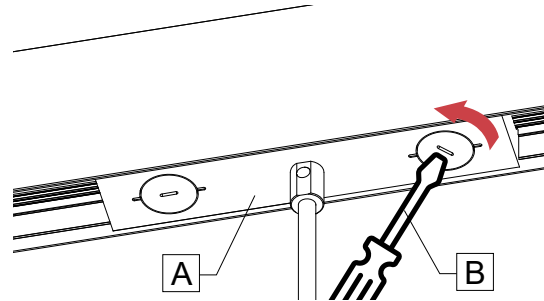


#### 2 REMOVAL.

**NOTE:** Hold the module all the times.


Remove one end of adapter [A] by turning the slotted screw clockwise with flat head screwdriver [B].

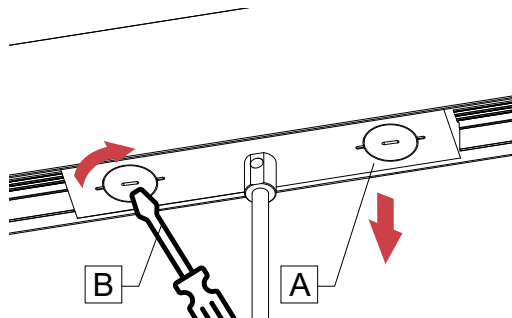

Remove the other end of adapter [A] by turning the slotted screw clockwise with flat head screwdriver [B].

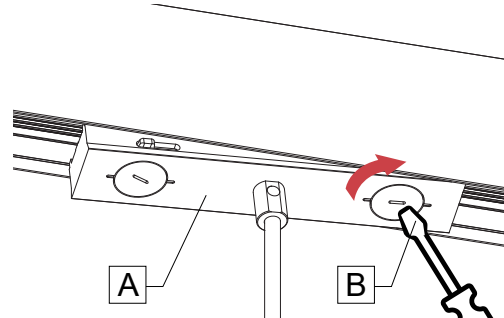

Pull the module [C] out.

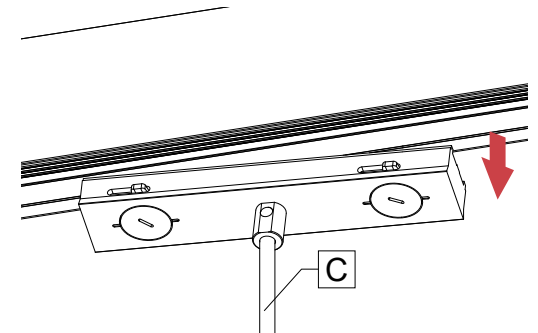

# PIVOT

## Track - Recessed [PIVR] Grid Ceiling




## Installation Instructions

### MODULE - BLANK

#### FACTORY-CUT

##### 1 INSTALLATION.


Insert the blank [A] into the track [B].

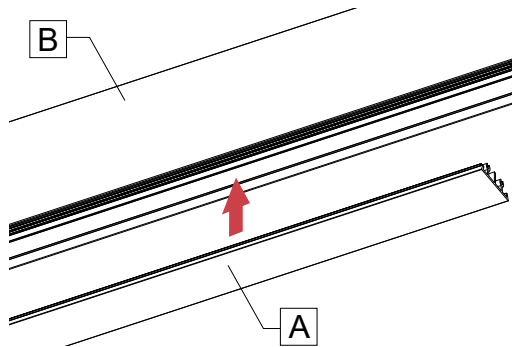

##### 2 REMOVAL.

Pull the blank [A] out.


**NOTE:** Hold the blank to prevent it from falling.

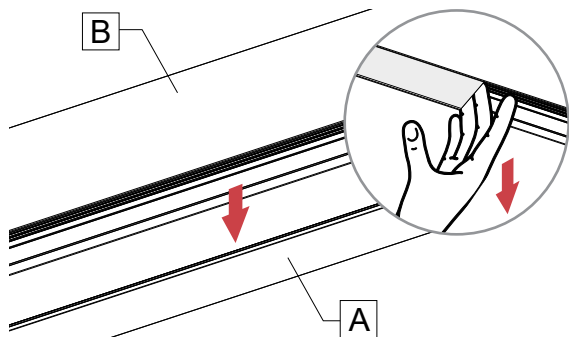

#### FIELD-CUT


##### 1 CUT BLANK.

Cut the blank [A] to the desired length and make a notch (3/8"x3/8") with a cutting tool.

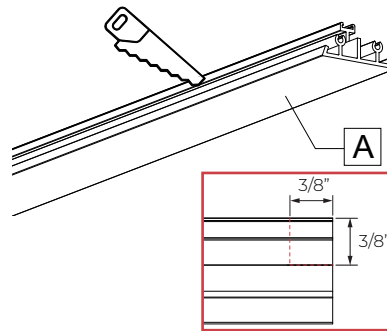

Slide the magnet(s) [C] into the blank [A], and space them out evenly. Secure the magnet(s) [C] with pliers [D].


**NOTE:** The number of magnets will vary. See the table for details.

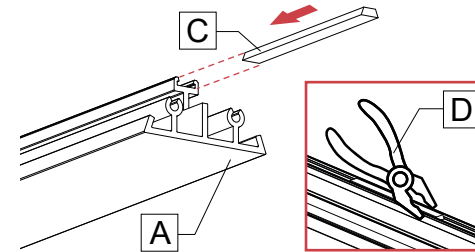

Blank Length	Number of Magnets
up to 8"	1
8" - 24"	2
24" - 36"	3
36" - 48"	4
48" - 60"	5
60" - 72"	6
72" - 84"	7
84" - 96"	8

##### 2 INSTALLATION.

Insert the blank [A] into the track [B].

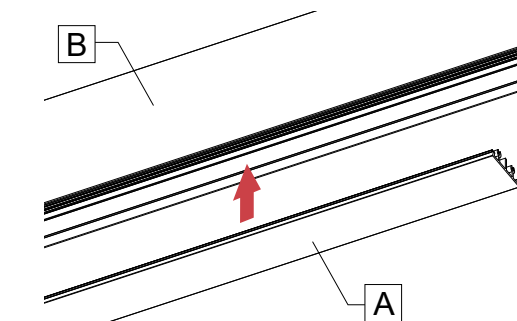

##### 3 REMOVAL.

Pull the blank [A] out.

**NOTE:** Hold the blank to prevent it from falling.

