

Lumenwerx

Livv Downlights

DOWNLIGHT ESSENTIALS.
ARCHITECTURAL FORM.
BUILT FOR SCALE.



Livv Collection

Two Configurations
to Fit Any Spec.

1

Livv
The Essentials

2

Livv Plus
The Extras



APERTURE 3.5"



APERTURE 2.5"

Livv and Livv Plus share the same architectural look below the ceiling, with two engineered options tailored to different application needs.

Livv features a driver-on-board design (LivvCore™) for ease of installation and enhanced value, while Livv Plus offers an integral or remote driver to support advanced features such as tunable white and expanded control options.

APERTURES

2.5" and 3.5"

Round
Architectural
Trims

DISTRIBUTIONS

Fixed
Adjustable
Wall Wash

APPLICATIONS

New Construction
& Remodel


HIGH PERFORMANCE

95+ CRI
Up to 133 lm/W
Low Glare

Easy
Installation



Declare

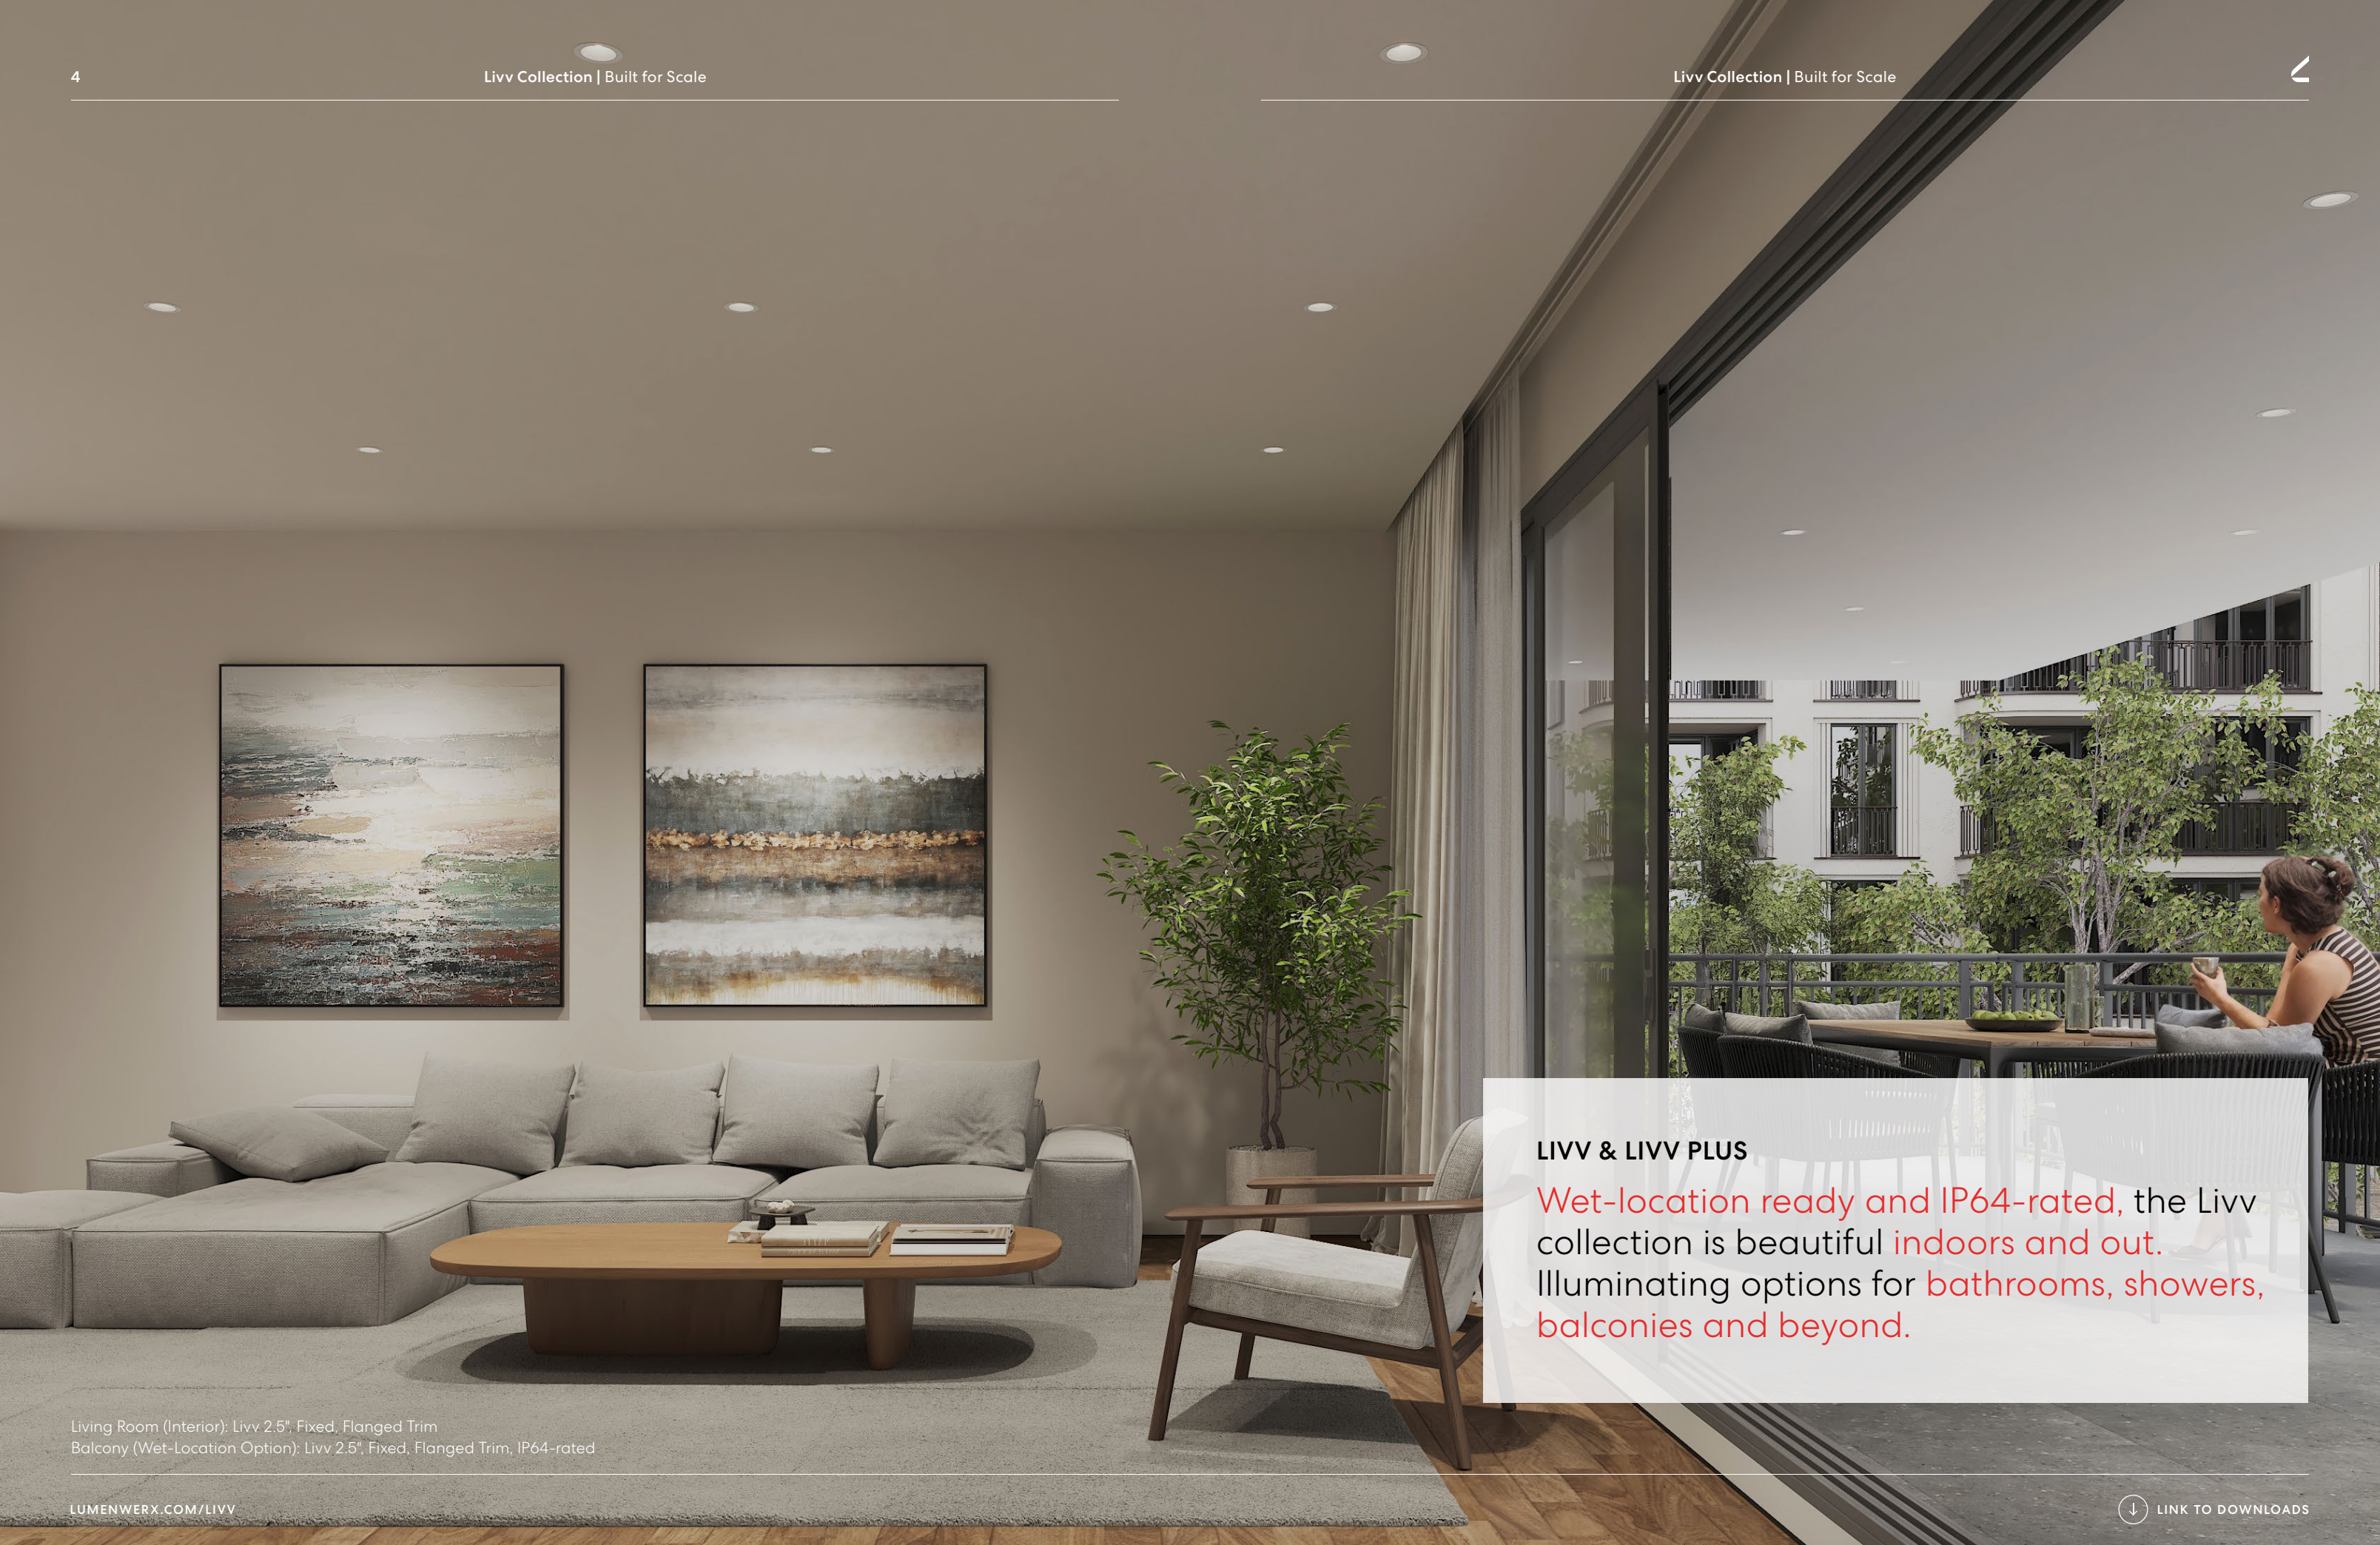

LIVV & LIVV PLUS

Wet-location ready and IP64-rated, the Livv collection is beautiful indoors and out. Illuminating options for bathrooms, showers, balconies and beyond.

Living Room (Interior): Livv 2.5", Fixed, Flanged Trim
Balcony (Wet-Location Option): Livv 2.5", Fixed, Flanged Trim, IP64-rated



One Architectural Look.

LIVV & LIVV PLUS



TRIMLESS



FLANGED TRIM



DROP TRIM

The Livv Collection brings architectural-grade design to cost-conscious project — delivering clean, minimalist aesthetics without compromise. Available in 2.5" and 3.5" apertures, Livv offers a refined ceiling appearance suited for commercial, educational, residential, and institutional spaces.

APERTURE SIZES

2.5"
3.5"

DISTRIBUTION OPTIONS

Fixed
Adjustable
Wall Wash

TRIMS STYLES

Trimless
Flanged Trim
Drop Trim

BEAM ANGLES

15°, 35°, 50°
60°, 70°

TRIM SHAPE

○ Round

TRIM FINISHES

○ Matte White
● Matte Black

ENVIRONMENTAL PROTECTION

Wet Location
IP64



FIXED



ADJUSTABLE



WALL WASH



Efficient by Design.

BUILT FOR SCALE

UP TO

133 lm/W

LOW GLARE

UGR < 10

COLOR QUALITY

95+ CRI_(2-step)

L90 at
50 000 hours



Featured Products:
Livv 3.5", Fixed Flanged Trim



Two Configurations.

LIVV & LIVV PLUS

Livv - The Essentials

STREAMLINE SPECS

USE LIVV FOR BUDGET-CONSCIOUS PROJECTS, CONTRACTOR-FRIENDLY FEATURES, AND SIMPLIFIED SPECIFICATION.

COLOR TEMPERATURES

- 2700K
- 3000K
- 3500K
- Dim to Warm (Solo)

DIMMING

1% 0-10V
TRIAC 120V

VOLTAGE

120V

WATTAGE

Livv 2.5: 5 W, 8 W, 12 W
Livv 3.5: 7 W, 10 W, 14 W

1- Livv
Driver-on-Board
LivvCore™



2- Livv Plus
Integral Driver
& Remote Driver



Livv Plus - The Extras

EXPANDED OPTIONS

CHOOSE LIVV PLUS WHERE CONTROL, MOOD, AND FLEXIBILITY MATTER — WITHOUT ALTERING THE CEILING AESTHETIC.

COLOR TEMPERATURES

- 1800K
- 2200K
- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- Dim to Warm (Solo)
- Tunable White (Duo)
- Custom

DIMMING

1% 0-10V
0.1% 0-10V
TRIAC 120V
ELV 120V
DMX
DALI

Lutron Hi-Lume 1%
Lutron Hi-lume Premier 0.1%
eldoLED 0.1% SoloDrive 0-10V
eldoLED 1% EcoDrive 0-10V
0-10V Emergency Battery

VOLTAGE

120V
277V

UNV
347V

WATTAGE

Livv Plus 2.5: 5 W, 8 W, 12 W
Livv Plus 3.5: 7 W, 10 W, 14 W
& Custom Wattage



Applications:

Residential Commercial Educational Retail & Hospitality Wet Locations



Featured Products:
Livv 3.5", Fixed, Trimless
Livv 3.5", Wall Wash, Trimless



Featured Products:
Livv 3.5", Adjustable & Fixed, Trimless



Featured Products:
Livv 3.5", Fixed, Flanged Trim, Wet Location



Featured Products:
Livv 2.5", Fixed, Flanged Trim



Fast Installs. Easy Service.

Built for IC and Non-IC applications, both Livv and Livv Plus are airtight, concrete-pour rated, and CCEA (Chicago Plenum) compliant. Available in new construction and remodel housings.

MINIMUM PLENUM HEIGHT

4"

INSTALLATION OPTIONS

Open Frame
Insulated Ceiling
Remodel
Chicago Plenum (CCEA)
Airtight
Pre-mount Plate
Concrete Pour



Concrete Pour Option

CEILING TYPES

Drywall, Acoustic Tile,
Concrete, Wood,
Grid Systems & More




Remodel Option

Plug-and-Play Quick Connect Design

Livv and Livv Plus are designed for fast, contractor-friendly installation, featuring a quick-connect system and below-ceiling access for simplified maintenance.



UP TO
30° TILT

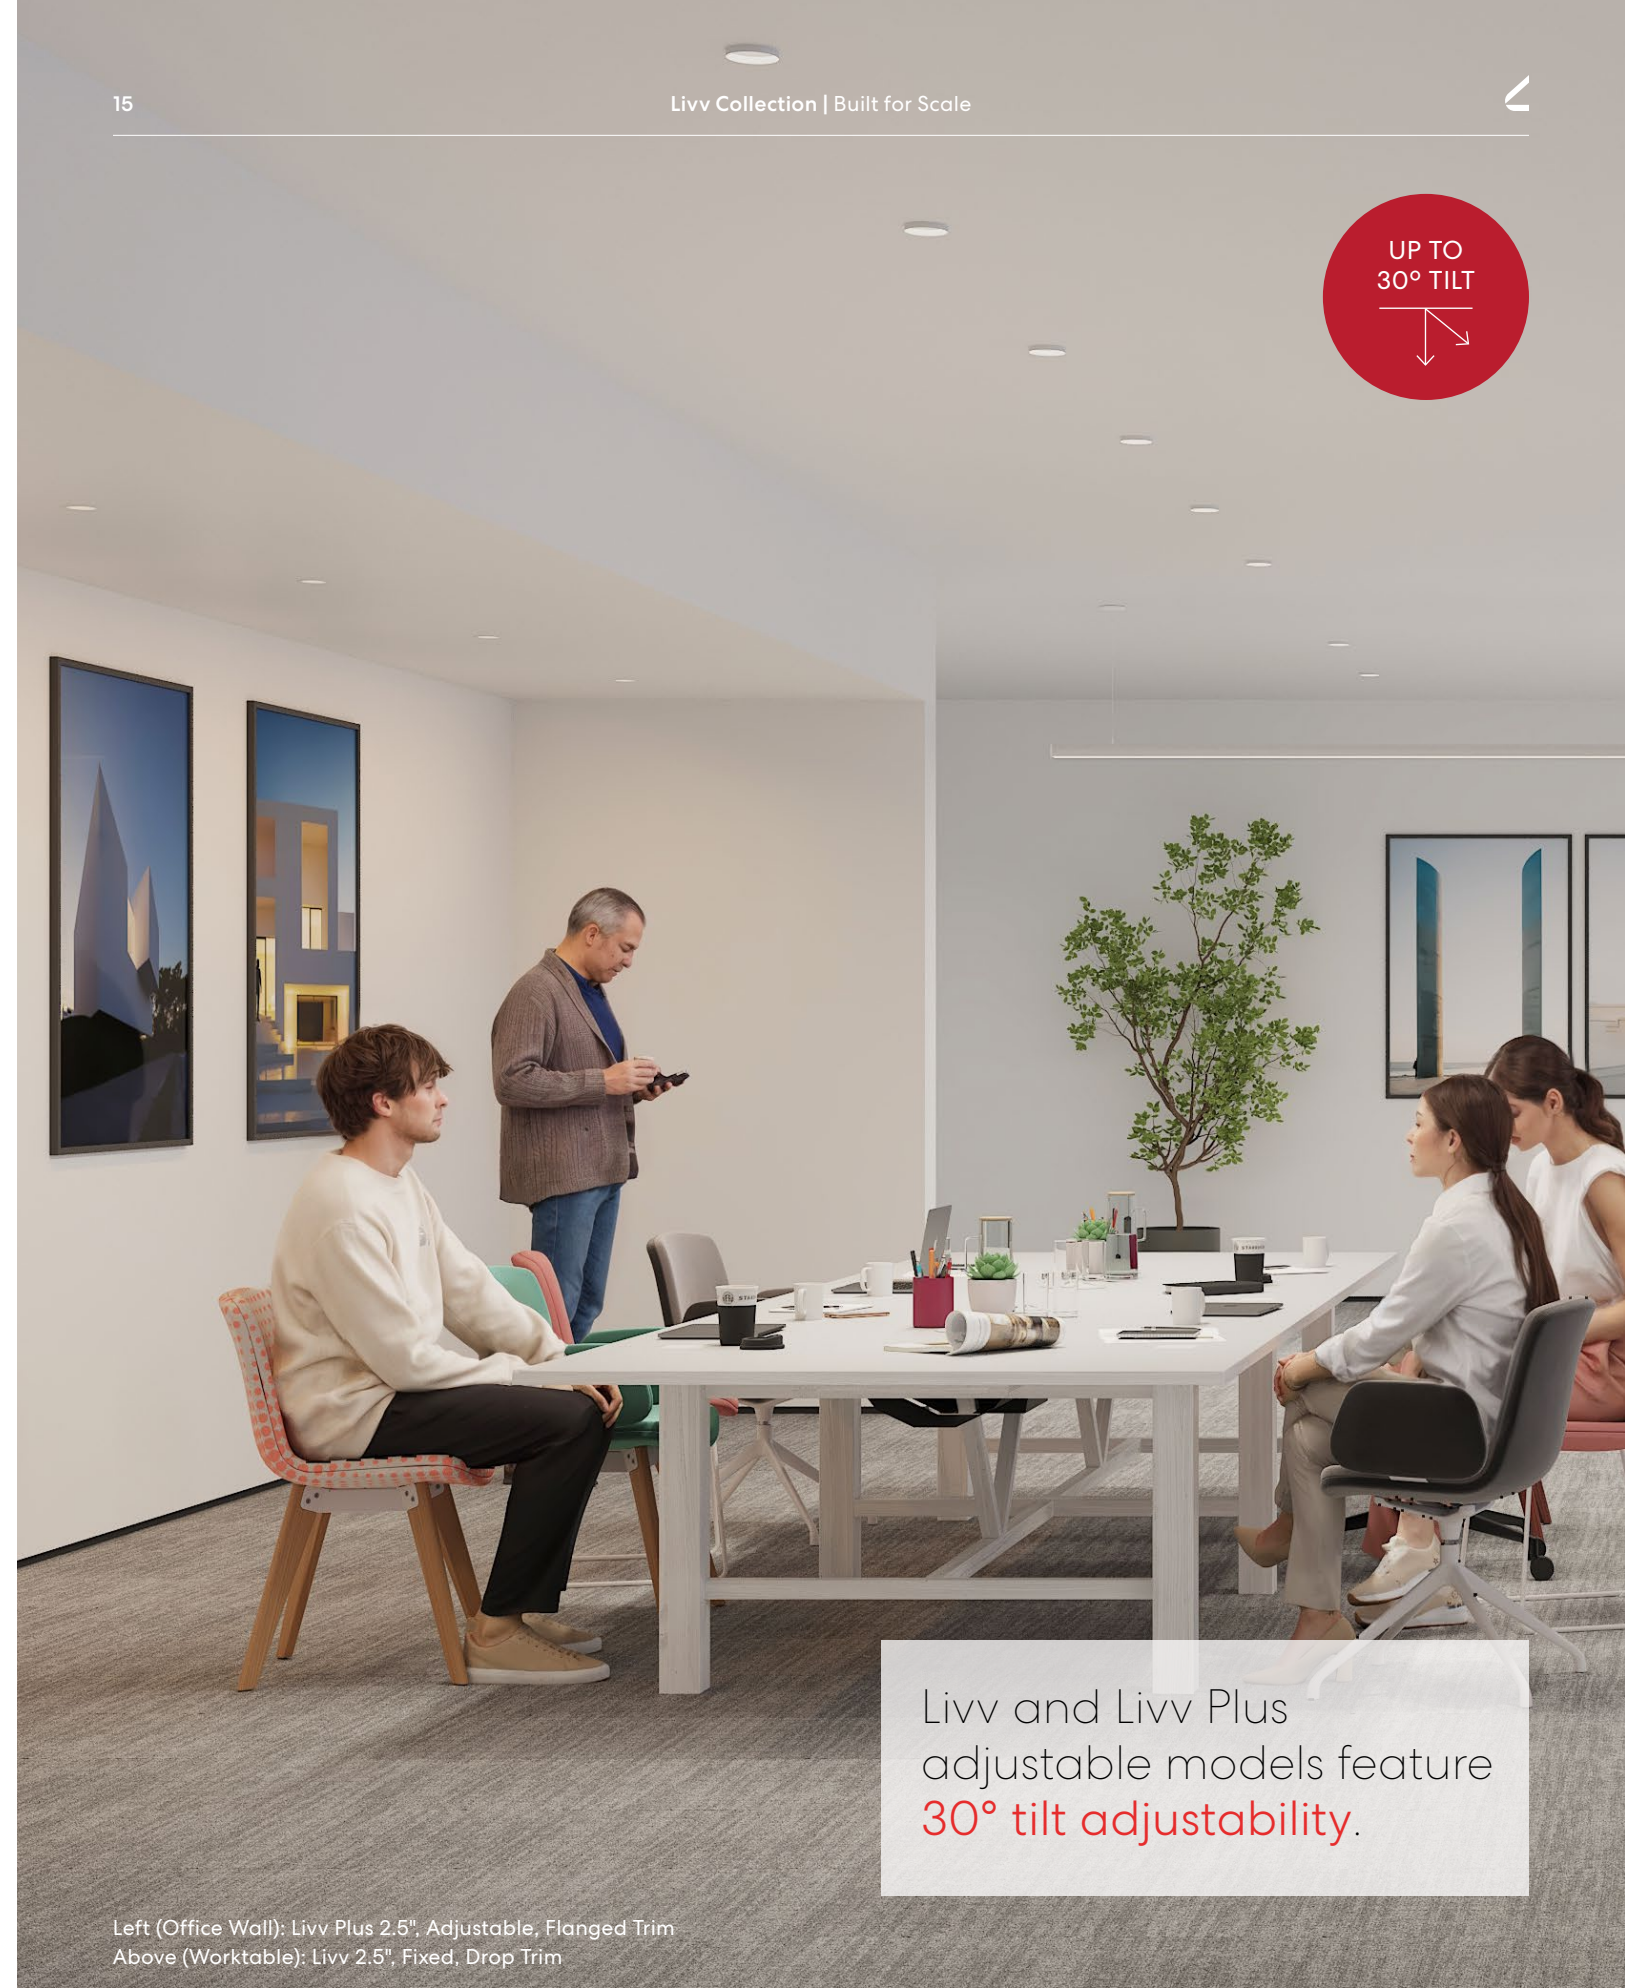

Livv and Livv Plus adjustable models feature **30° tilt adjustability.**

Left (Office Wall): Livv Plus 2.5", Adjustable, Flanged Trim
Above (Worktable): Livv 2.5", Fixed, Drop Trim

From Essential to Signature

Lumenwerx Downlight Collections



ESSENTIAL ARCHITECTURAL



ESSENTIAL ARCHITECTURAL + EXTRAS



PERFORMANCE & VERSATILITY



PERMIUM SIGNATURE FEATURES




THE SPECIALIST

	LIVV LIVV PLUS	LIVV PLUS LIVV	ECANA	AERA AERA SHALLOW AERA DEEP	VOILA VOILA SEAL VOILA SEAL MRI
FEATURES	The Essentials: Architectural form, smart performance and optimized for cost-conscious projects. IP64 rated.	The Extras: Expanded options and advanced control. IP64 rated. Same architectural form as Livv.	Versatile, high-performance design with a powerful output. Built for balance and flexibility.	A complete family with feature-rich design, precision optics, premium control, and signature architectural details.	Engineered for demanding spaces. Designed for healthcare applications.
APERTURE SIZE	2.5" / 3.5"	2.5" / 3.5"	3" / 4" / 6"	2" / 3" / 4"	2" / 4"
SHAPE	 Round	 Round	 Round  Square	 Round  Square	 Round  Square
DISTRIBUTION	 Fixed  Adjustable  Wall Wash	 Fixed  Adjustable  Wall Wash	 Fixed  Adjustable  Wall Wash	 Fixed  Adjustable  Wall Wash	 Fixed  Adjustable  Wall Wash
MAX. DELIVERED LUMENS BY SIZE (AT 3500K)	1300lm / 1700lm	1300lm / 1700lm	2100 / 2900 / 4700 lm	950 / 2100 / 2800 lm	1350 / 2800 lm
APPLICATION	New construction Remodel	New construction Remodel	New construction Remodel	New construction Remodel	New construction
HOUSING TYPE	Type-IC Open Frame Type Non-IC Chicago Plenum Airtight Concrete Pour	Type-IC Open Frame Type Non-IC Chicago Plenum Airtight Concrete Pour	Type-IC Open Frame Type Non-IC Chicago Plenum Airtight	Type-IC Open Frame Type Non-IC Chicago Plenum Airtight	Type-IC Type Non-IC Chicago Plenum
PLENUM CLEARANCE BY SIZE	As low as: 4"	As low as: 4"	As low as: 4" / 4 1/8" / 6"	As low as: 3 3/8" / 2 5/8" / 4"	As low as: 4"
OTHER AVAILABLE CONFIGURATIONS	Wet Location - IP64	Wet Location - IP64	Damp Location	Damp Location Cylinder, Cuboid, Flex, Inflex, Multi-aperture	Wet Location — IP64 Cylinder, Cuboid, MRI Construction
CERTIFICATIONS	  	  		  	



LIVV COLLECTION
BROCHURE



LIVV COLLECTION
ONLINE

 **Lumenwerx**

ALWAYS LIGHT
RIGHT

lumenwerx.com