


CAVA - RECESSED



Cava recessed

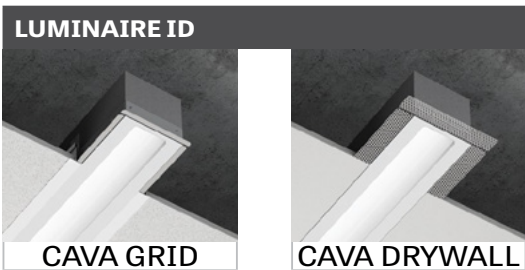

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST & Drywall
FINISH	White
CONTROLS	Individual Daylight
OPTIONS	Fuse, Flexible Whip Cable, Chicago Plenum

The following options may require additional lead time: 347V, Group Controls & ChromaWerx.