


POP RECESSED SQUARE

LED BOARD REPLACEMENT - INSTRUCTION


NOTE: Wire dimming conductors as Class 1

1 FLUSH

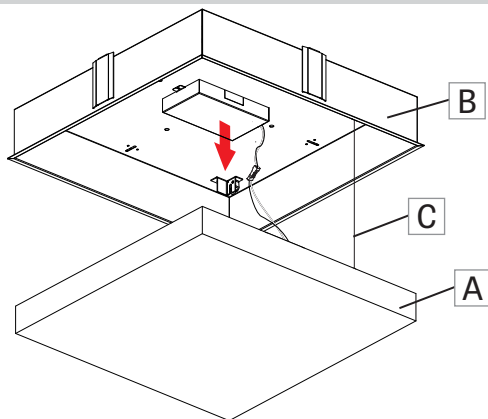


Make sure the power to the fixture is turned off. Push slowly the diffuser (A) until it is unlocked. Lower the diffuser (A) from the housing (B) retained by security cable (C).

2

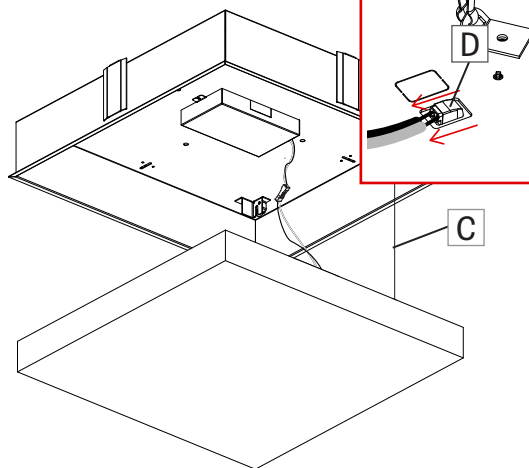


Disconnect wires from molex connector (D) (on LED plate holder) and remove security cable (C).

3

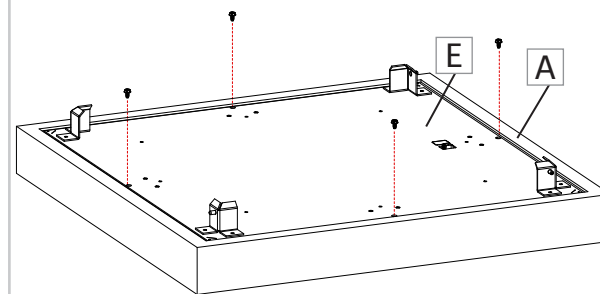


Unscrew the diffuser (A) to separate it from the LED plate (E).

4

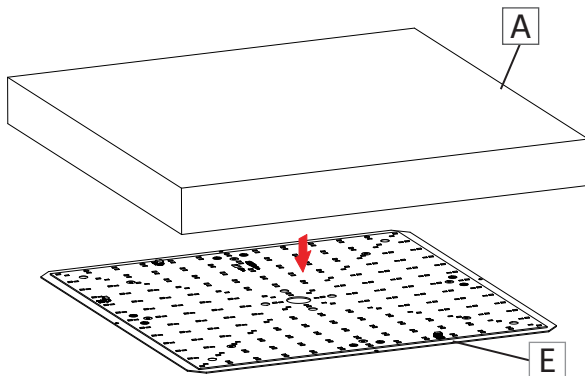


Separate LED plate (E) from the diffuser (A).

5

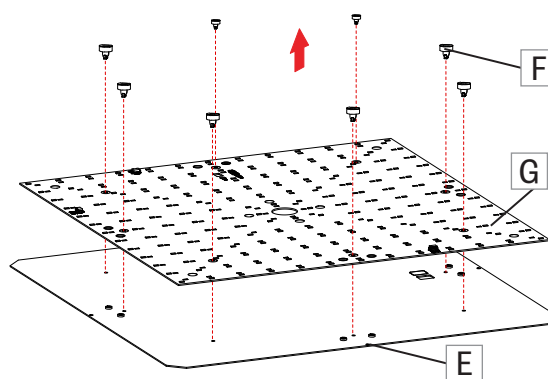

Remove push pins (F) on the LED board (G) to separate it from the LED plate (E).

6

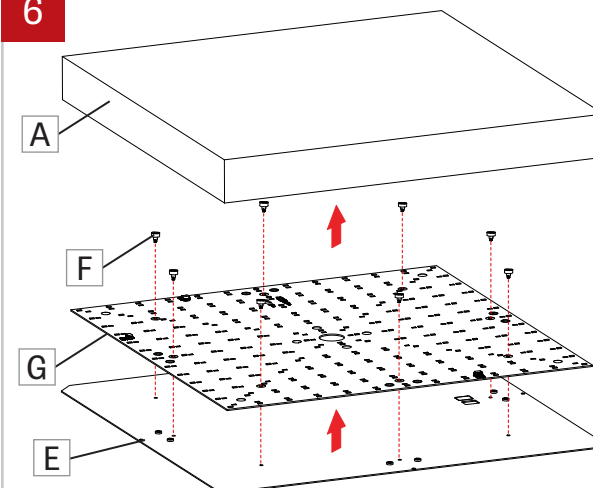


Replace LED board (G) and reinstall it on the LED plate (E). Secure it by putting back provided push pins (F). Place LEDs on the diffuser (A).

POP RECESSED SQUARE


LED BOARD REPLACEMENT - INSTRUCTION

7

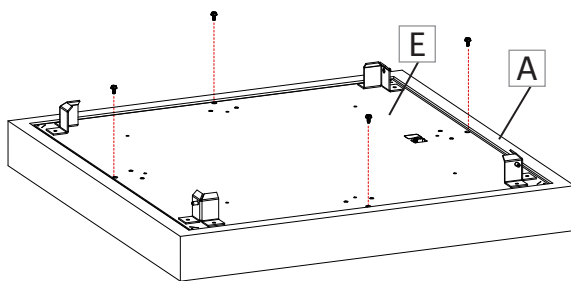


Screw back the LED plate (E) on the diffuser (A).

8

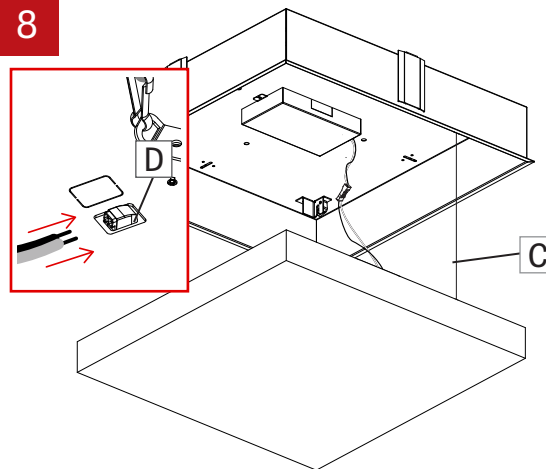

Reinstall security cable (C). Reconnect the wires from the driver to the molex connector (D).

9

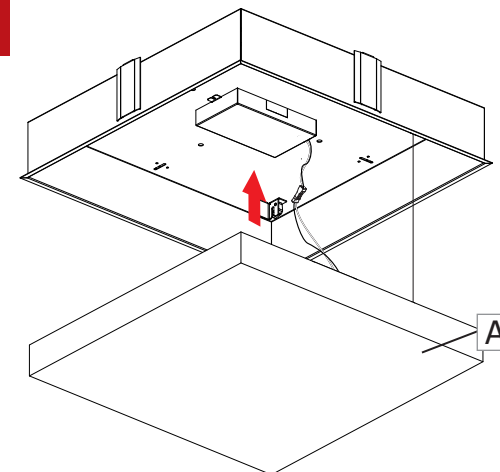

Carrefuly push back in place the diffuser (A) after aligning the brackets.