



**IMPORTANT:** Installation instructions are shown with Quad Narrow and applies to all Quad sizes

**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

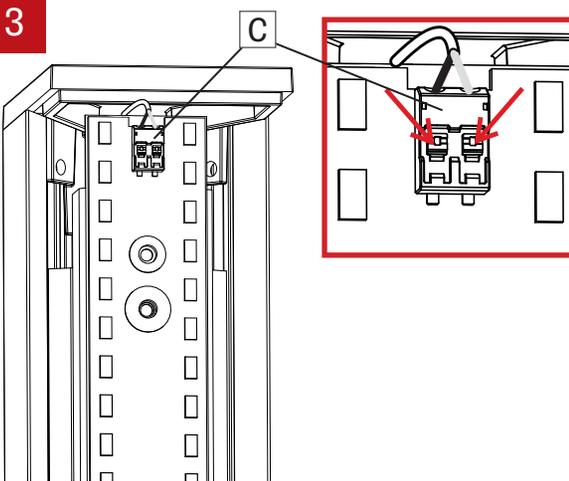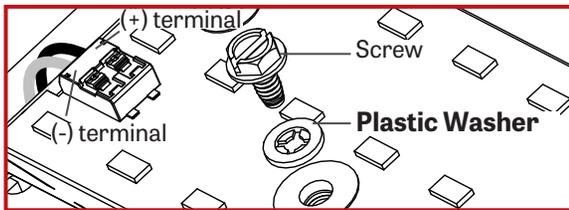


Disconnect LED molex connector (C) by taking a pointed object and pressing on the two tabs on the top.

### 1 SINGLE FIXTURE

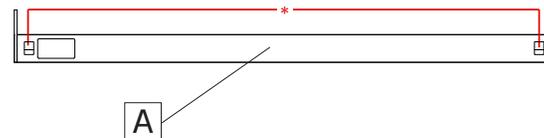


Make sure the power to the fixture (A) is turned off. Mounting points [\*] on the fixture according to the client drawings.

### 2

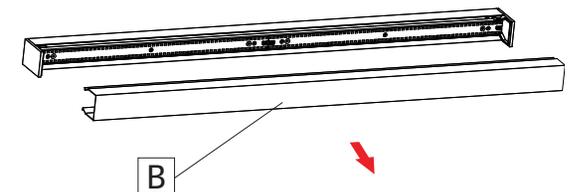


Remove lens (B).

### 4

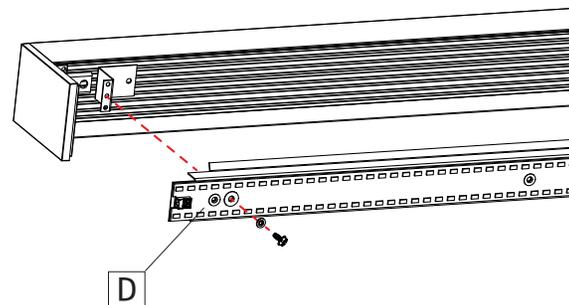

Unscrew the cartridge (D) and remove it from the fixture. Place the cartridge in a safe place.

### 5

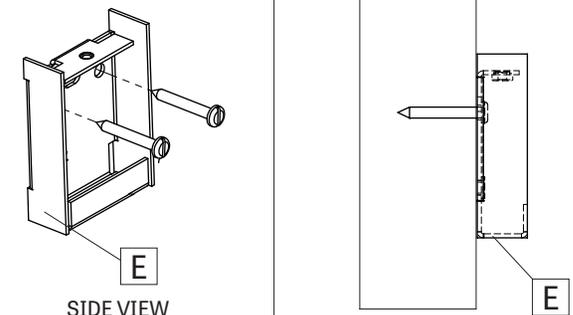

Locate wall bracket position using provided client drawing. Install mounting brackets (E) to wall. Align with structural stud or use drywall anchors when needed.

**6**

Make wire connection between fixture (A) and wall power cable.

**7**

Insert fixture bracket (F) into wall bracket (E), and secure in place with supplied screws (G).

**8**

Reconnect LED mox connector (C) to the cartridge (D). Reinstall the cartridge (D) by **using screws and plastic washers. Do not apply too much pressure.**

**9**


Reinstall the lens (B) back.

**10** CONTINUOUS SYSTEM


For a continuous system, locate wall bracket position using provided client drawing. Install mounting brackets (E) to wall. Align with structural stud or use drywall anchors when needed.

**11**


For a continuous system, remove lens (B) from all fixtures in the run.

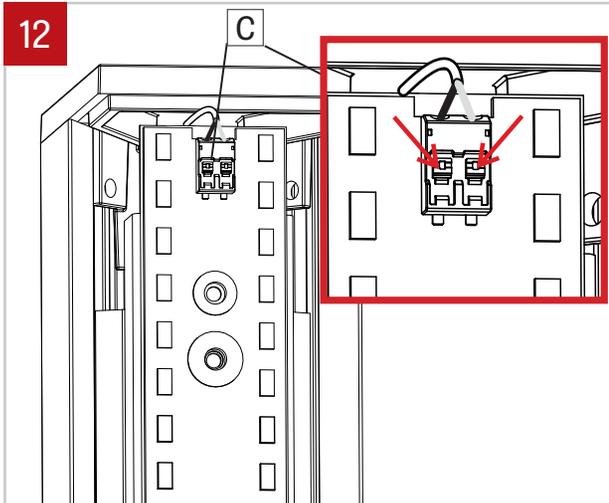


12 Disconnect LED molex connector (C) by taking a pointed object and pressing on the two tabs on the top.

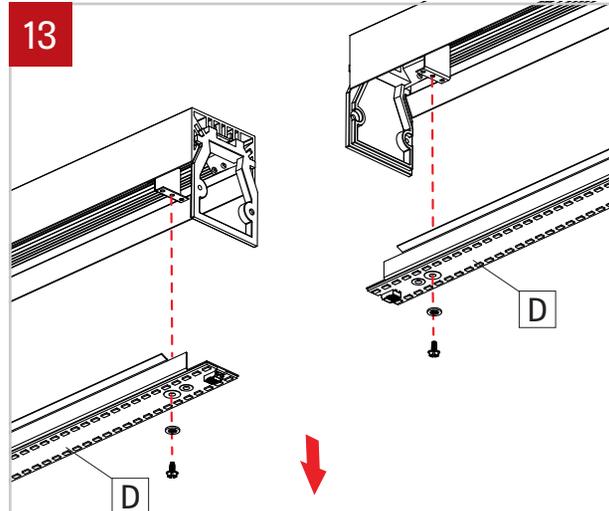


13 Unscrew the cartridges (D) and remove them from all fixtures. Place the cartridges in a safe place.

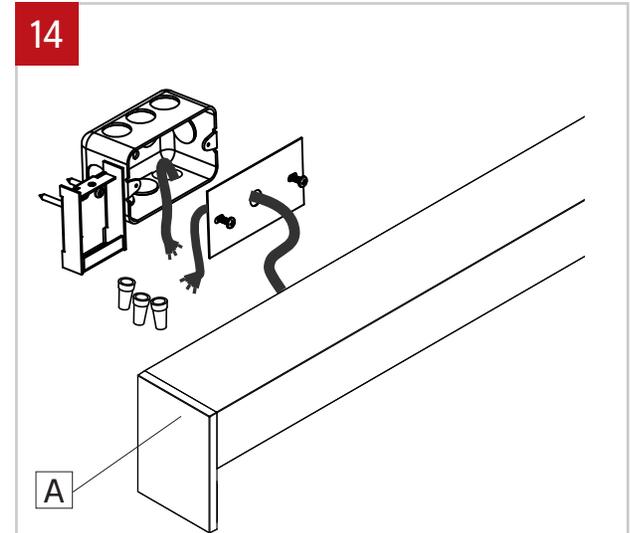


14 Make wire connection between fixture (A) and wall power cable.

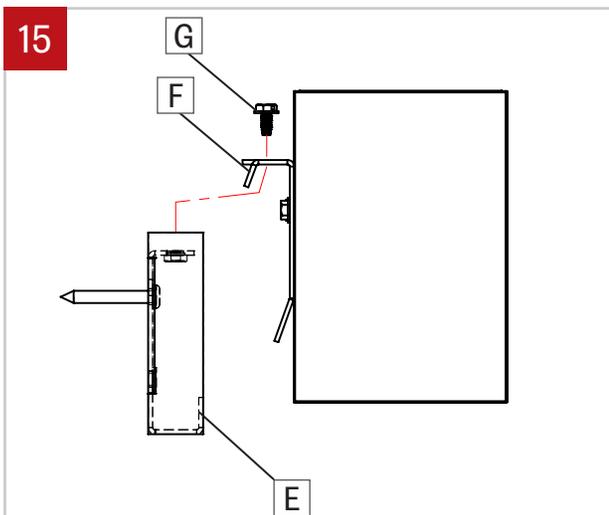

15 Insert the first fixture bracket (F) into wall bracket (E) and secure in place with supplied screws (G).

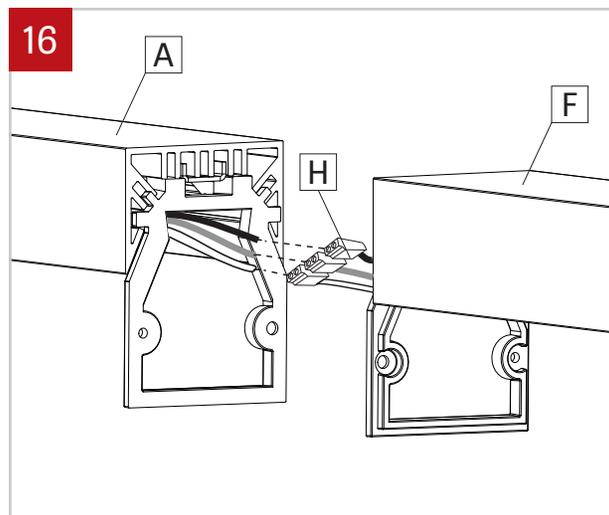

16 Connect wires between joining fixtures (A) and (F) using quick connectors (H).

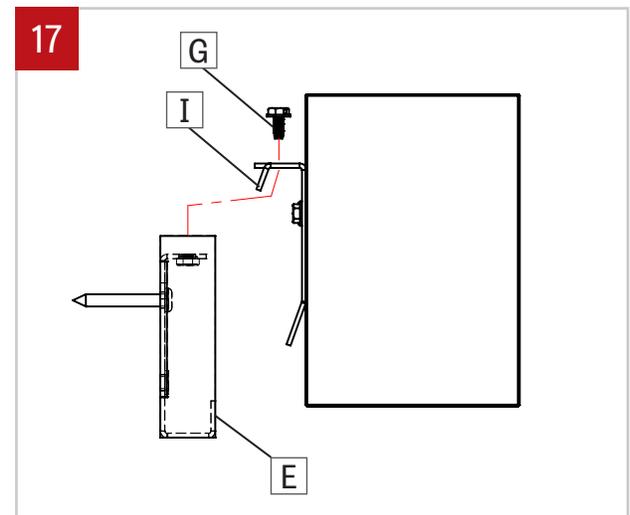

17 Insert the second fixture bracket (I) into wall bracket (E) and secure in place with supplied screws (G).

