

SHALO ULTRA 1.5

Surface - Magnet



 This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.


Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

 Wire dimming conductors as Class 1.

 For electrical connections, please refer to the [wiring diagram guide](#).



 For remote driver box, please refer to the [remote driver installation sheet](#) for more information.




SINGLE FIXTURE


1 PREPARE THE INSTALLATION AREA.

Caution: Make sure the electrical power is turned off.

Prepare the area where the fixture [A] is going to be installed according to the dimensions [1] in the client drawings.




The power wire is located 13/16" from the end and 5/8" from the center.

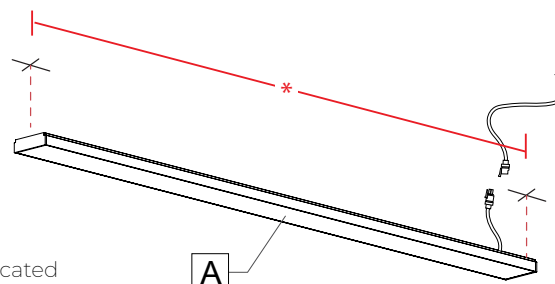

2 INSTALL A FERROUS STRUCTURE.


Install a ferrous structure [B] on the mounting points on the ceiling.



3 MAKE ELECTRICAL CONNECTION.

Connect the main AC power cable to the remote driver box. Then, connect the remote driver box DC cable [C] to the fixture using the provided wire harness [D].


Note: A jumper cable (by others) might be necessary between the remote driver box and the fixture.

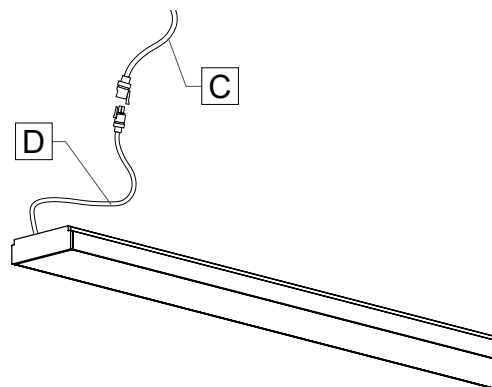

For remote driver box, please refer to the [remote driver installation sheet](#) for more information.

4 FIX THE FIXTURE TO THE CEILING.

Position the fixture [A] close to the ceiling to secure the magnets [E] to the ferrous structure [B].

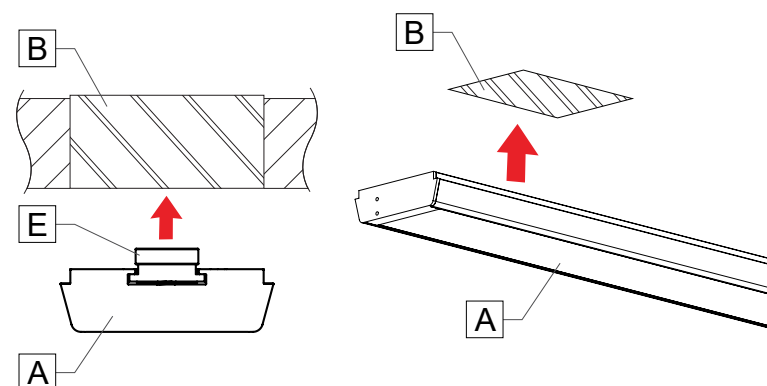

SHALO ULTRA 1.5

Surface - Magnet




CONTINUOUS RUN

1 FOLLOW STEP **1** TO **2** FROM THE SINGLE UNIT SECTION FOR THE ALL FIXTURES IN THE RUN.

2 JOIN THE FIXTURES.


Join the fixtures **[A]**, insert the joiner **[F]** from one fixture to the second one, pull the fixtures together.

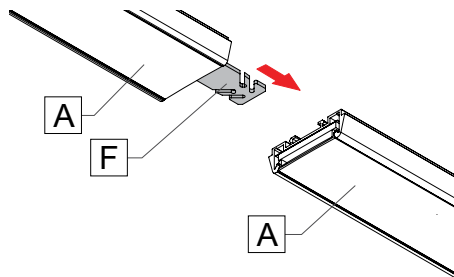

3 MAKE ELECTRICAL CONNECTIONS.

Connect the main **AC** power cable to the remote driver box. Then, connect the remote driver box **DC** cable **[C]** to each fixture using the provided wire harness **[D]**.



Note: A jumper cable (by others) might be necessary between the remote driver box and the fixture.

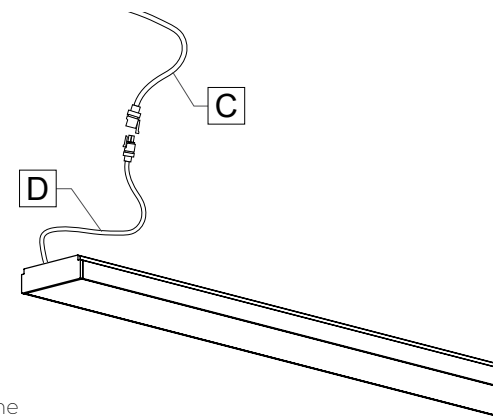

For remote driver box, please refer to the [remote driver installation sheet](#) for more information.

4 FIX THE FIXTURES TO THE CEILING.

Position the fixture **[A]** close to the ceiling to secure the magnets **[E]** to the ferrous structure **[B]**.

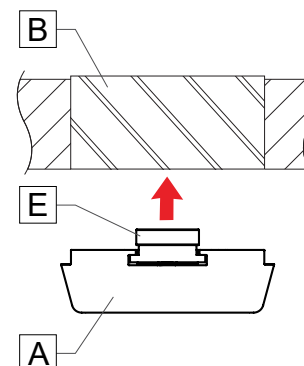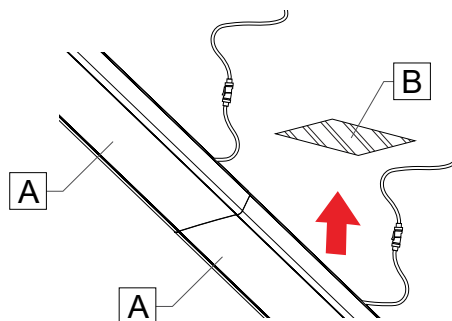

5 REPEAT STEPS **2** TO **4** FOR ALL FIXTURES IN THE RUN.