



Evoq Slim

THE OPTICAL CONTROL OF EVOQ,
IN A SHALLOWER PROFILE.



Miniwerx
SERIES



Specify Evoq Slim in Three Steps


THE EVOQ SLIM SYSTEM



Evoq Slim

1

SPECIFY YOUR
FIXTURE

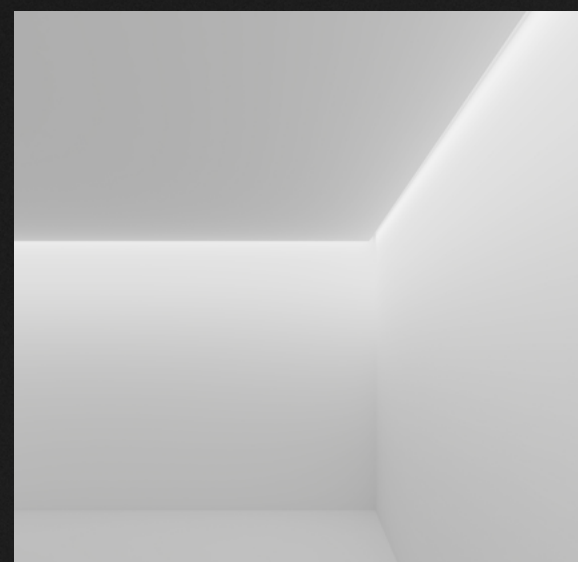

2

DEFINE YOUR
CONFIGURATION

- Available Depth
& Cove Dimension
- Linear Run or Pattern



3

SELECT YOUR
MOUNTING

- Ramp Profiles
- Use Pre-existing Cove

Declare




EcoSystem
Enabled



Miniwerx
SERIES



0.75"
HEIGHT

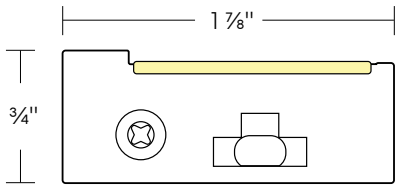

Section View

Evoq Slim

THE OPTICAL CONTROL OF EVOQ, IN A SHALLOWER PROFILE.

Evoq Slim brings the optical control and performance of Evoq into a shallower ¾" profile. With four precision optics, output up to 1000 lm/ft, and a remote driver, it extends the collection into compact cove conditions with high-output capability and broad optical flexibility.



Mud-in Ramp
KE1: Knife Edge 35° Ramp

FIXTURE DIMENSIONS

1 7/8" W × ¾" H

4 PRECISION OPTICS

Asymmetric Optics
Narrow & Wide

Symmetric Optics
Narrow & Wide

OUTPUT

350 to
1000 lm/ft

3 MOUNTING OPTIONS

Flat Edge
Mud-in Ramps

Knife Edge 35°
Mud-in Ramps

Standalone Fixture

6" Length Increments
up to 8'

Remote Driver

Featured Product
Evoq Slim, Patterns, Inside Corners
Mud-in Ramp
FE1: Flat Edge Ramp

Linear Runs
& Patterns

Inside & Outside
Corners

Static White
Dim to Warm (Sola)
Tunable White (Duo)




Optics


EVOQ SLIM

Impressive
Ceiling
Uniformity

Precision-
Engineered
Optic Design

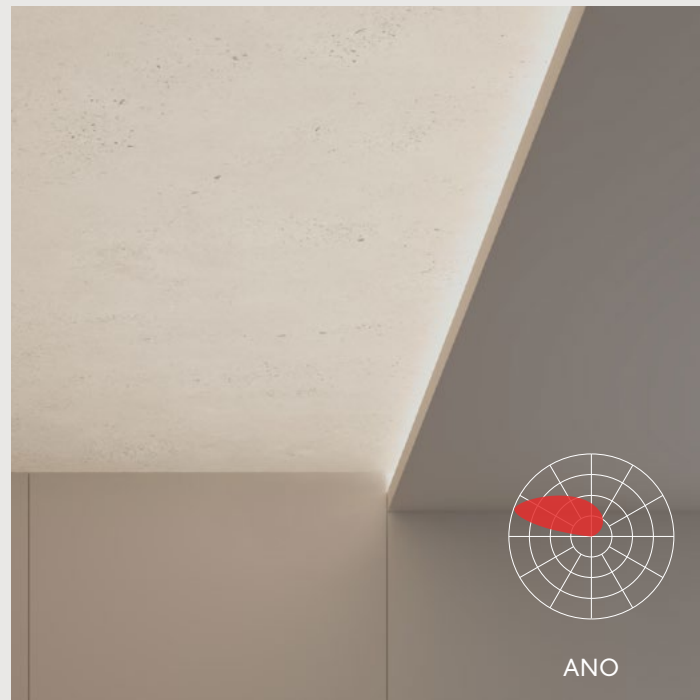

ANO

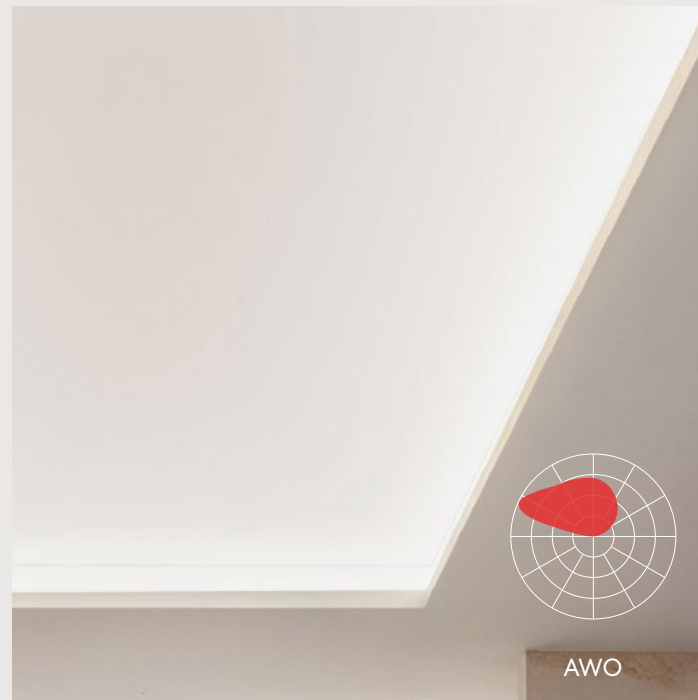

AWO

Asymmetric Narrow Optic


Our Asymmetric Narrow Optic (ANO) is designed specifically for shallow coves with optimal performance achieved with fixture placement at 6"-12" from the ceiling. Its precise projection of light along ceilings and walls is evenly distributed with a soft, homogeneous gradient effect. The ANO peak intensity angle from nadir is at 110°, making it a true asymmetric optic that directs the light where it is intended.

Asymmetric Wide Optic


The Asymmetric Wide Optic (AWO) excels at maximizing light projection even farther to create a soft gradient illumination with remarkable uniformity in deeper coves. The AWO's optimal performance is achieved with fixture placement at 10"-36" from the ceiling. Its peak intensity angle from nadir is at 107°, creating a true asymmetric optic that aims light exactly where needed.



Four precision optics give Evoq Slim the flexibility to shape light. Choose asymmetric distributions for directional performance, or symmetric optics for balanced, uniform ceiling illumination.

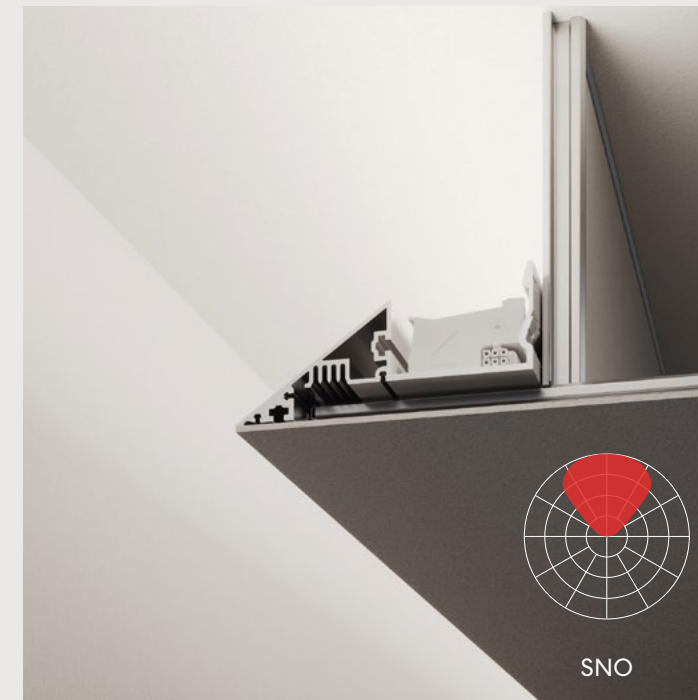

SNO

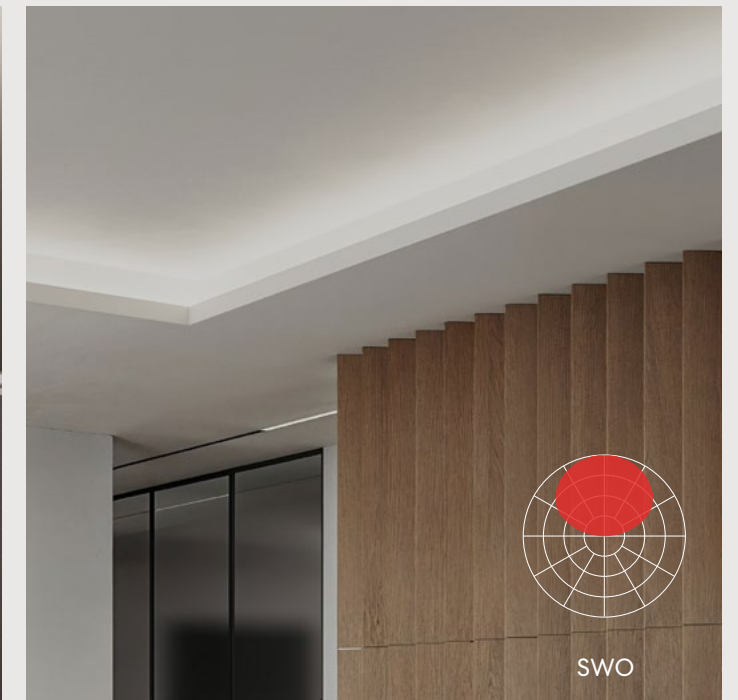

SWO

Symmetric Narrow Optic

Engineered for pure indirect performance, the Symmetric Narrow Optic (SNO) delivers a 98° beam that blankets ceilings in uniform, comfortable light. Refined through a precision de-glare low profile optic, it can produce luminous ceilings with virtually zero glare.

Symmetric Wide Optic

Designed for flawless indirect illumination, the Symmetric Wide Optic (SWO) delivers a remarkably broad 145° beam that floods ceilings with soft, even light. Powered by a precision acrylic optic with laser-etched diffusion, it emits over 96% of its lumens upward, creating luminous ceilings free from glare or harsh contrast.



Color Temperatures & Static Colors

Choose custom CCT ranges or preset selections to match the color temperature to the space. Tunable white lighting supports visual comfort and functionality, enhancing occupant well-being without compromising on ambiance.

Customizable CCT Options

Custom CCT Ranges

HEALTH & WELL-BEING

High EML/CS Options

COLOR TEMPERATURES

- ☐ 2200K ☐ 2700K ☐ 3000K
☐ 3500K ☐ 4000K ☐ 5000K
☐ 6500K ☐ Static Colors

TUNABLE WHITE (DUO) CUSTOM RANGE SELECTION




DIM TO WARM (SOLA) CUSTOM RANGE SELECTION





Mounting Options

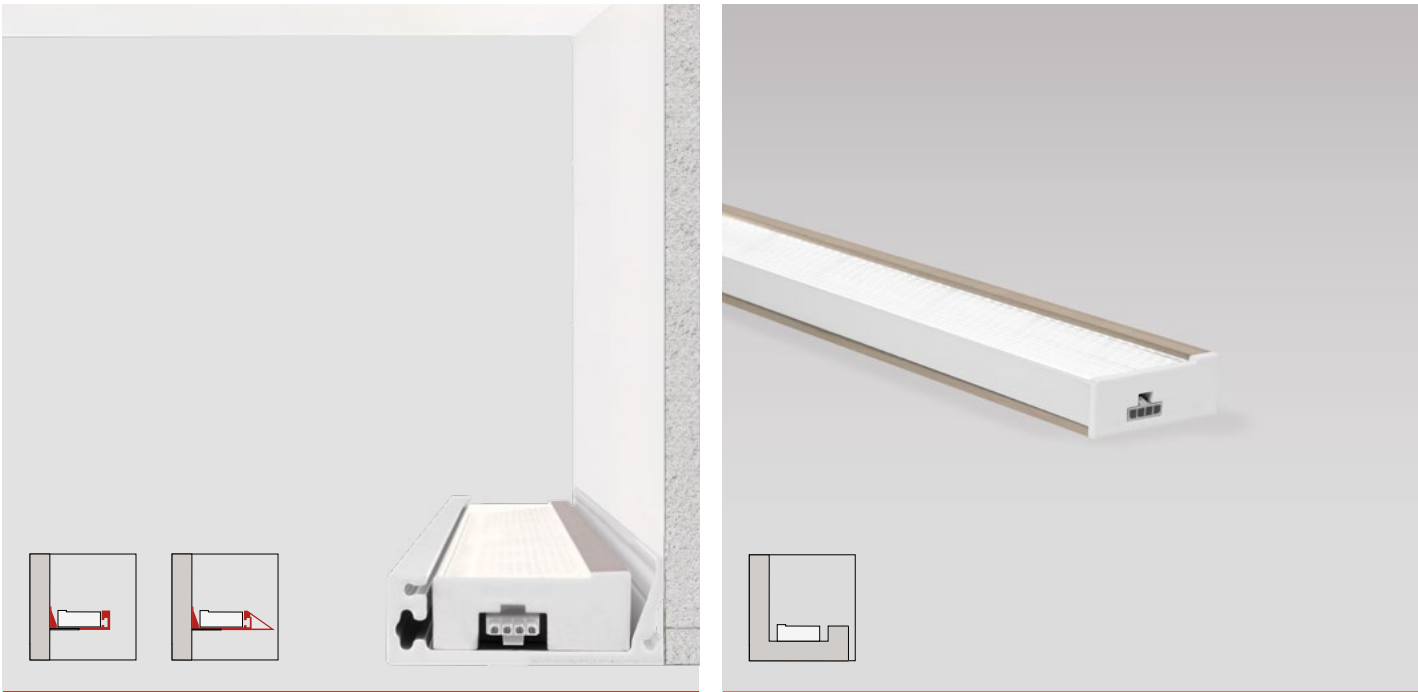

Mud-in Ramps

Evoq Slim Mud-in ramps serve as prebuilt cove structures. They are factory-built and field-cuttable. They require plastering and painting. The ramps come with integrated aligners and pins for an uninterrupted cove finish.

RAMP PROFILES

- **FE1** Flat Edge
- **KE1** Knife Edge 35°

Additional Options

Evoq Slim fixtures can be integrated into existing coves as standalone fixtures.



Configuration & Patterns

STRAIGHT COVES

Linear runs and straight-corner patterns are available for Evoq Slim, including standard shapes and custom configurations.


Simple & Complex Patterns

Inside & Outside Corners


Linear Runs

OUTSIDE CORNERS (Common shape examples)

INSIDE CORNERS (Common shape examples)



Square



U-shape



Square



U-shape



L-shape



Rectangle



L-shape



Rectangle



Cove lighting, scaled to the architecture.

Discover all the Evoq Collection



EVOQ COLLECTION
ONLINE



Three
Models

Plug & Play
Design

Soft & Uniform
Illumination



NEW

Evoq Nano
For the tightest spaces




NEW

Evoq Slim
For shallower coves

Evoq
Maximum design freedom

Lumenwerx Cove Systems at a Glance

Find the Right Cove System for your application.



	EVOQ	EVOQ SLIM	EVOQ NANO	ALCOVE
COVE APPLICATION	Maximum design freedom, including curved and complex cove configurations	Shallow coves requiring optical flexibility and higher-output options	The tightest coves and concealed details where compact size and optical control are critical	Field-aimable cove applications requiring adjustable distribution
OPTICAL & LIGHT PERFORMANCE				
OPTICAL DISTRIBUTIONS	Asymmetric Narrow Optic (ANO) Asymmetric Wide Optic (AWO) Symmetric Narrow Optic (SNO) Symmetric Wide Optic (SWO)	Asymmetric Narrow Optic (ANO) Asymmetric Wide Optic (AWO) Symmetric Narrow Optic (SNO) Symmetric Wide Optic (SWO)	Nano Asymmetric Optic (NAO)	Adjustable Asymmetric Projecting Optic (APO)
FIELD AIMING	Optional Field Adjustment ±30° with WCA, DM3, or ADJ mounting	Fixed	Fixed	Field Adjustable Precise Aiming in 5° Increments Peak Angle Adjustable by up to 60° In-Field
OPTIMAL FIXTURE-TO-CEILING DISTANCE	ANO: 6"–12" SNO: 8"–12" AWO, SWO: 10" to 36"	ANO: 6"–12" SNO: 8"–12" AWO, SWO: 10" to 36"	NAO: 5"–16"	APO: 8" minimum
AVAILABLE OUTPUT PACKAGES	350, 500, 750, 1000, 1200 lm/ft	350, 500, 750, 1000 lm/ft	150, 250, 350, 500 lm/ft	350, 550, 750, 950, 1200 lm/ft
EFFICACY	Up to 104 lm/W	Up to 103 lm/W	Up to 61 lm/W	Up to 134 lm/W
LIGHT & COLOR OPTIONS	Static White Dim to Warm (Sola) Tunable White (Duo) RGBW (Quadro)	Static White Dim to Warm (Sola) Tunable White (Duo)	Static White	Static White Dim to Warm (Sola) Tunable White (Duo)
CRI OPTIONS	80+, 90+, 95+	80+, 90+, 95+	80+, 90+	80+, 90+
SYSTEM FLEXIBILITY & INSTALLATION				
FIXTURE PROFILE	2 5⁄16" W × 1 1⁄16" H	1-7⁄8" W x 3⁄4" H	1" W x 7⁄16" H	4" W × 1 15⁄16" H
LENGTH OPTIONS	12", 18", 48" Modules	6" length increments up to 8'	6" length increments up to 8'	Individual sections from 2' to 12' Continuous runs
DRIVER LOCATION	Integral (Remote for RGBW)	Remote	Remote	Integral / Accessible within luminaire
MOUNTING / COVE INTEGRATION	15+ MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Flat Edge with Air Return, Knife Edge 35°, Wall Cove with Adjustable Brackets, Curved Ramp with Flat Edge, Curved Ramp with Knife Edge (Factory-Curved Options) Field-Curvable Ramps: Field-Curvable Ramp Flat Edge, Field-Curvable Ramp Knife Edge Direct Mount Ramps: Flat Edge, Flat Edge with Gasketed Cover, Flat Edge with Adjustable Brackets Others: Standalone Fixture, Standalone Fixture Adjustable Brackets with Mounting Rail	3 MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Knife Edge 35° Others: Standalone Fixture	3 MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Knife Edge 35° Others: Standalone Fixture with Mounting Brackets	3 MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Knife Edge 35° Others: Standalone Fixture with adjustable mounting bracket



EVOQ COLLECTION
ONLINE



EVOQ SLIM
ONLINE

 **Lumenwerx**

ALWAYS LIGHT
RIGHT

lumenwerx.com
R.09.2026