


IMPORTANT: Installation inst. are shown with Shalo 3 S and apply to the Shalo 3 V and T as well


NOTE: Wire dimming conductors as Class 1

1

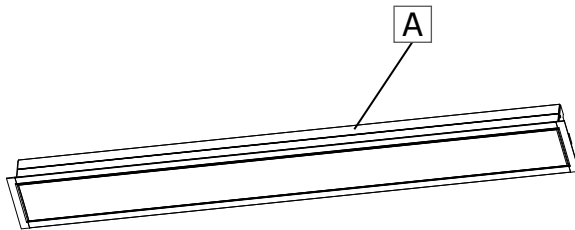


Make sure the power to the fixture (A) is turned off.

2

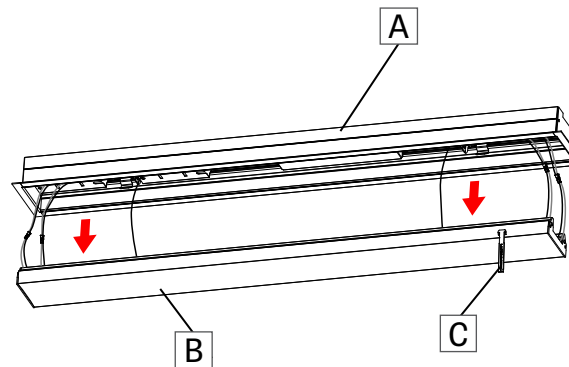


Extract the cartridges (B) from the fixture (A) by pulling it. Use the provided tool (C) to pull it.

3

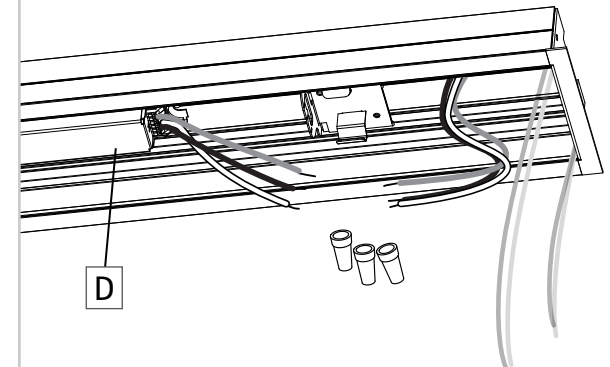


Disconnect wires from the driver (D).

4

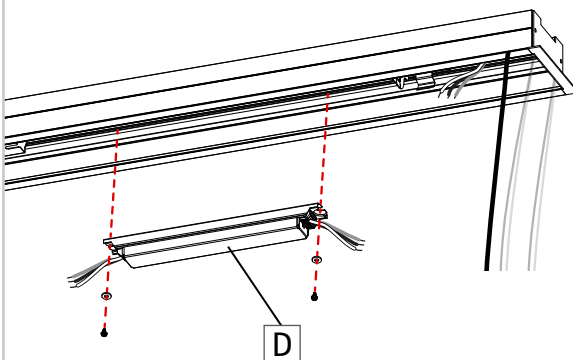


Unscrew the driver (D) from the fixture. Replace the driver and make connection with wire nuts.

5

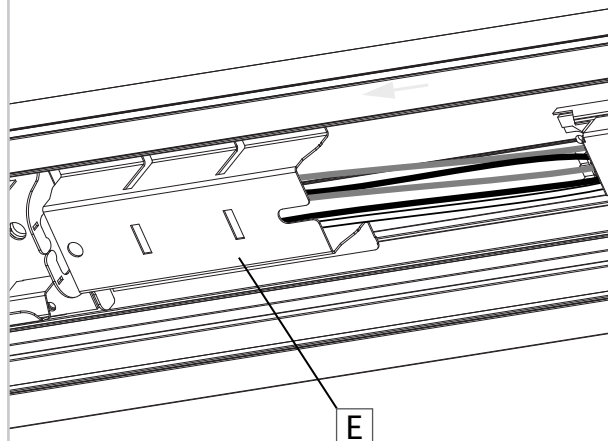

Make sure all the connectors are covered by the metal wire covers (E).

6

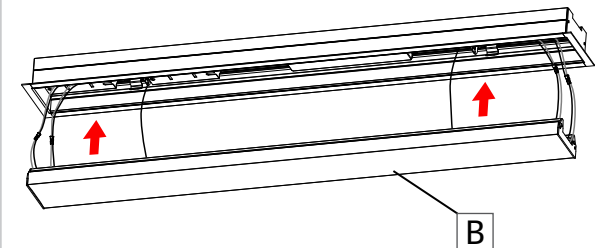

Press the cartridge (B) back in place. Make sure there are no wires or safety cables caught between the cartridge and the housing extrusion. The lens should be flush with the bottom of the housing extrusion.