


IMPORTANT: Installation inst. are shown with Shalo 3 S and apply to the Shalo 3 V and T as well


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

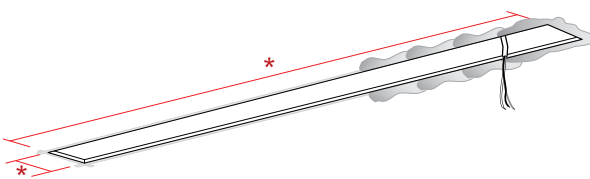


Prepare the area where the fixture is going to be installed. Cut hole in the drywall and install threaded rods (by others) according to the dimensions [*] in the client drawings. Tape and finish the edges of the drywall.

2

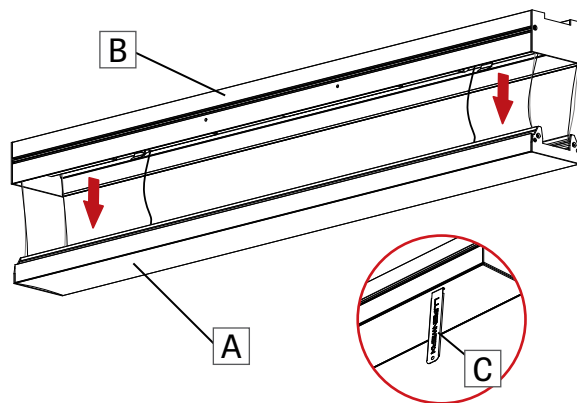



Extract the cartridge (A) from the fixture (B) by pulling it. Use the provided tool (C) to pull it. Leave the cartridge suspended by the safety cables.

3

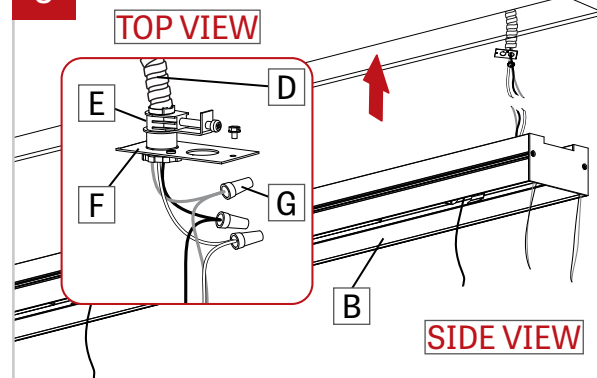


Install BX cable (D) (by other) through the BX connector (E) (by other) and install onto the power plate (F) provided. Make electrical connections between BX cable (D) and fixture cables using electrical marettes (G). Reinstall the power plate (F) to the fixture (B). **Number of wires may vary.**

4

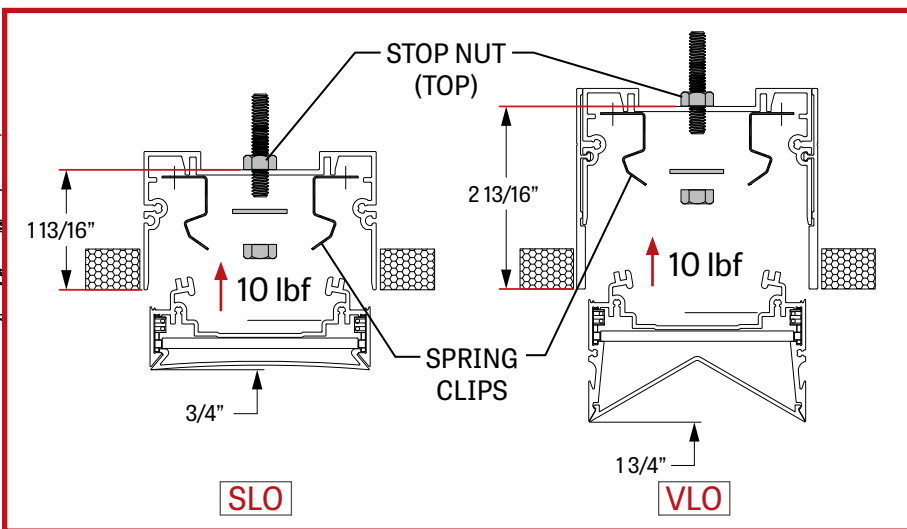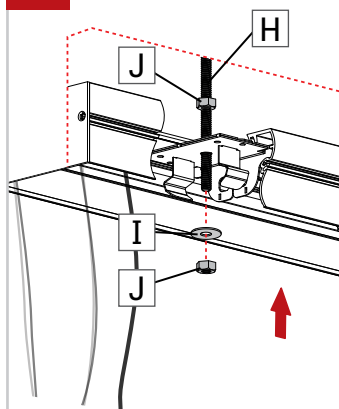


Install the fixture to the threaded rods (H) using the washers (I) and the nuts (J) (threaded rods, washers and nuts are by others).

5

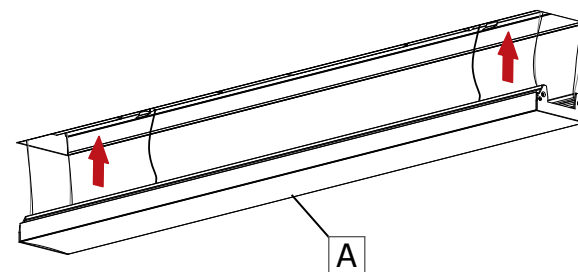


Press the cartridge (A) back in place. Make sure there are no wires or safety cables caught between the cartridge and the housing extrusion. The lens should be flush with the bottom of the housing extrusion.

6 CONTINUOUS SYSTEM

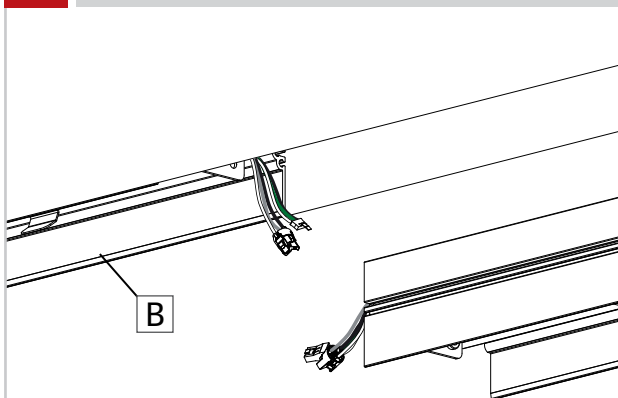


Apply steps 1 to 4 to the first fixture in the run (B).

7

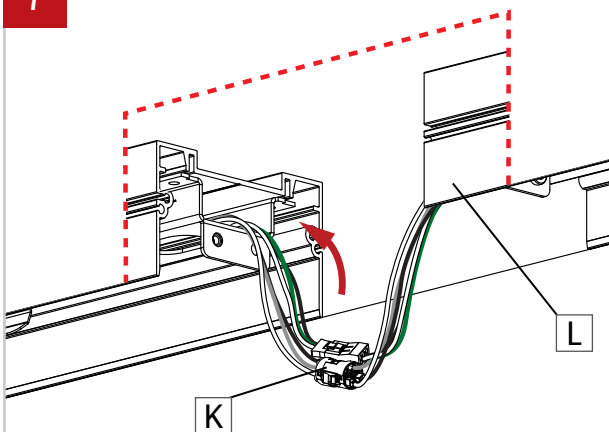



Connect the quick connectors (K) between the first two sections. Push the quick connectors (K) inside the first section. Insert the second section (L) into the drywall hole.

8

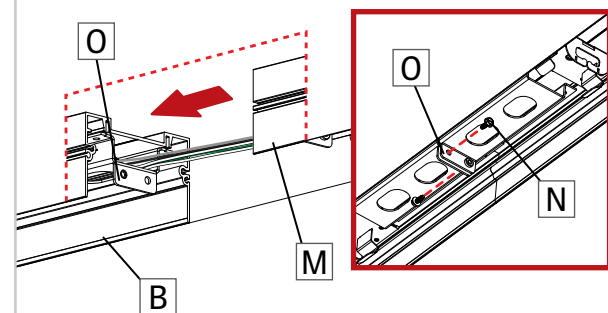


Slide the fixture (M) against the fixture (B) and align it straight. Make sure there are no electrical wires caught between the 2 fixtures. There should be no gap between the 2 aluminum extrusions. Tighten the provided screws (N) through joining bracket (O) to secure the fixtures together.

9

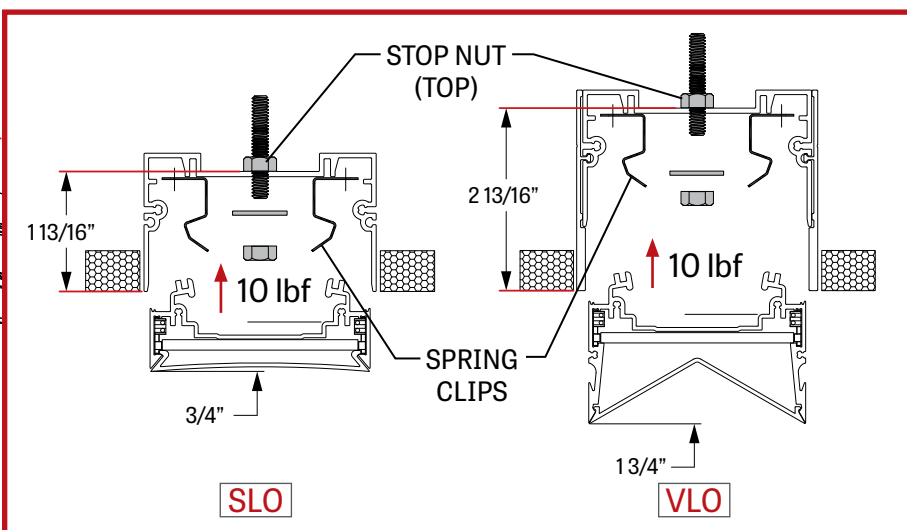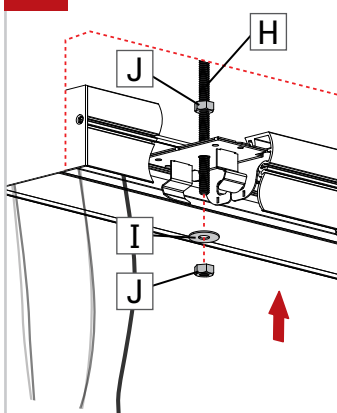

Install the fixture to the threaded rods (H) using the washers (I) and the nuts (J) (threaded rods, washers, and nuts are by others).

10

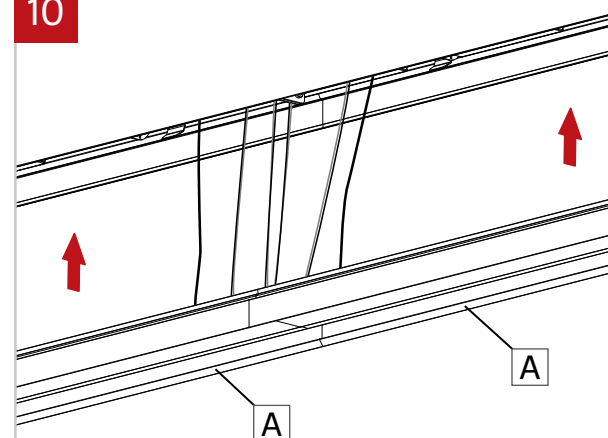

Press the cartridge (A) back in place. Make sure there are no wires or safety cables caught between the cartridge and the housing extrusion. The lens should be flush with the bottom of the housing extrusion.