



**NOTE:** Wire dimming conductors as Class 1

1

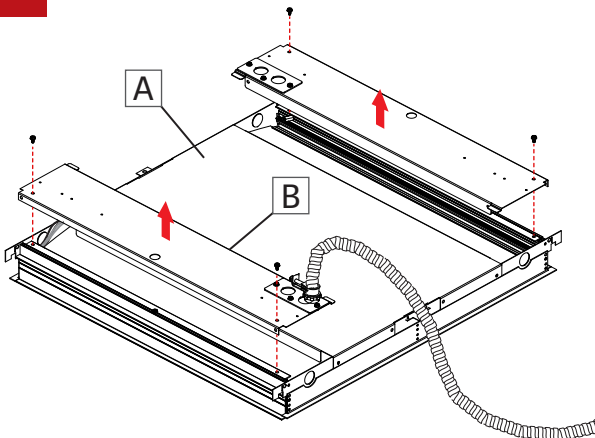


Make sure the power to the fixture (A) is turned off. Unscrew and open the side cover (B) on both sides.

2

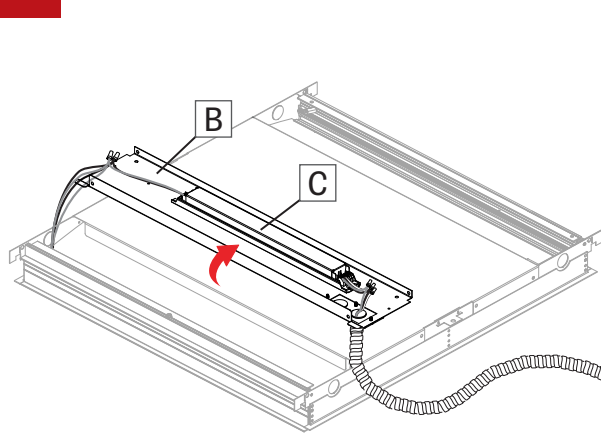


Rotate the side cover (B) on the power side to get access to the driver (C).

3

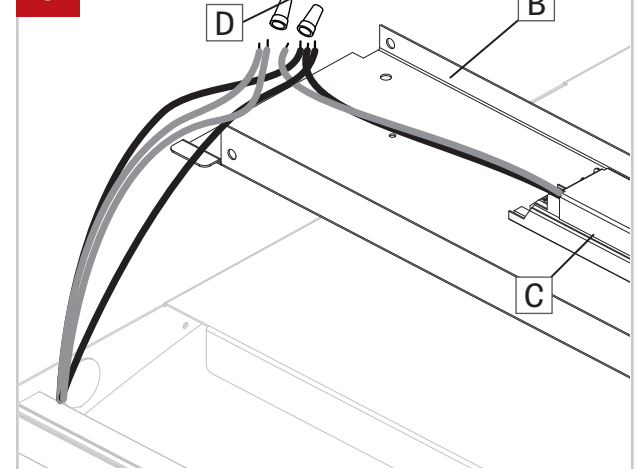


Disconnect electrical marettes (D) from the driver (C) and remove the side cover (B).

4

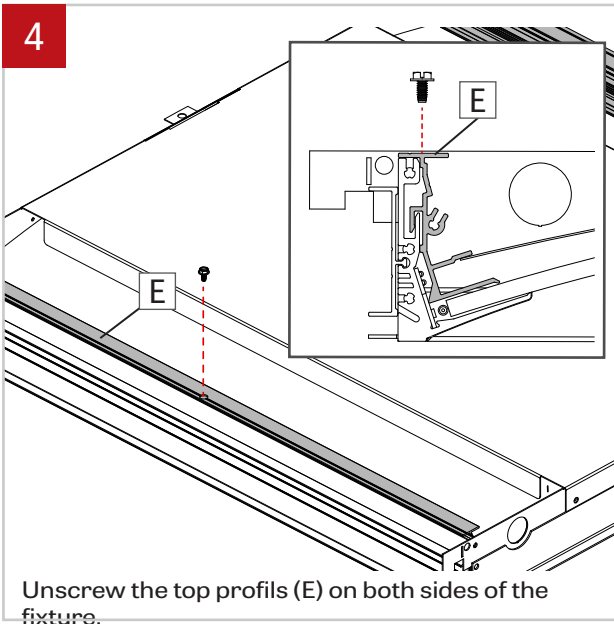


Unscrew the top profiles (E) on both sides of the fixture.

5

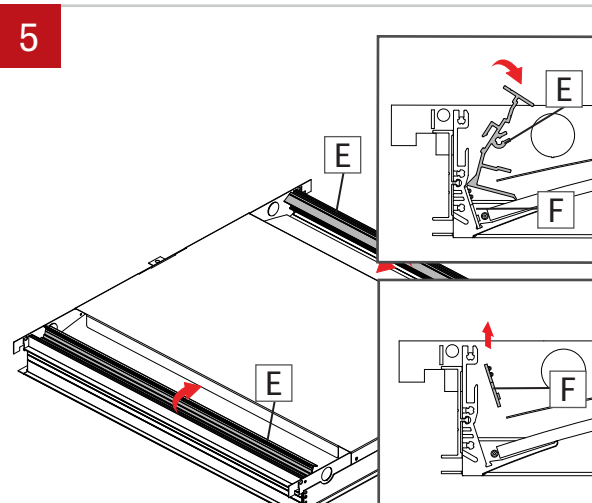


Remove the top profiles (E) by delicately lifting them to get access to the LED boards (F). Remove delicately the LED boards (F).

6

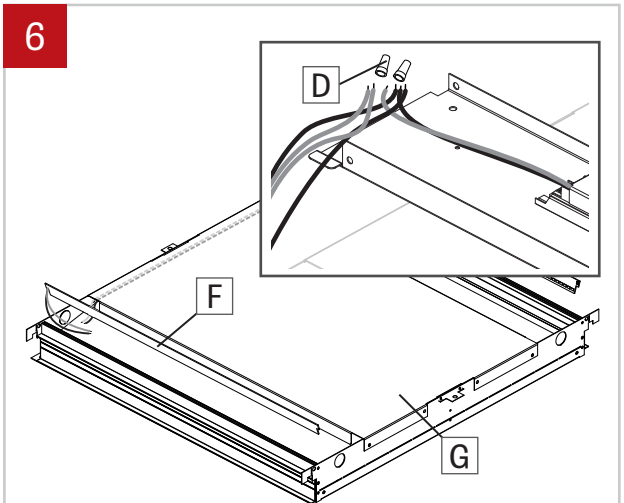


Replace LED boards (F) (LEDs placed down). Pass the wires of LED board under the center cover (G) if necessary and reconnect the LED boards (F) to the driver using electrical marettes (D).

7

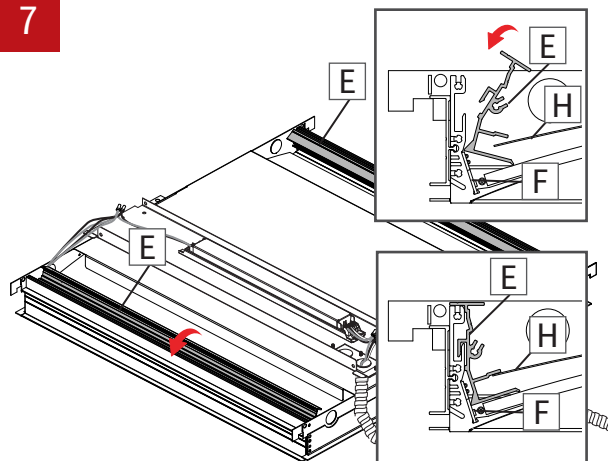


Replace the top profiles (E) by a pivot movement. The top profiles should slip below the reflectors (H) and in front of the LEDs (F). Be careful not to pinch any electricals wires.

8

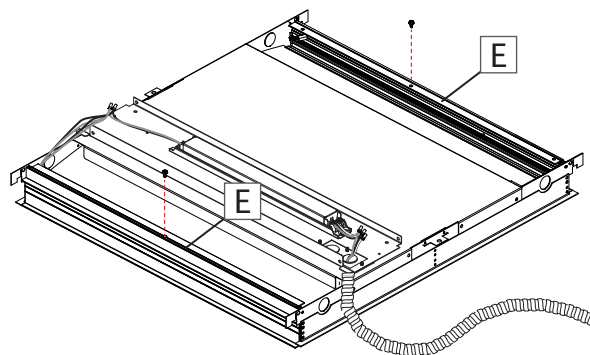

Secure the profiles (E) position by putting screws.

9

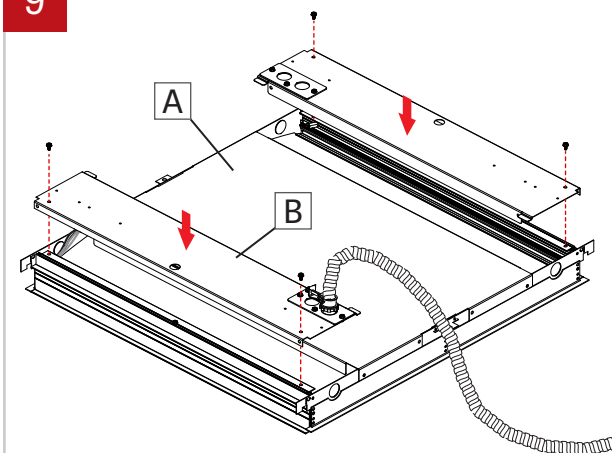

Put the side covers (B) back in place and screw them back to the fixture (A).