


Primo

SUBTLE. DISTINCTIVE.
PRACTICAL. SUSTAINABLE.





Primo 1'x4' CMO,
Recessed



Primo

Primo features a unique Concentric Micro-Prism Optic (CMO), achieved through precision moulding of two distinct Micro-Prism configurations.

The concentric optic delivers a subtle yet distinctive graphical appearance suited to both large and small spaces. Its square-base prism design ensures luminous consistency and visual comfort across all viewing angles.

UP TO
100 lm/W

Comfortable and
Efficient Illumination

PROFILE
3.5"


MOUNTINGS
Recessed
Surface

PROFILES

Primo 2'x2'



Primo 1'x4'

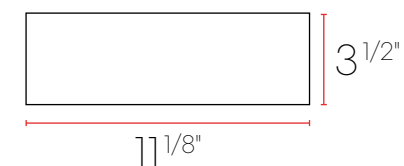



Construction Details

Primo introduces a subtle geometric expression through concentric forms—square within square, circle within square—bringing quiet visual distinction to architectural spaces.

Available in recessed 2' x 2' and 1' x 4' formats, Primo can be installed across a range of ceiling types to provide efficient, comfortable illumination. Its ultra-precise Micro-Prism optics support visual comfort while maintaining high efficacy.

Precise optical design and moulding enable the use of high-transmission acrylic, achieving luminous efficacy above 100 lm/W while ensuring smooth LED diffusion, balanced volumetric brightness, and consistent visual performance. Primo is suitable for office, education, and healthcare environments.

SIZES AND SHAPES


Recessed and surface mountings are available for all sizes and shapes.




Primo 2' x 2' PMO, Surface




Primo 2' x 2' CMO Square

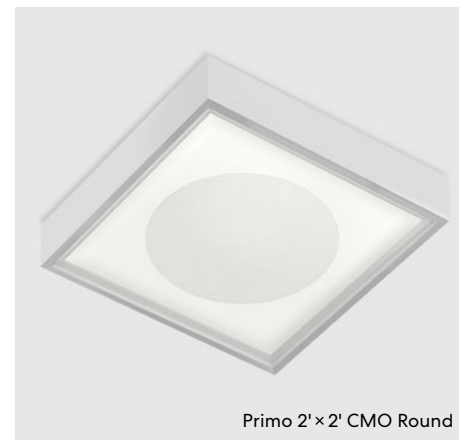


Primo 2' x 2' CMO Round

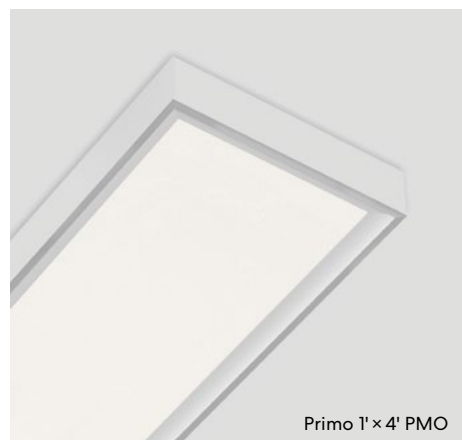

Primo 1' x 4' PMO

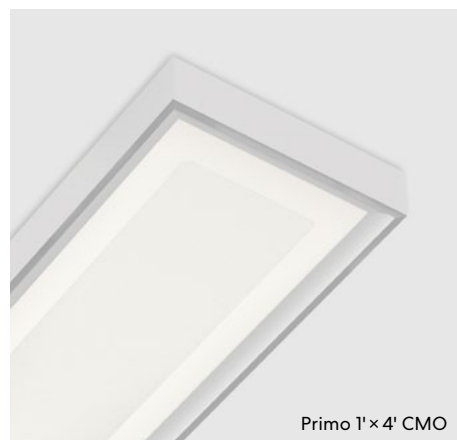

Primo 1' x 4' CMO

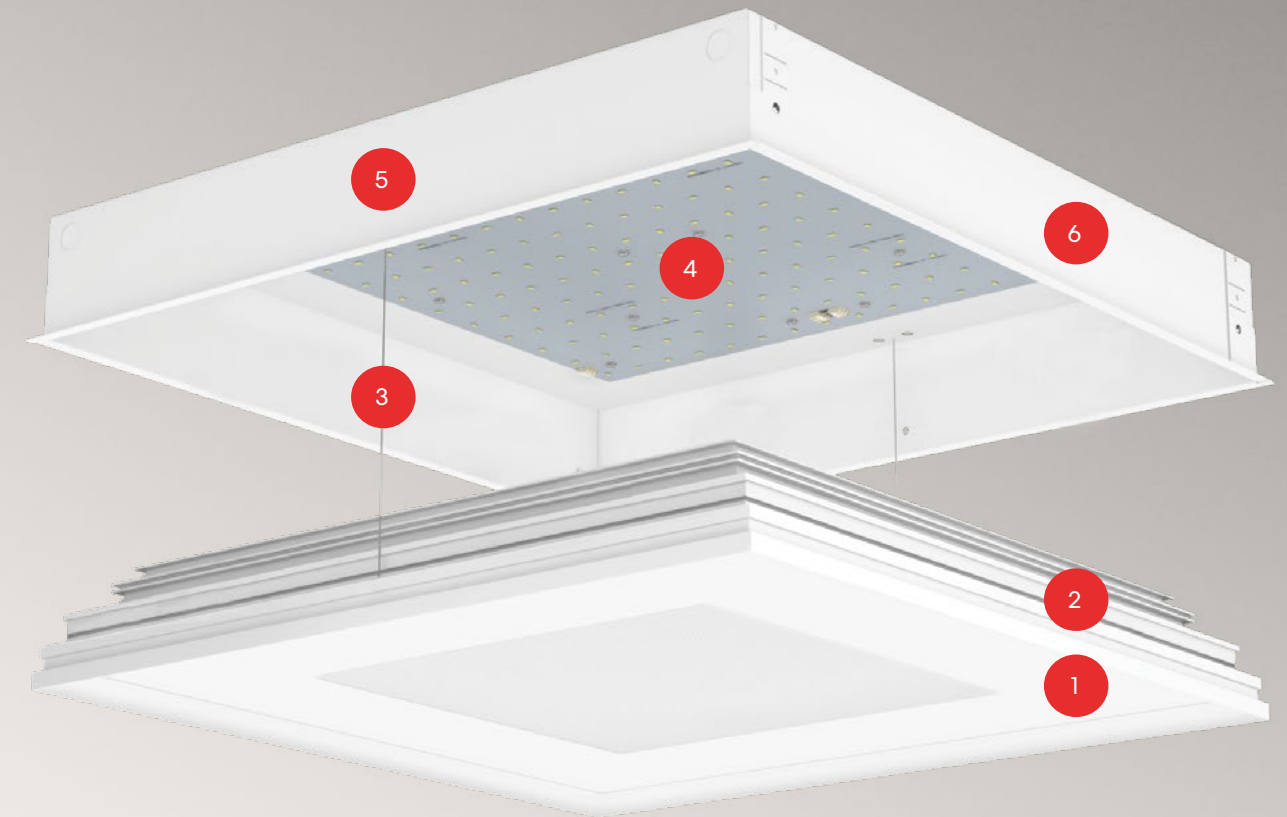

1

LENS

Concentric Micro-Prism Optic (CMO) or Precision Micro-Prism Optic (PMO), 1/8" thick, supported by a splayed edge within the lens frame.

4

LED ARRAY

Mid-power LED's, direct-mounted to luminaire housing for thermal dissipation. Spaced for uniform illumination of the optical cavity. Replaceable, with quick-connect wiring.

2

LENS FRAME

Extruded 0.07" thick aluminum for precise alignment and the elimination of light leaks. Integral reflectors with 95% reflective finish.

5

LED DRIVER

High-efficiency driver with adjustable drive current, directly mounted to luminaire housing for thermal dissipation. Concealed behind the lens frame, driver is easily reached for maintenance.

3

RETAINER CABLE

Supports lens frame during maintenance.

6

HOUSING

Die-formed 20 Ga. cold-rolled steel, post-painted. Quick-access plate and integral seismic hold-down fasteners. Matte white powder coat finish.



PRIMO
BROCHURE



PRIMO
ONLINE



ALWAYS LIGHT
RIGHT

lumenwerx.com
R.04.2026