

TOGO 18 PENDANT

LUMENWERX
WWW.LUMENWERX.COM



DESCRIPTION

Togo provides generous ambient illumination from a minimal and elegant ring form. Nestled in a crisp 4" high opaque band, the distinctive, annular diffuser glows inwardly. The diffuser's softly rounded compound curve lends Togo a slender appearance. Available in 18", 24", 36" and 48" diameters. Togo delivers efficient, widespread, direct/indirect illumination (65/35) with spacing criteria of 1.6 and a range of light outputs.

Togo's outer housing of extruded aluminum is welded and buffed to a seamless band that can be painted in our nine standard finishes, or an RAL custom color, to coordinate with virtually any interior finish.

The Togo driver mounts remotely, either above or below the ceiling. In addition to a conventional power cord, Togo also offers an ultra-clean mounting detail with integrated and power suspension cables.

Controls include dimming to 1% in 0-10V, line voltage, and digital protocols. Night light and emergency circuiting are available.

Togo supports the full range of Chromawerx Sola, Duo, and Quadro options for tunable white and RGBW expressive color.



Please see code on page 2 for all nine standard finishes.

TOGO 18 PENDANT

PROJECT: _____
TYPE: _____
NOTES: _____


TOGP	18IN	ULO		90
LUMINAIRE ID	SIZE	OPTIC	LIGHT SOURCE	CRI
TOGP - Togo Pendant	18IN - Ø 18"	ULO - Uniform Lambertian Optic	SW - Static white SOLA - Dim-to-warm single channel control 22K to 35K DUO - Tunable white 2-channel control 27K to 65K QUADRO - Four-channel RGB with 3500K white	90 - 90CRI

LUMEN PACKAGE	COLOR TEMP. ¹	VOLTAGE	DRIVER	ELECTRICAL
####lm - L1800lm - M2500lm - H3200lm L-Low, M-Medium, H-High, consult factory for other (static white, Duo and Sola only) 41W - 41W output (Quadro only)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K ¹ Not applicable for Duo, Sola and Quadro.	120 - 120V 277 - 277V UNV - 120V-277V 347V ² - 347V ² Available with D1 and RDB only.	Static white D1 - 1% 0-10V DA ³ - DALI LDE1 ³ - Lutron Hi-lume 1% Eco	1 - 1 circuit Sola SD1 - Single 0-10V input Duo DD1 - Dual 0-10V input for CCT/intensity DA ³ - DALI PSQO ³ - Lutron T-series 1% Tunable White DMX ^{3,4} - DMX Quadro DMX ^{3,4} - DMX ³ On-site commissioning is required. ⁴ To specify, see pages 7 to 13.

DRIVER BOX ⁵	CANOPY FINISH	POWER	HEIGHT ¹⁰	FINISH	OPTIONS
RCD ^{6,7} - Round Canopy Driver Box RDB - Remote Driver Box ⁵ For more information, see page 3. ⁶ For Sola and Duo, RCD is only available for lumen packages of 3500lm or less. ⁷ RCD is not available with DMX or with 347V. Consult factory for DALI or Lutron drivers.	AL - Aluminum B - Black W - Matte white CF# - Custom finish, specify RAL#	POC ^{8,9} - Integrated suspension power-over-aircraft cable BAC - Black power cord + aircraft cable WAC - White power cord + aircraft cable ⁸ For more information, see page 3. ⁹ Not available with DMX.	##IN - Distance from the canopy to the fixture in inches ¹⁰ Minimum mounting heights: • With RCD: 19.25" • With RDB: 13.25"	W - Matte white AL - Aluminum BK - Black RAL 1028 - Yellow RAL 2004 - Orange RAL 3020 - Red RAL 4010 - Magenta RAL 5002 - Blue RAL 6018 - Green CF# - Custom finish, specify RAL#	TPF - Top plate finish, specify if differs from white
See website for the Pendant Mounting Guide					


See page 3 for ordering code detailed information

CROSS SECTION

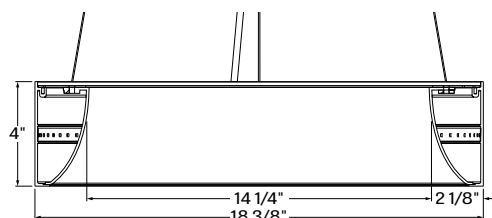

TOGP - Togo Pendant

3D CROSS SECTION



TOGP - Togo Pendant

DMX WALL CONTROLS

To specify see pages 7 to 13.




TOGO 18 PENDANT

MOUNTING OPTIONS



All mounting options below are available with either conventional aircraft cables and jacketed Class II power cord (CPC), or elegant integral power-over-aircraft cables (POC).

ROUND CANOPY DRIVER BOX

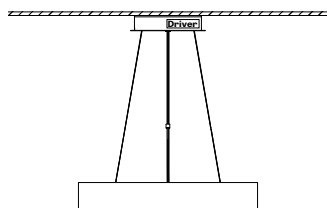



RCD - Round Canopy Driver Box
Driver is furnished in a 6" or 9" diameter, 2" deep enclosure that also supports suspension and power cables. Enclosure is available in standard finishes (see ordering code).

REMOTE DRIVER BOX IN DRYWALL

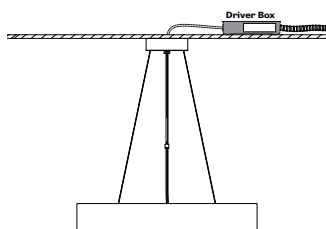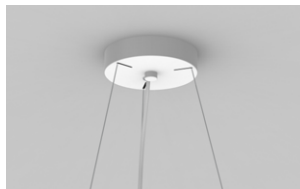

RDB - Drywall Remote Driver
Driver is in a 20"x4"x2" enclosure with brackets for mounting to ceiling joists or other supporting members. The 5 1/2" diameter x 1 5/8" deep wiring compartment canopy conceals and supports suspension and power cables. It is available in standard finishes (see ordering code).

REMOTE DRIVER BOX IN GRID



RDB - Ceiling remote driver for grid ceiling
Driver is in a 20"x4"x2" enclosure with brackets for mounting to ceiling runners. The 5 1/2" diameter x 1 5/8" deep wiring compartment conceals and supports for suspension and power cables.

INTEGRATED SUSPENSION AND POWER-OVER-AIRCRAFT CABLE (POC)


The integrated suspension and power-over-aircraft cable option provides an elegant mounting option without the familiar jacketed power cord.

Current from the driver to the LED arrays flows through seven-strand galvanized copper conductors. A dielectric polymer coating insulates the cable, which is supported by insulated holders at the ceiling and luminaire mounting plate.

Our standard integrated power-over-aircraft cable supports all dimming and control protocols available through the driver options without additional conductors.



Seven-strand galvanized copper conductors.
Cable diameter - 0.06" (1.55mm)

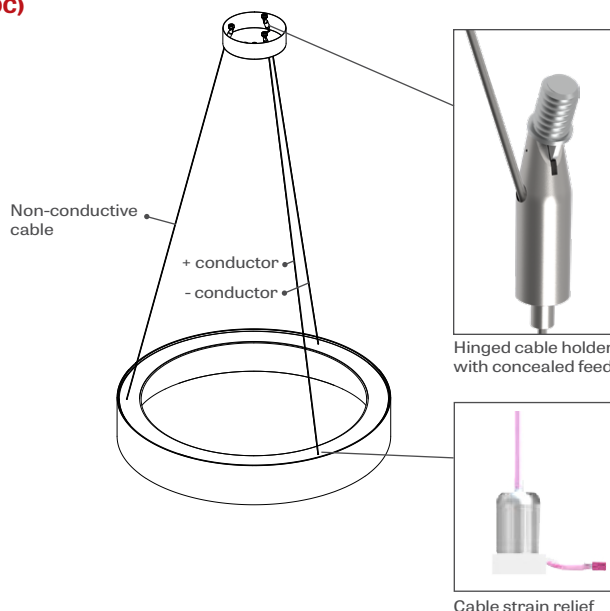

TOGO 18 PENDANT

OPTIC

Uniform Lambertian Optic (ULO) - Thermoformed from seamless impact-modified white PMMA, the ULO optic provides even luminosity, with up to 88% transmission. The tapered, compound curve minimizes the luminaire form.

Combined with the LED array running around the inside of the supporting band, the annular form and ULO optic creates a widespread 67% direct and 33% direct light distribution with spacing criteria of 1.6.

LIGHT SOURCE - LED - STATIC WHITE

Custom array of mid-flux LED's are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K, and 4000K with 90 CRI with elevated R9 value. Color consistency is maintained to 3 SDCM. LEDs are operated at a reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and results have shown L80 lumen maintenance are greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

PERFORMANCE AT 4000K

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	4000K	19.5	1800	92
medium output	4000K	28	2500	90
high output	4000K	37	3200	87

CHROMAWERX - TUNABLE WHITE


Custom array of alternating color temperature mid-flux LEDs are mounted directly to the housing for optimal thermal performance. For the Duo products, a color temperature range from 2700K-6500K is achievable with color points on or below the black body curve. For the Sola products, a color temperature range from 2700K-3500K is controlled synchronously with intensity. Color consistency between fixtures is maintained within 3SDCM. LEDs are operated at a reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance are greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Chromawerx Sola is a single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple digital or analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable, but the default option runs from 3500K at 100% full power to 2200K at 5% full power.

Chromawerx Duo is a two-channel control. It uses analog or digital protocols for synchronous control of both warm and cool LED arrays, enabling the user to set color temperature and light output. Commonly called "tunable white", Chromawerx two-channel control provides the range of warm (2700K) to cool (6500K) color that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures.


ANSI C78.377-2015

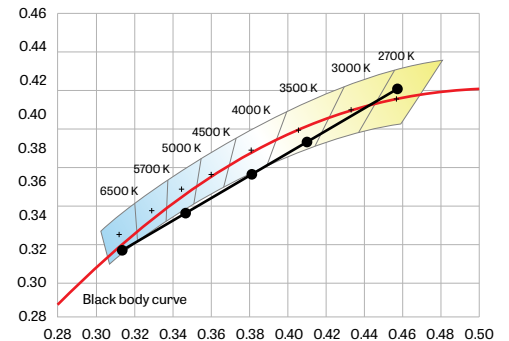

TOGO 18 PENDANT

CHROMAWERX - RGBW

Chromawerx Quadro is a four-channel control that operates an RGBW LED array and addresses the need for more expressive color in architectural applications. The DMX driver supports familiar programming tools for both dynamic multi-hued color and precise white color point control. While a typical user interface will be a DMX controller by others, Lumenwerx also offers a simple control station for stand-alone color changing applications.

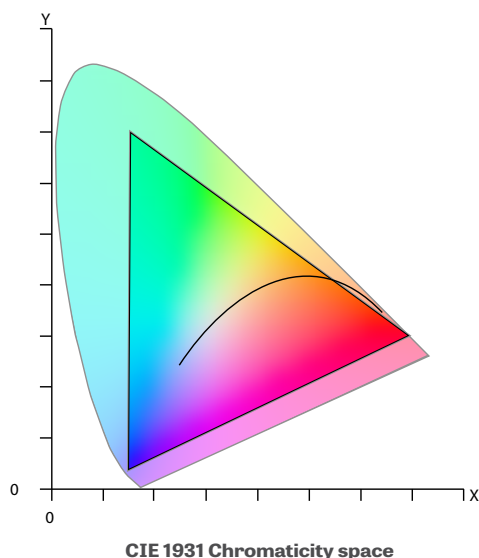

ELECTRICAL REMOTE

All remote drivers are furnished with factory enclosure for recessed installation in drywall and grid ceilings.

DALI (Duo Only)

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. Dimming range from 100%-0%. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

0-10V (Sola)

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using a single 0-10V control signal, the fixture warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

0-10V (Duo)

Factory-set adjustable output current LED driver with universal (120-277VAC) input. Controlled via two individual 0-10V signals, one for setting the intensity of the fixture down to a minimum of 1% and the other for adjusting the CCT of the fixture (default range of 2700K-6500K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF>0.9, THD<20% at 100% load conditions.

DMX (Quadro & Duo only)

Factory-set, adjustable output current, multi-channel LED driver with universal (120-277VAC) input. Using DMX wall controls (optionally supplied by Lumenwerx) or an existing DMX control system, either two channels of LEDs (warm-white & cool-white) for Duo or four channels of LEDs (Red/Green/Blue/White) for Quadro are independently adjustable. Each DMX driver has multiple output channels that can be independently addressed at the factory or on-site using built-in RDM (Remote Device Management) functionality. Dimming range from 100%-0%. At maximum driver load, efficiency<89%, PF>0.9, THD<20%.

FINISH

Interior - 95% reflective, matte white powder coating

Exterior - Side trim is offered in a range of vibrant color powder coatings.

CONSTRUCTION

Housing - Rolled and seamlessly welded aluminum extrusion 0.125 in thick, wide variety of colored powder coating

Diffuser - Uniform Lambertian Optic, thermoformed impact modified acrylic, completely enclosed

WEIGHT

Togo 18 - 4.4lbs - 2kg

CERTIFICATIONS


ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

TOGO 18 PENDANT


1800 LUMEN AT 90CRI - LOW OUTPUT

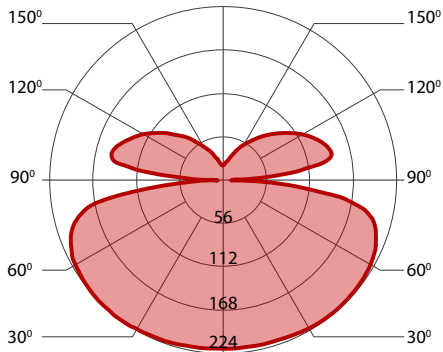

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	2700K	20	1800	89
low output	3000K	19.5	1800	92
low output	3500K	19	1800	95
low output	4000K	19.5	1800	92
low output	5000K	17.5	1800	103
low output	6500K	17.5	1800	102


2500 LUMEN AT 90CRI - MEDIUM OUTPUT

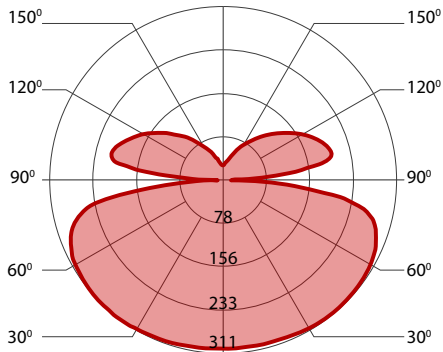

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	29	2500	86
medium output	3000K	28	2500	90
medium output	3500K	27	2500	92
medium output	4000K	28	2500	90
medium output	5000K	25	2500	100
medium output	6500K	25.5	2500	99

3200 LUMEN AT 90CRI - HIGH OUTPUT

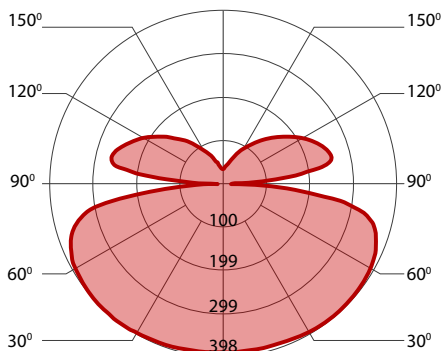

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	2700K	38	3200	84
high output	3000K	37	3200	87
high output	3500K	35.5	3200	90
high output	4000K	37	3200	87
high output	5000K	32.5	3200	98
high output	6500K	33	3200	97

TOGO 18 PENDANT

CHROMAWERX TUNABLE WHITE AND DIM TO WARM

DUO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

DMX controller supplied by Lumenwerx

How many zones do you have?
A zone consists of one or more luminaires behaving identically.



1 Zone



2 Zones

How to calculate the required number of drivers:

Per fixture

1x
Driver / 50W
per side

To Calculate
of drivers

1 - 4 Zones

5 or more Zones

Do you have more than
32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller.

WALL CONTROLLER

WCW - wall controller white
WCB - wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

TOGO 18 PENDANT

CHROMAWERX QUADRO - RGBW

QUADRO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓


DMX controller supplied by Lumenwerx

How many zones do you have?

A zone consists of one or more luminaires behaving identically.



1 Zone



2 Zones

How to calculate the required number of drivers:

Per fixture

1x
Driver / 5000lm
per side

To Calculate
of drivers

1 Zone

2 to 3 Zones

4 or more Zones

Do you have more than
32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller type 1.

WALL CONTROLLER

WC1W - Single zone wall controller white
WC1B - Single zone wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

NO

YES

Order a standard Lumenwerx wall controller type 2.

WALL CONTROLLER

WC2W - 3 zone wall controller white
WC2B - 3 zone wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓


Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

TOGO 18 PENDANT

CHROMAWERX TUNABLE WHITE AND RGBW

GENERIC DMX NETWORK ARCHITECTURE

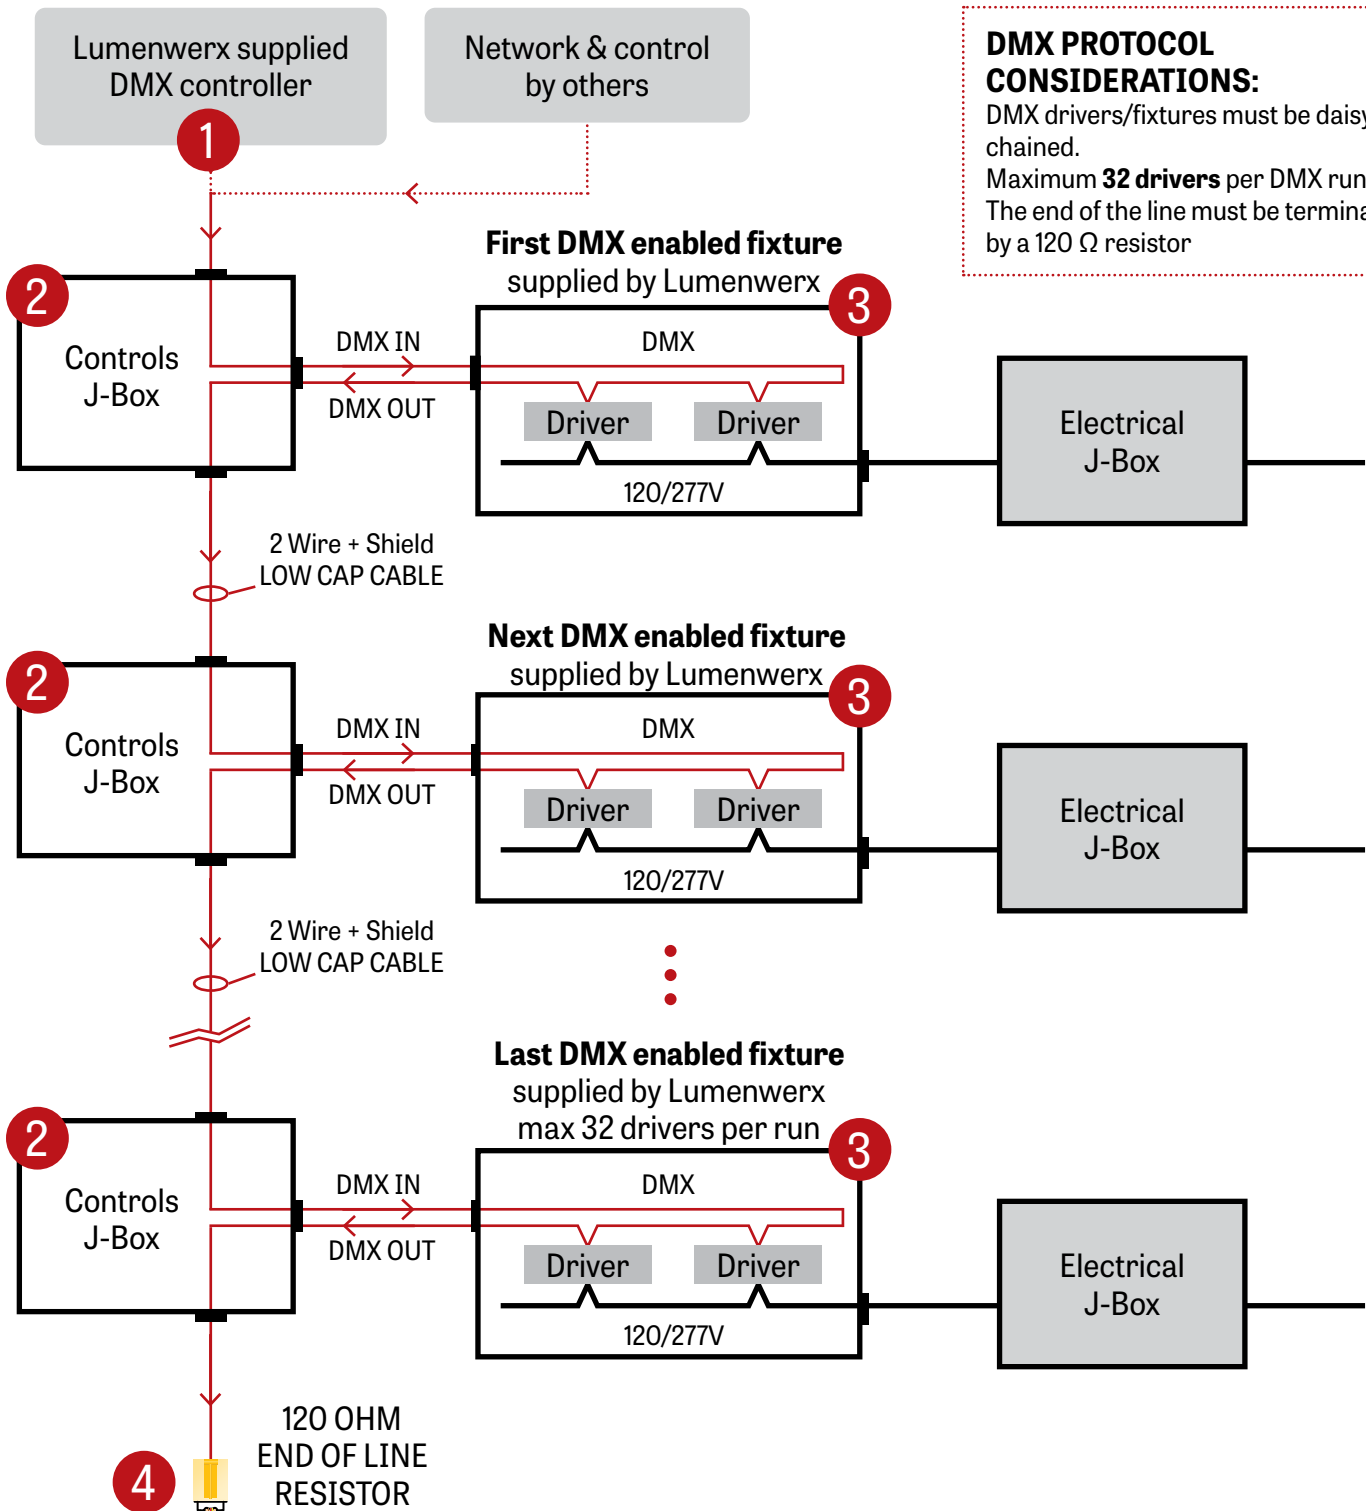

TOGO 18 PENDANT


CHROMAWERX TUNABLE WHITE AND RGBW

1 LUMENWERX SUPPLIED DMX CONTROLLER

To the first fixture

2 Wire +
Shield Low Cap Cable


WALL BOX SUPPLIED BY OTHERS

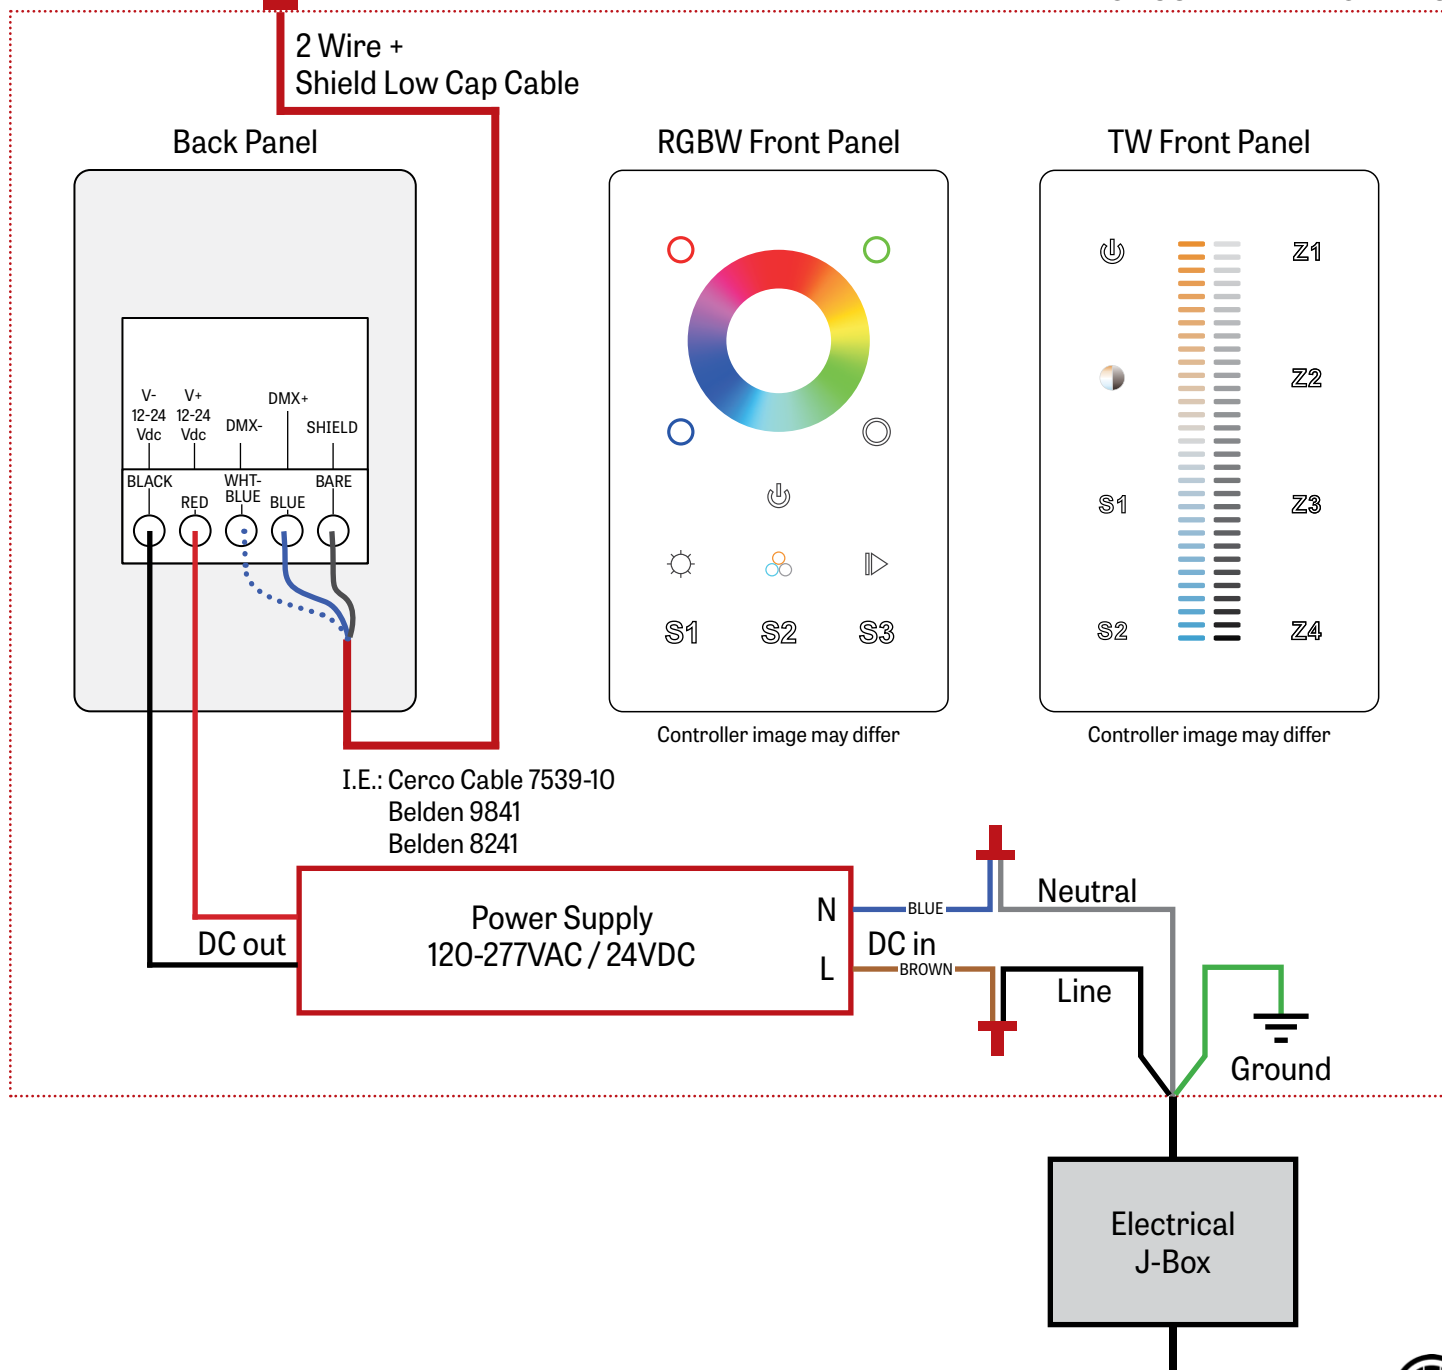


TOGO 18 PENDANT

CHROMAWERX TUNABLE WHITE AND RGBW

2 J-BOX DMX DAISY CHAIN DETAIL

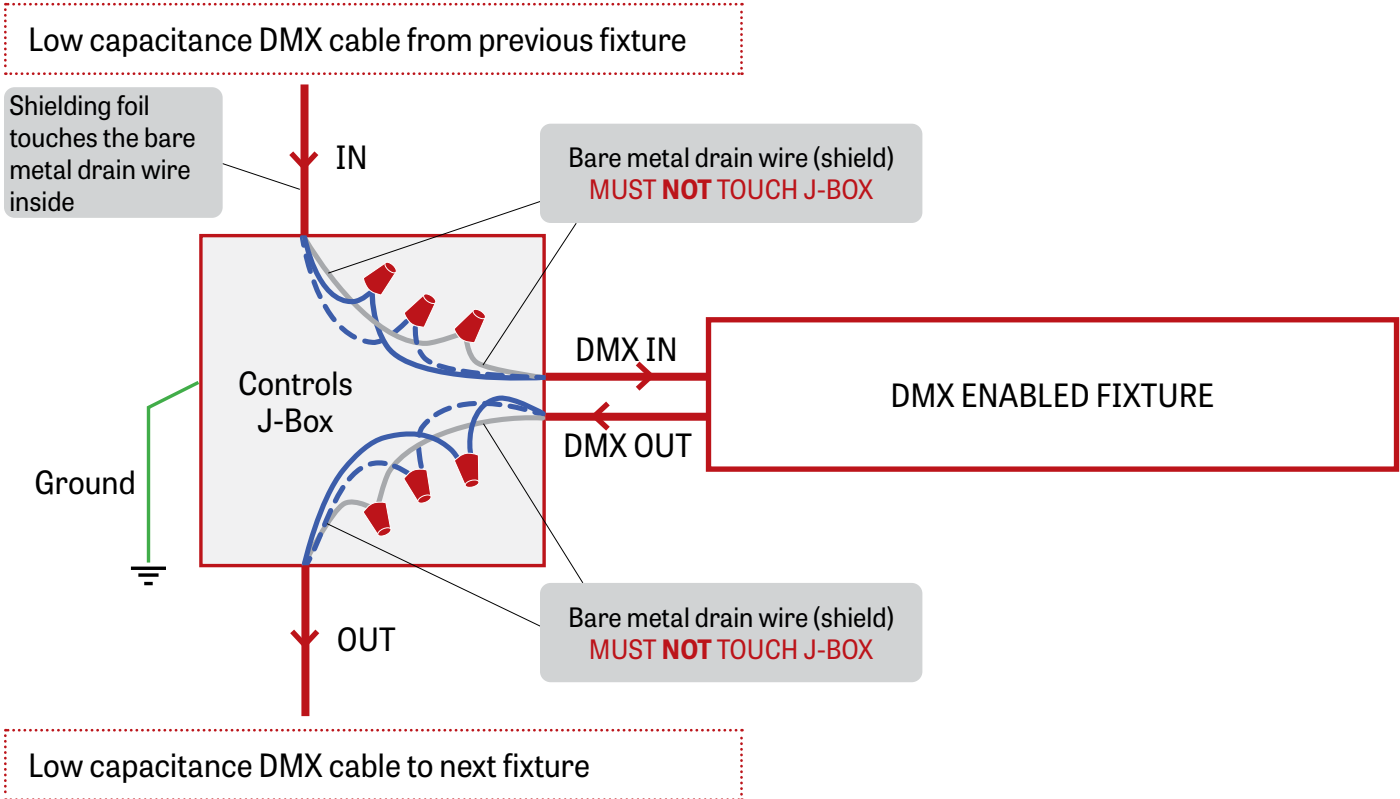


3 DMX CONNECTION PENDANT & WALL REMOTE DRIVER

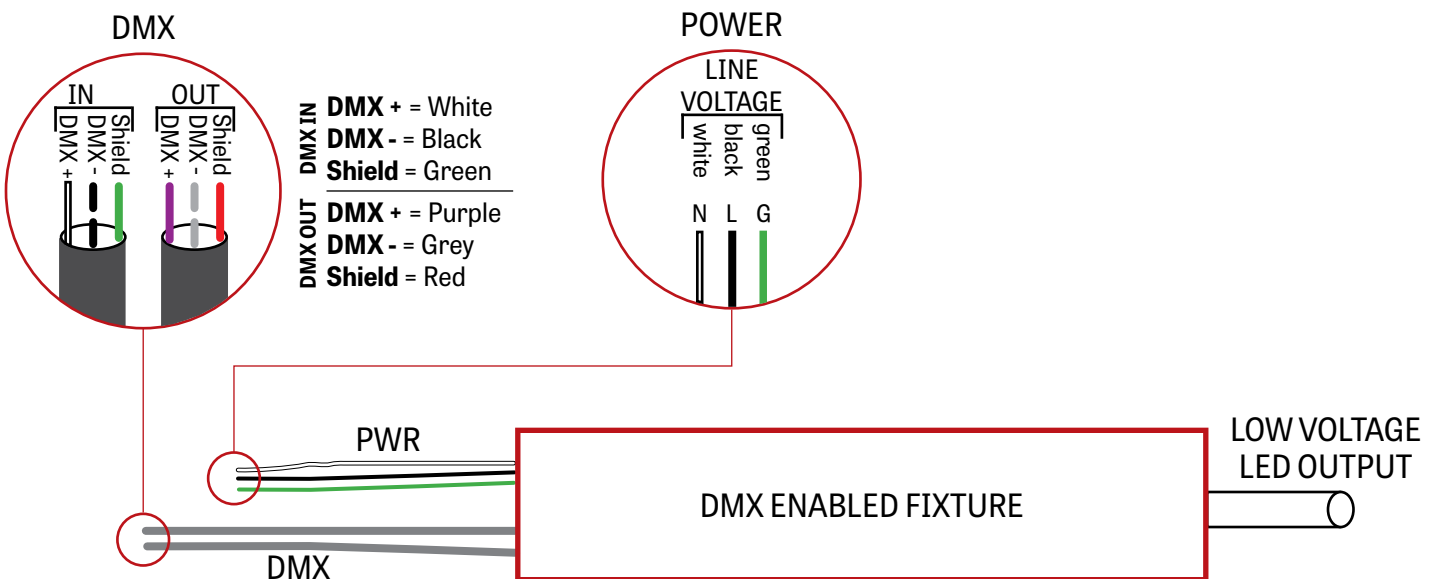

TOGO 18 PENDANT

CHROMAWERX TUNABLE WHITE AND RGBW

4 LAST DMX CONNECTION DETAIL

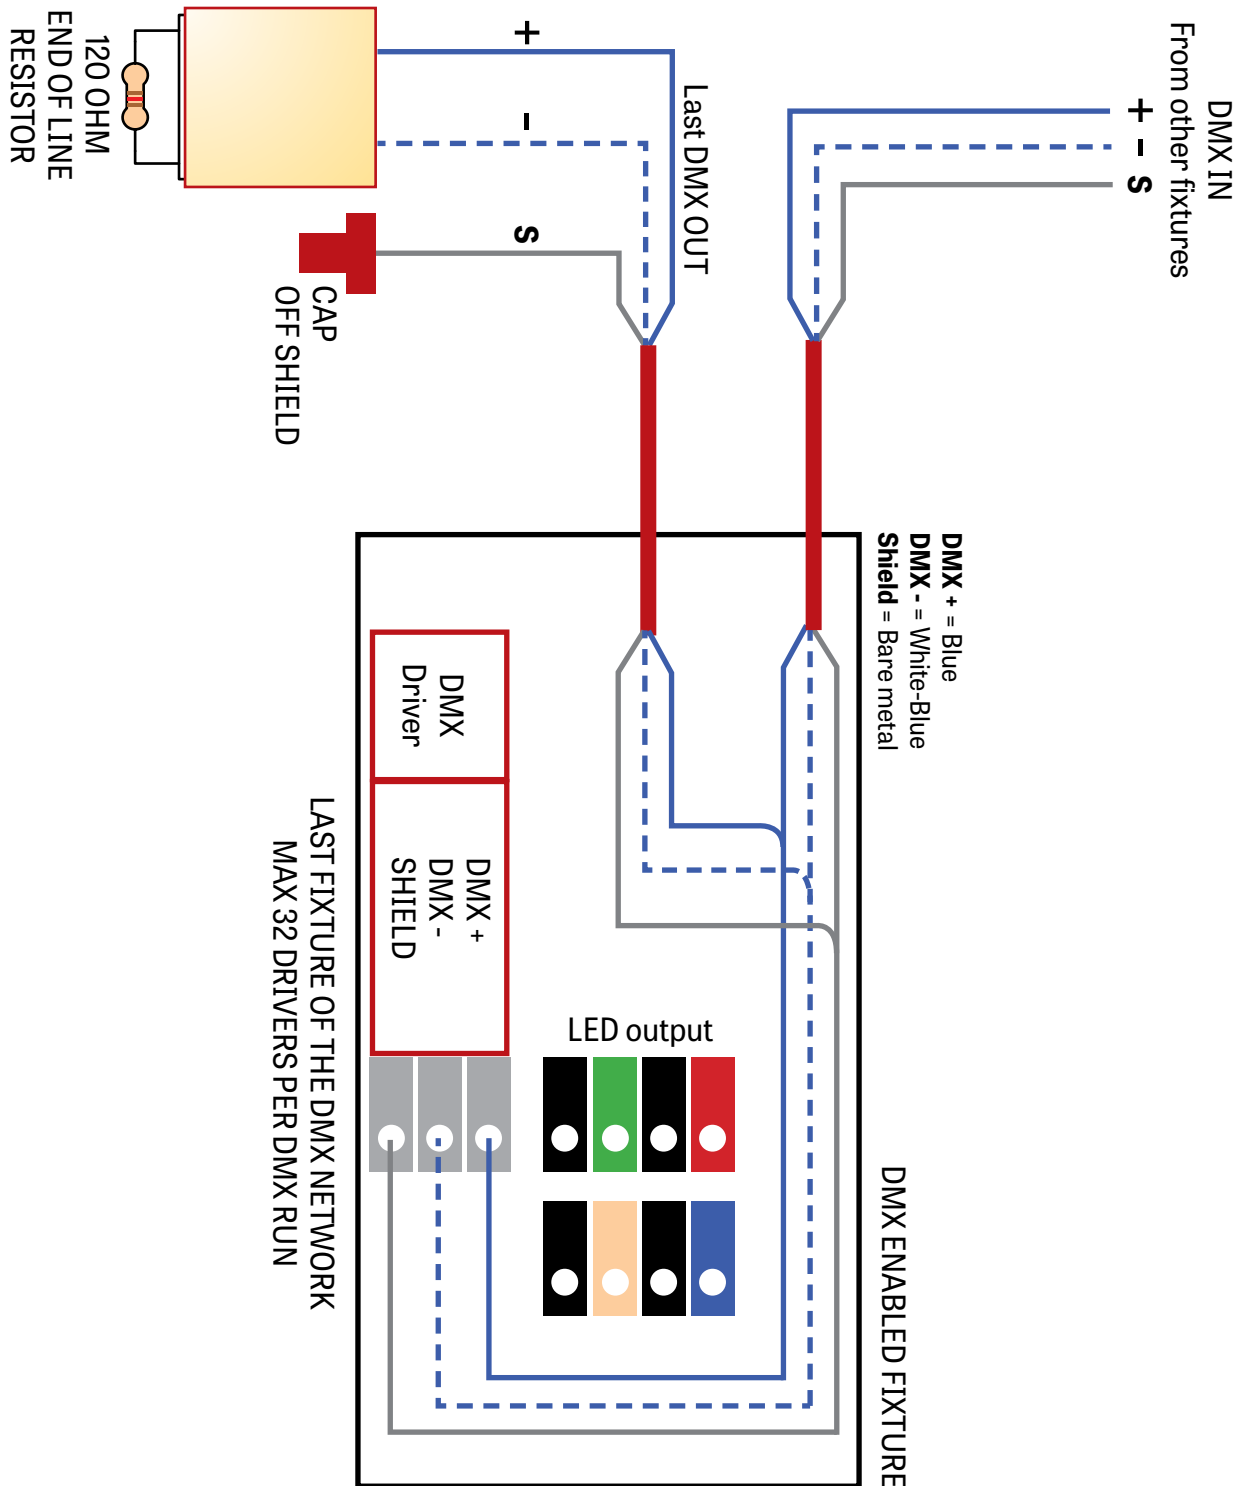

TOGO 18 PENDANT


CHROMAWERX TUNABLE WHITE AND RGBW

DMX WALL CONTROLLER - TUNABLE WHITE

Default DMX Addresses:

1. WARM | 2. COOL

WC

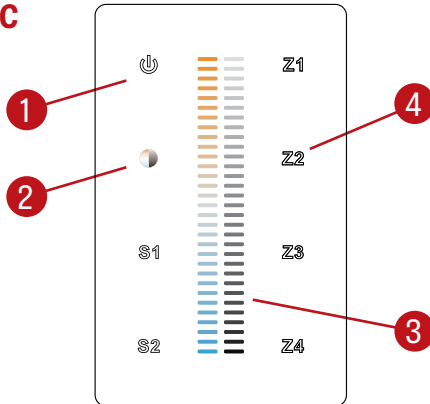


- (1) Power: Use this button to turn ON or OFF the fixture.
- (2) Brightness/CCT: Use the color/brightness toggle button to choose between color/brightness. When Blue: brightness is selected; when Yellow: color is selected.
- (3) Slider: Depending on the mode chosen in step 2, the slider will allow the user to set desired color or brightness.
- (4) Zone select: Up to 4 zones can be selected, either independently or together. Once selected, the commands will be sent to the zone identified by a Blue LED.

DMX WALL CONTROLLER - RGBW

Default DMX Addresses:


1. RED | 2. GREEN | 3. BLUE | 4. WHITE

WC1

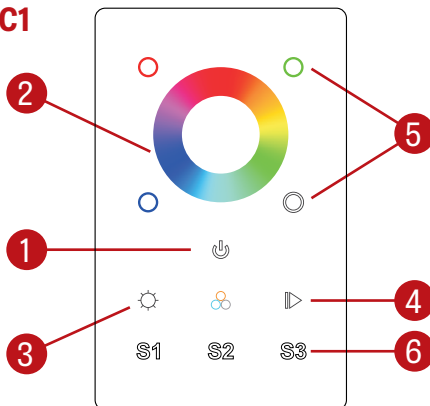

- (1) Power: Use this button to turn ON or OFF the RGBW fixture.
- (2) Color Wheel: The wheel is used to rapidly select a color (RGB colors only).
- (3) Brightness (RGB): Hold down this button to either increase or decrease the brightness of the current RGB selection. White will not be affected by the RGB brightness button.
- (4) Color Cycle: This button will start an animation, rotating between reds, greens, and blues, the arrows allow the user to speed up or slow down the animation.
- (5) Individual Colors: By pressing and holding a color, it will be possible to brighten or dim it. Quickly pressing a color will either turn it OFF or turn it ON to its previous dim level. White: In order to activate or deactivate and dim the White channel, the White button needs to be used.
- (6) Scenes: By holding down one of the scenes button, the current color selection is saved. It can be later accessed by quickly pressing on one of the Scene buttons.

WC2

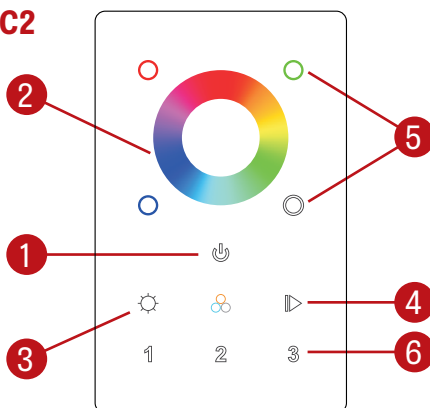

- (1) Power: Use this button to turn ON or OFF the RGBW fixture.
- (2) Color Wheel: The wheel is used to rapidly select a color (RGB colors only).
- (3) Brightness: Hold down this button to either increase or decrease the brightness of the current RGB selection. White will not be affected by the RGB brightness button.
- (4) Color Cycle: This button will start an animation, rotating between reds, greens, and blues, the arrows allow the user to speed up or slow down the animation.
- (5) Individual Colors: By pressing a color, it will be possible to brighten or dim that specific color. White: In order to activate or deactivate and dim the White channel, the White button needs to be used.
- (6) Zone: By holding down one of the zone buttons, a zone can be selected and controlled.