



NOTE: Wire dimming conductors as Class 1

1

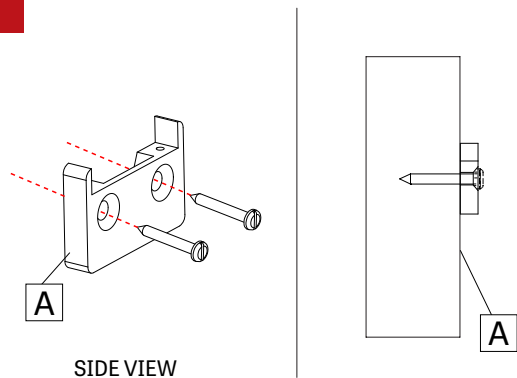


Locate wall bracket position using provided client drawing. Install mounting brackets (A) to wall. Align with structural stud (need double studs – distance between screws is 1.250") or use metal anchors with min. length 1.250". Flat head Philips drive screw, nominal size #10, min. length 1.250".

2

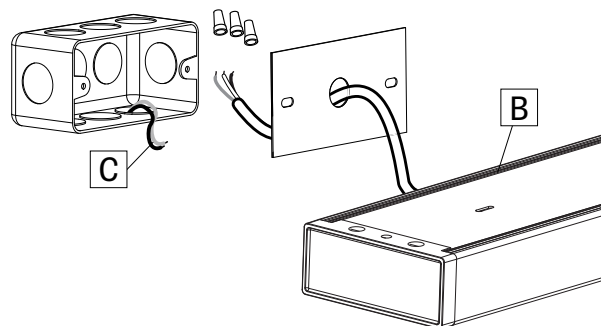

Make electrical connection between fixture (B) and wall power cable (C).


3

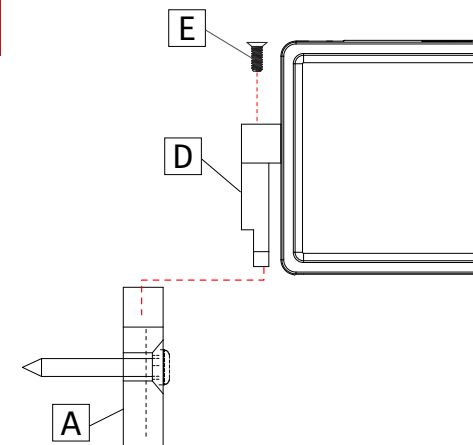

Insert fixture bracket (D) into wall bracket (A) and secure it in place with supplied screw (E).


4

CONTINUOUS SYSTEM

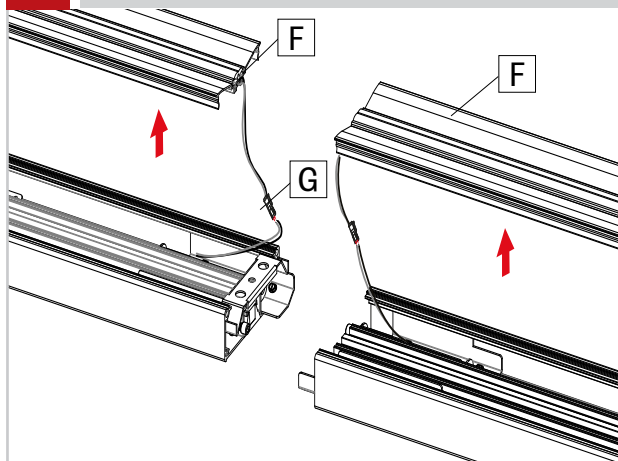


Remove the top cartridges (F) by pulling them up and disconnect the quick connectors (G). Keep the cartridges (F) in a safe place.

5

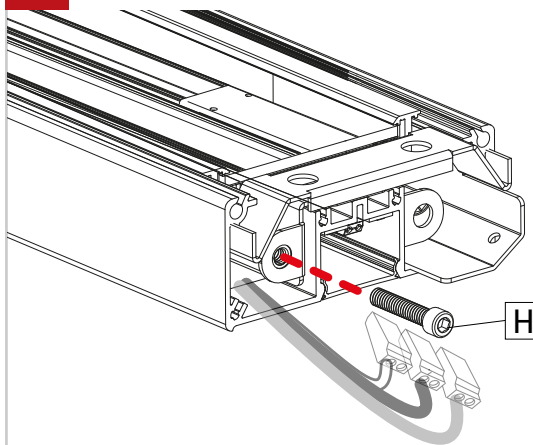

Remove the screws (H) on the joiner and put them in a safe place.

6

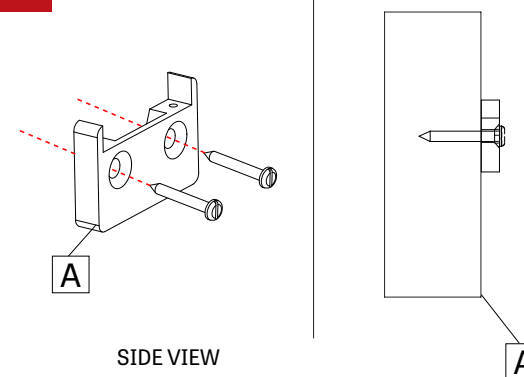

Locate wall bracket position using provided client drawing. Install mounting brackets (A) to wall. Align with structural stud (need double studs – distance between screws is 1.250") or use metal anchors with min. length 1.250". Flat head Philips drive screw, nominal size #10, min. length 1.250".

