



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.



Wire dimming conductors as Class 1.




Fixtures with an output of 1000 lm/ft or higher must not be installed in IC conditions.

### SINGLE FIXTURE


#### 1 PREPARE THE INSTALLATION AREA.

Prepare the area where the fixture is going to be installed. Cut hole in the drywall according to the dimensions [F] given in the client drawings.

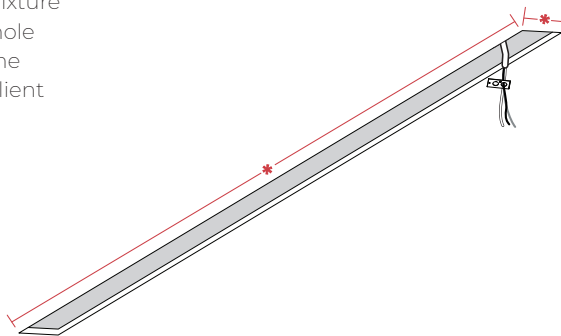


#### 2 PREPARE THE FIXTURE.

Make sure the power to the fixture [A] is turned off, the lens is installed on the fixture and protected by a cover. The temporary brackets [B] should be aligned with the obround holes of the flanges.

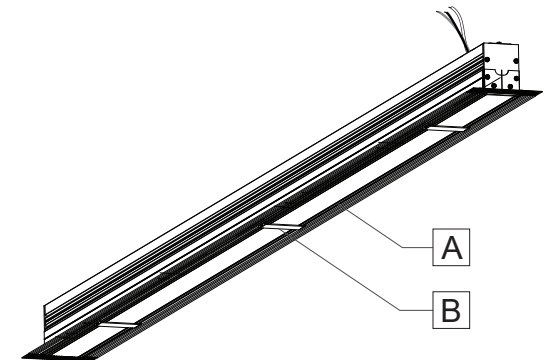

#### 3 MAKE ELECTRICAL CONNECTIONS.


Remove the power plate [E] from the fixture [A]. Install power cable [C] (by others) through the BX connector [D] (by others) and install onto the power plate [E] provided. Make electrical connections between power cable [C] and fixture cable using wire nuts [F]. Reinstall the power plate [E] to the fixture [A]. Number of wires may vary.

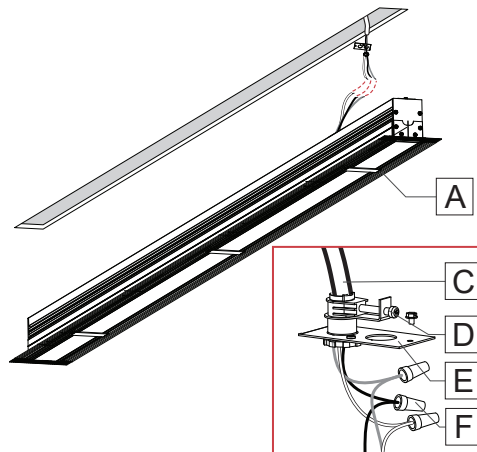

#### 4 INSTALL THE FIXTURE.


Insert the fixture into the pre-cut hole in the drywall and fasten drywall screws [G] through the obround holes of the flanges [H].

To reinforce the drywall screws [G] wood blocking [I] or drywall anchors [J] must be used.

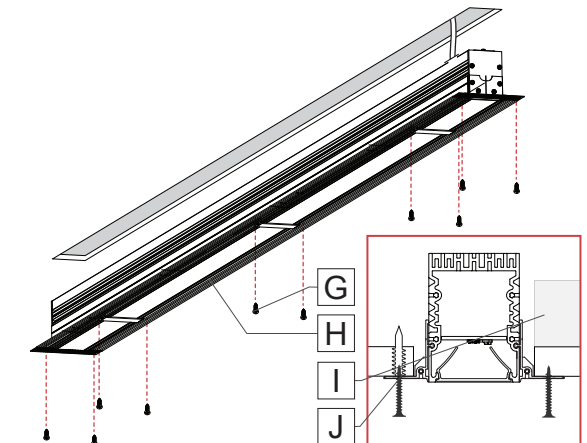


### 5 ADJUST THE FIXTURE IN PLACE.

If the fixture position needs adjustments, remove screws [G] on one side of the fixture [A] and adjust it. Reinstall the screws once the position is settled.

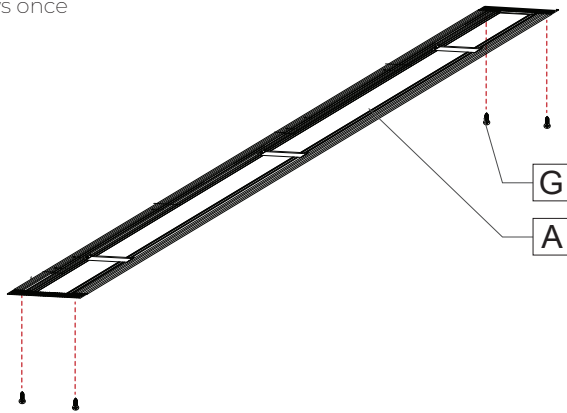


### 6 REMOVE THE TEMPORARY BRACKETS.

Once the fixture is attached to the ceiling, remove the temporary brackets [B].

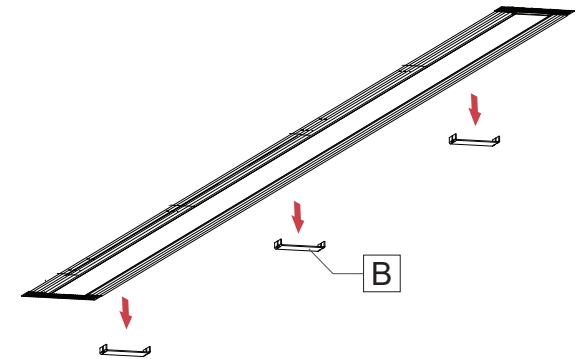


### 7 PLASTER OVER MUD FLANGE.

Plaster and sand over mud flange [H] to create a smooth finish.

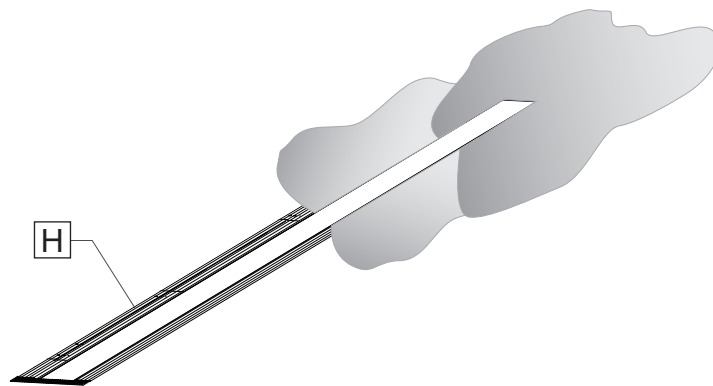

### 8 REMOVE THE COVER.

Once the mud is totally dry and painted, gently remove the cover.

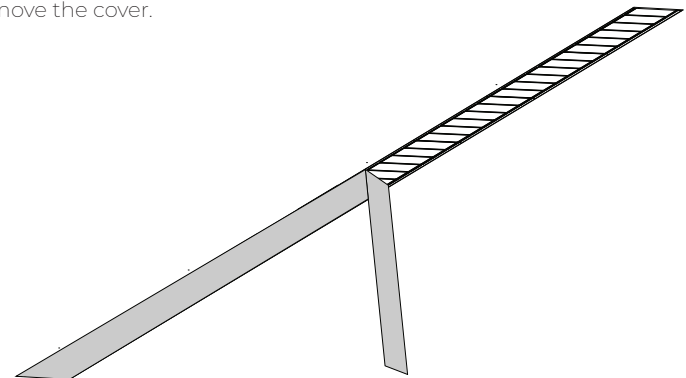


### CONTINUOUS RUN

**1** FOR CONTINUOUS RUN, REPEAT STEPS **1 - 5** FROM THE SINGLE FIXTURE SECTION FOR THE FIRST FIXTURE IN THE RUN, THEN:



**2** MAKE ELECTRICAL CONNECTIONS.

Make the wire connections between the first two sections [A] and [K] using quick connectors [L]. Insert the second section [K] into the drywall hole. Number of wires may vary.

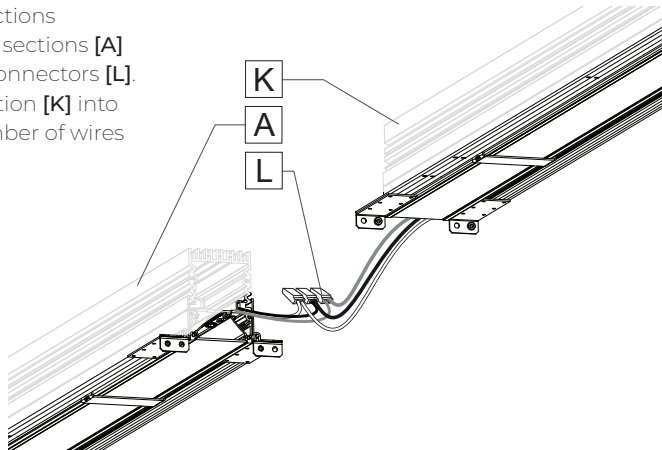


**3** JOIN THE FIXTURES.

Slide the fixture [K] to the fixture [A]. Attach the two fixtures by fastening the screws on the joiners [M].

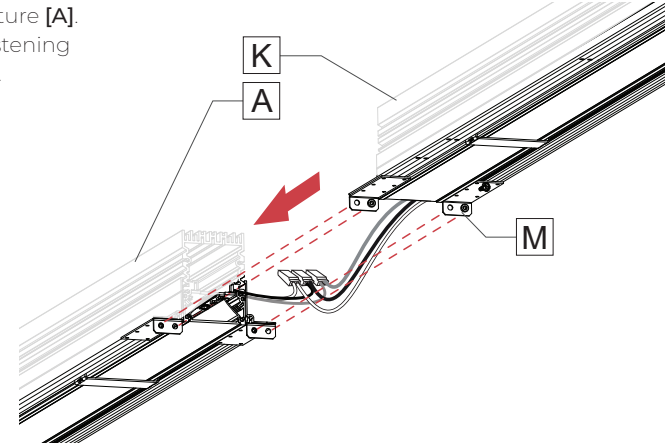


**4** FASTEN THE FIXTURE.

Secure the fixture to the ceiling by fastening drywall screws [G] through the flanges into anchors [J] or wood blocking [I].

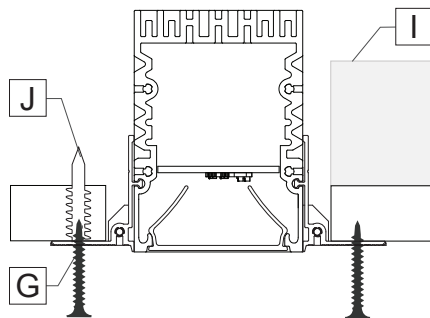


**5** REMOVE THE BRACKETS.

Once the fixture is attached to the ceiling, remove the temporary brackets [B] and the joiners [M].

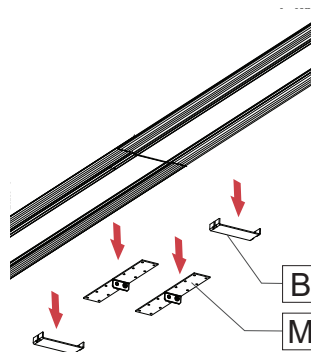

**6** PLASTER OVER MUD FLANGE.

Plaster and sand over mud flange [H] to create a smooth finish.

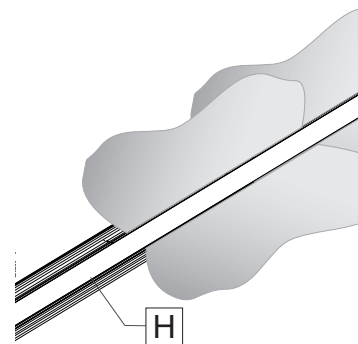

**7** REMOVE THE COVER.

Once the mud is totally dry and painted, gently remove the cover.

