

# LUMENWERX


## VIA ACOUSTIX SPOKE Pendant




**CABLE**





**STEM**

 This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

 Wire dimming conductors as Class 1.

 A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

 Images are shown with Via 1.5 Acoustix Spoke, and apply to Via 2 Acoustix Spoke.

# VIA ACOUSTIX SPOKE

## Pendant

LUMENWERX


### CABLE

#### 1 MAKE ELECTRICAL CONNECTIONS TO THE MAIN POWER.

Locate ceiling mounting points according to supplied client drawing. Make a knot in the power cord [A] and then connect it to the ceiling power feed.

**NOTE:** Number of wires may vary.

**Warning:** A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

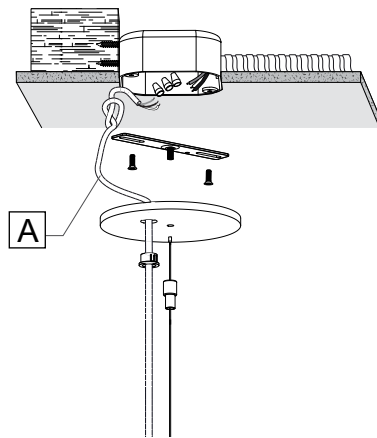


#### 2 INSTALL ALL OF THE CANOPIES.

##### POWER SIDE

Secure canopy [B] with slip ring [C] on threaded rod [D].

##### NON-POWER SIDE

Secure canopy [E] with cable coupler [F] on threaded rod (1/4"-20) [G] (by others).

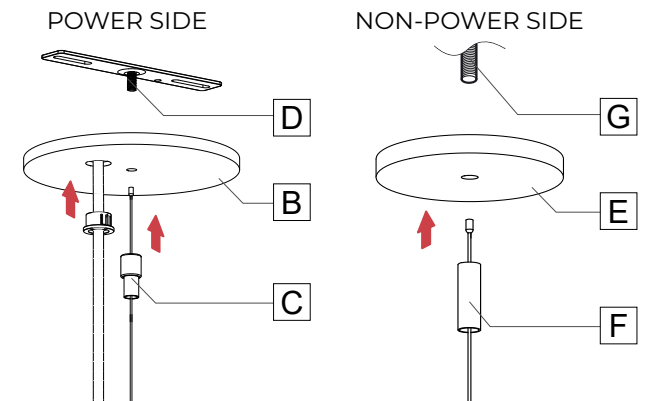


#### 3 INSTALL AIRCRAFT CABLES.

Insert the aircraft cable [H] into the griplock [I]. Adjust the aircraft cable [H] length by pushing the feeder tube [J].

Cut the excess cable with an aircraft cable cutter [K].

Secure power cord [A] to aircraft cable [H] with plastic clip [L].

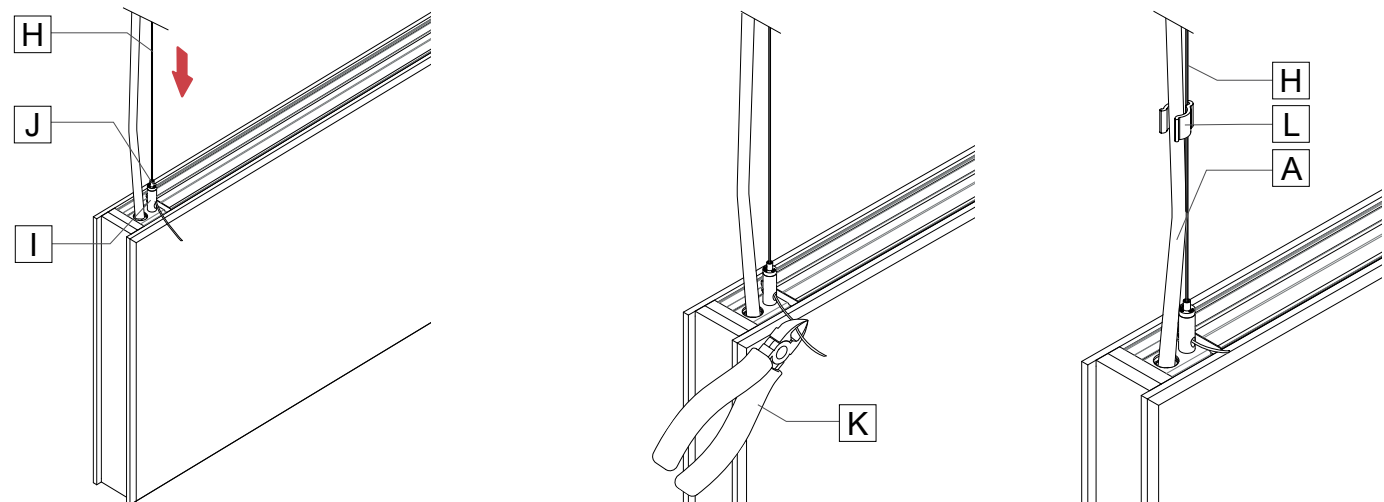

# VIA ACOUSTIX SPOKE

## Pendant

LUMENWERX

### STEM

## 1 INSTALL THE STEMS TO THE CANOPIES.


Slide the slip ring [A] and the canopy [B] onto the stem [C] and leave some space. Screw the junction box crossbar [D] onto the stem [C].

### EMERGENCY CIRCUIT

In the case where an emergency circuit is required, the emergency circuit wire [E] will be passed through a second stem [F].


### GRID CEILING

In the case where the luminaire is installed on a grid ceiling, the power cable [G] will pass outside of the stem [C].

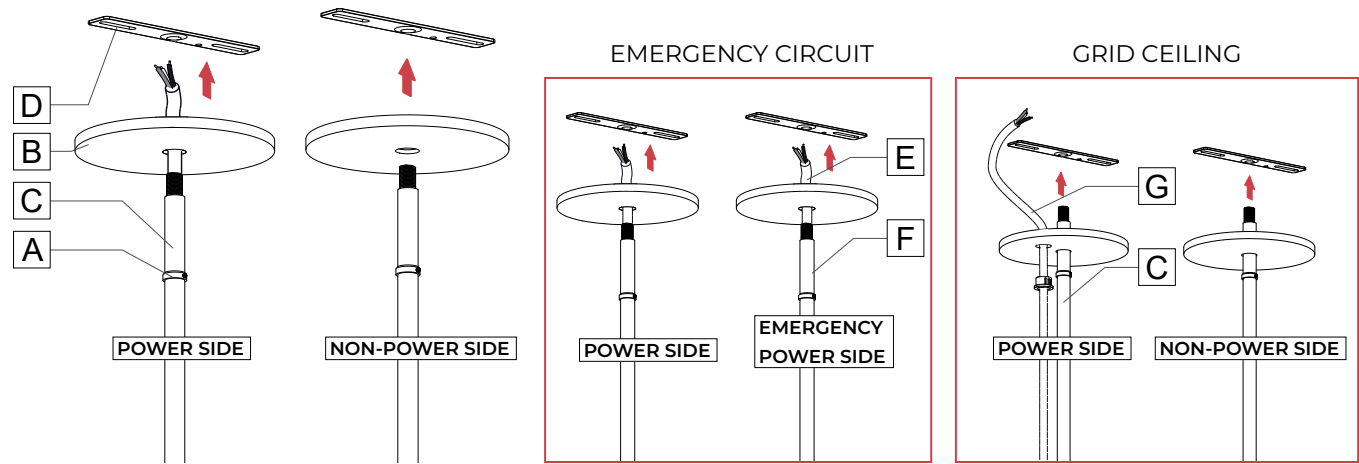

## 2 INSTALL THE STEMS ON THE FIXTURE.

Screw the stems [C] on the fixture [H].

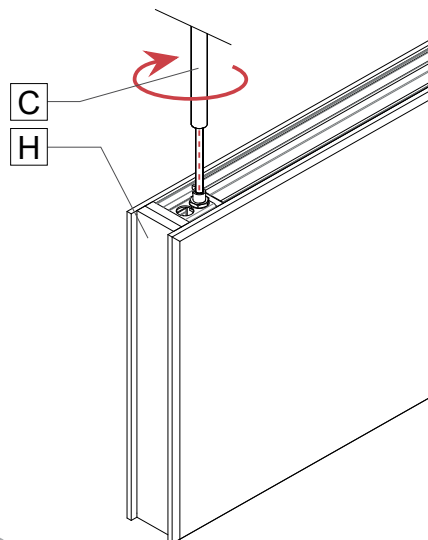

## 3 INSTALL THE FIXTURE TO THE CEILING.

Raise the fixture and tighten the junction box crossbar [D] with screws [I] (by others) to the junction box [J].

For **POWER SIDE** canopies, make wire connection to the main power [K] with wire nuts [L].

Slide the canopy [B] up and tighten with the slip ring [A].

**Warning:** A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

