



**NOTE: Wire dimming conductors as Class 1**

### 1 SINGLE FIXTURE

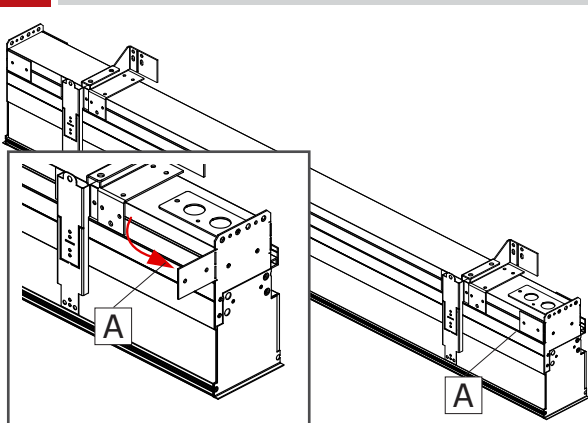


Bend the tabs (A) on the end of the fixture. For a continuous system, leave tabs close. **Cartridge illustration may vary.**

### 2

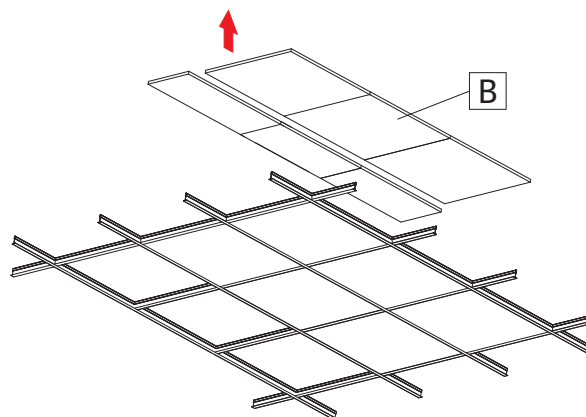


Remove ceiling tiles (B) where the fixture will be installed as well as the adjacent tiles for easy access during installation.

### 3

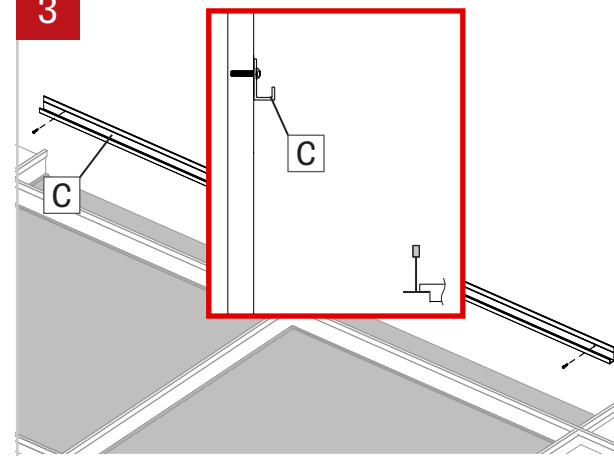


Locate J-Bar (C) position using provided client drawing. Install J-Bar (C) to wall. Align with structural stud or use drywall anchors when needed.

### 4 SIDE VIEW

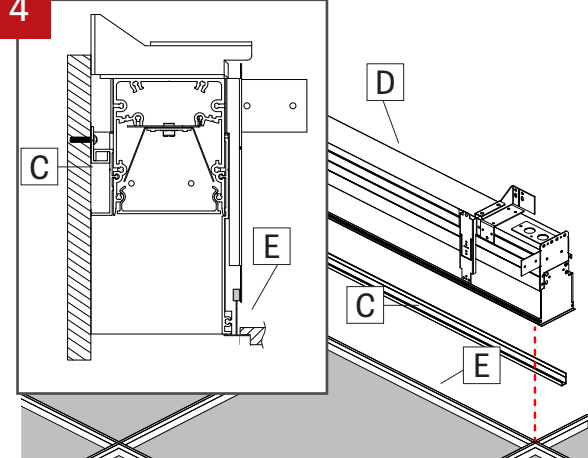


Raise the fixture above the ceiling and lower the fixture (D) onto the T-bars (E) and the J-Bar (C), adjustable of 1/4". **Please install the fixture's flange above the tile.**

### 5

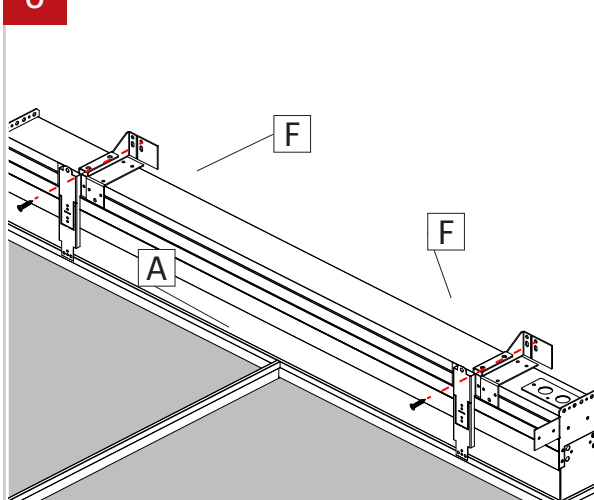


Screw every wall brackets (F) to the wall.

### 6

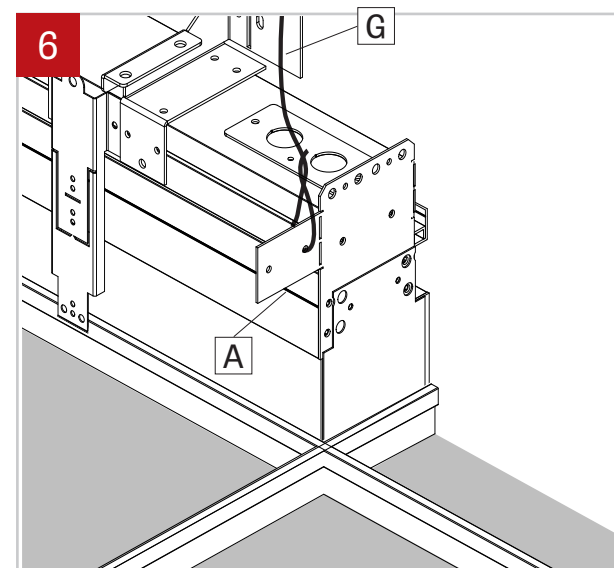


Safety wires (G) should be attached to the tabs (A).

7

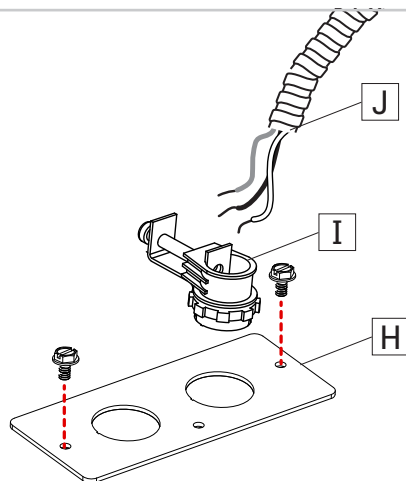


Remove power plate (H) from fixture and install BX connector (I) (by other) and BX cable (J) (by other) through the power plate. Tighten BX connector (I) screw.

8

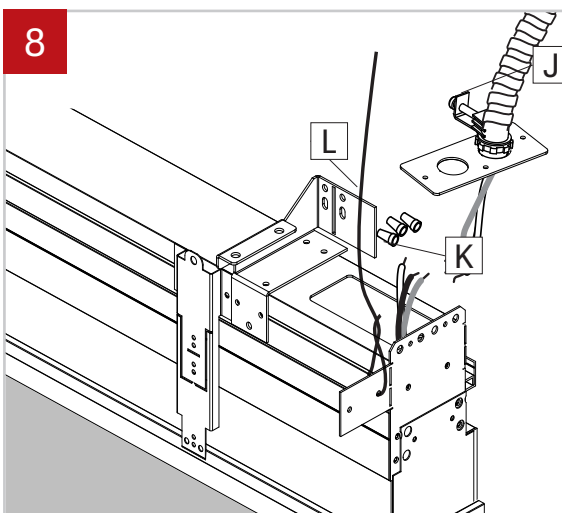

Connect cables from the BX cable (J) to the driver wires (K) using wire nuts (L). Numbers of wires may vary.


9

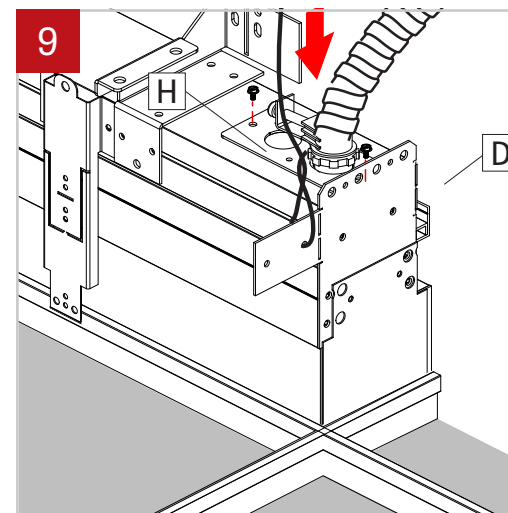

Push connected wires inside the fixture. Reinstall power plate (H) onto fixture (D) by refastening screws to power plate (H) and fixture (D).


10

### CONTINUOUS SYSTEM

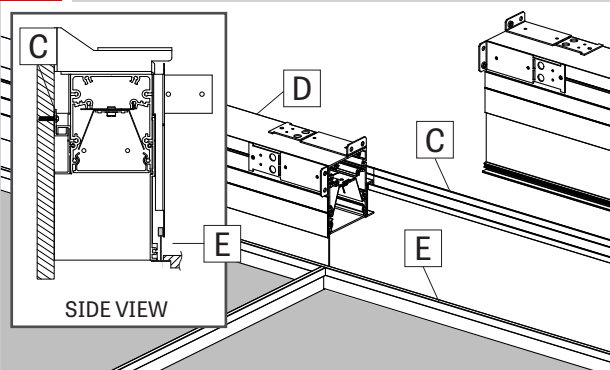


For a continuous system, repeat steps 2 and 3 then raise the first fixture (D) in the run above the ceiling and lower onto the T-bars (E) and the J-Bar (C), adjustable of 1/4". Repeat for the second fixture. **Please install the fixture's flange above the tile. Cartridge illustration may vary.**

11

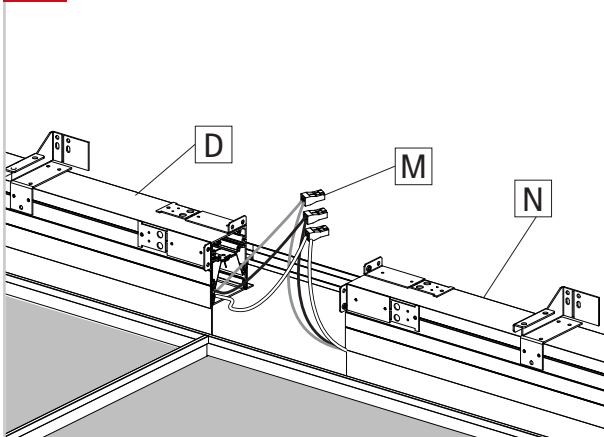


Make wire connection with wire connectors (M) between the two fixtures (D) and (N). Numbers of wires may vary.

12

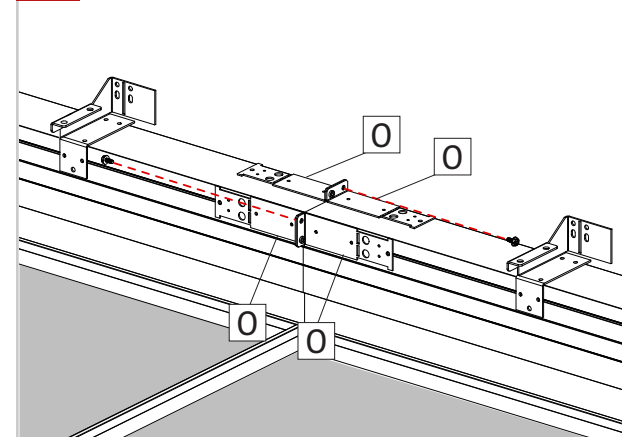


Slide the four fixture brackets (O) and attach them with screws. Repeat for all fixtures in the run.

13

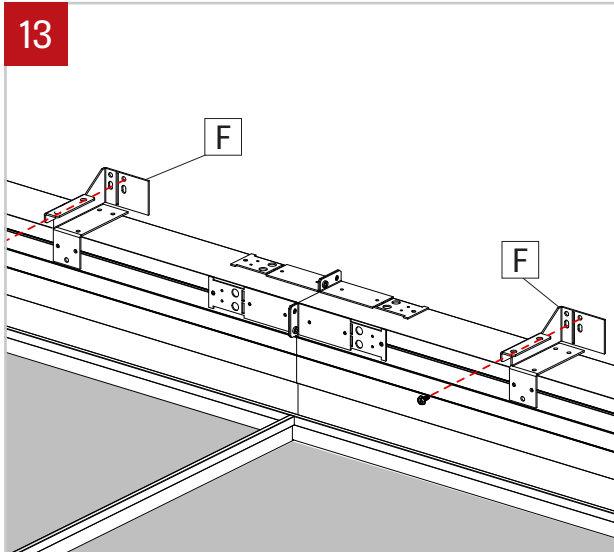

Screw every wall brackets (F) to the wall.

14

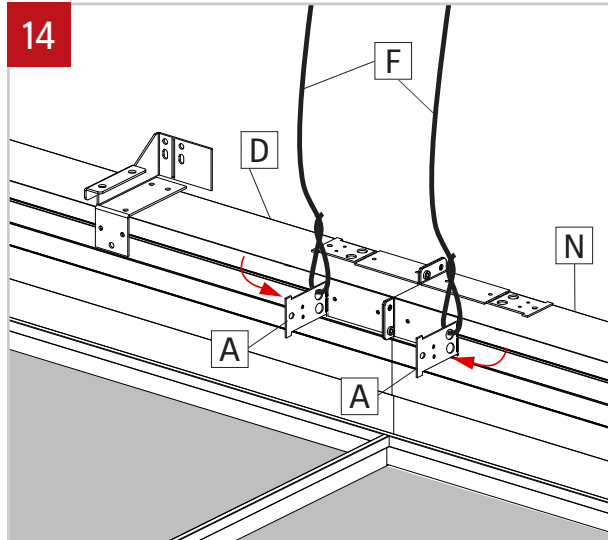

Bend the tabs (A) on the ends of the fixtures (D) and (N), attach safety wires (F) to them.