


IMPORTANT: Applicable to Indirect and Direct / Indirect



Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

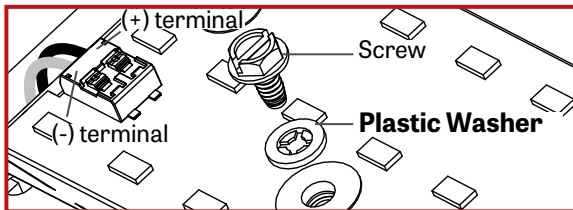


This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. la mise à terre électrique est obligatoire pour la sécurité.

NOTE: Wire dimming conductors as Class 1

1


SINGLE FIXTURE

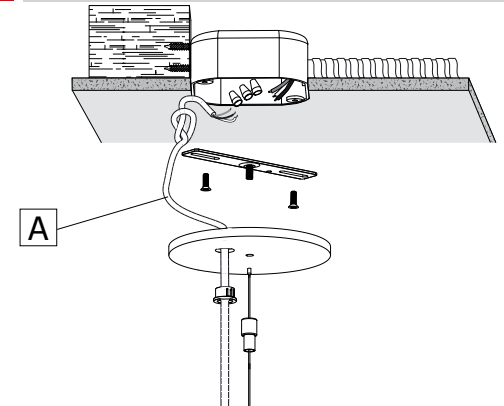

Locate ceiling mounting points according to supplied client drawing. Make a knot in the power cord (A) and then connect it to the ceiling power feed. **Warning : Power must come from Single branch circuit.**

2


POWER SIDE

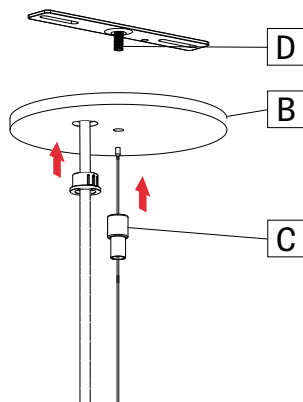

Secure canopy (B) with slip ring (C) on threaded rod (D).


3

NON-POWER SIDE

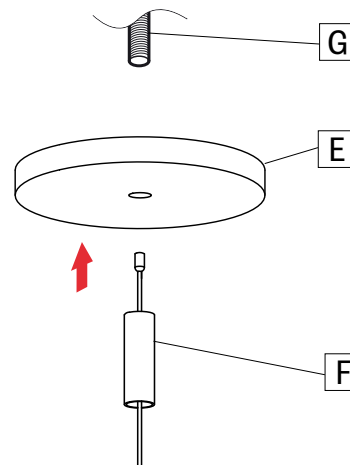


Secure canopy (E) with cable coupler (F) on crimp strud (1/4\"-20) (G) (by other).

4

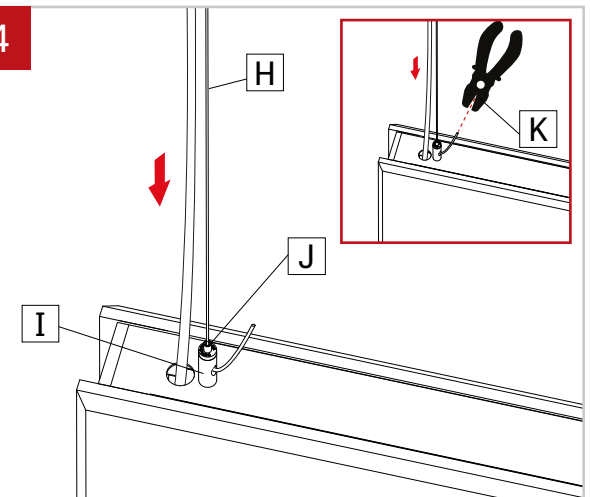

Insert the aircraft cable (H) into the griplock (I). Adjust the cable (H) length by pushing the feeder tube (J) and **cut the excess cable** with an aircraft cable cutter (K).


5

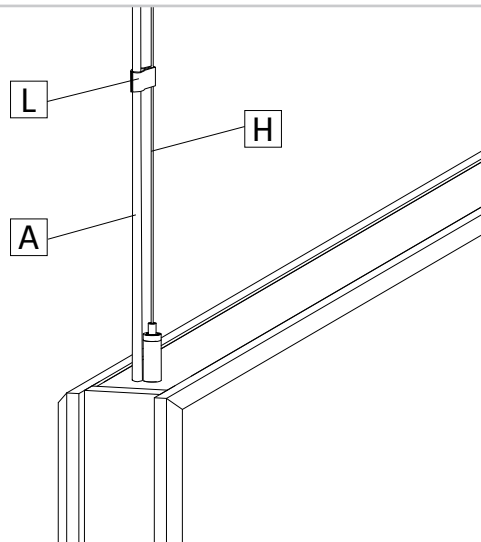

Secure power cord (A) to aircraft cable (H) with plastic clip (L).


6

CONTINUOUS SYSTEM

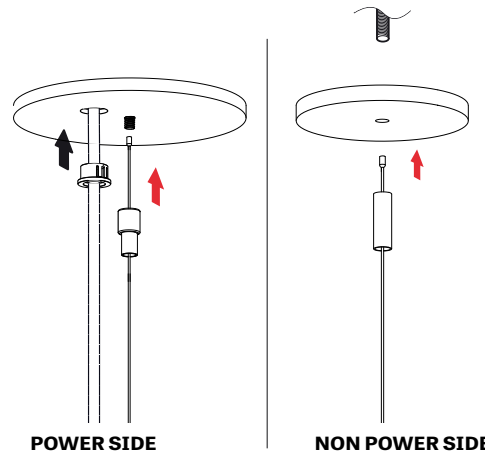


For a continuous system, repeat steps 1 to 3 for all mounting.

7

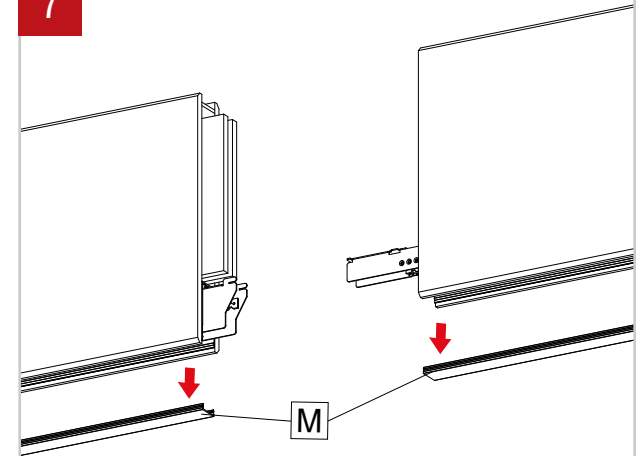


Remove the lenses (M) with the included lens tool.

8

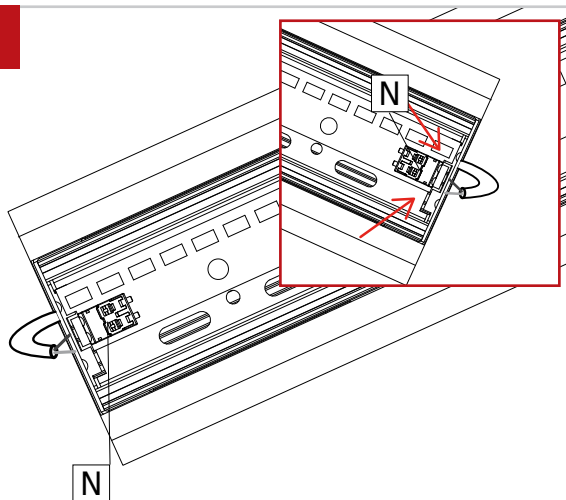


Disconnect LED mox connector (N) on both sides by taking a pointed object and pressing on the two tabs on the top.

9

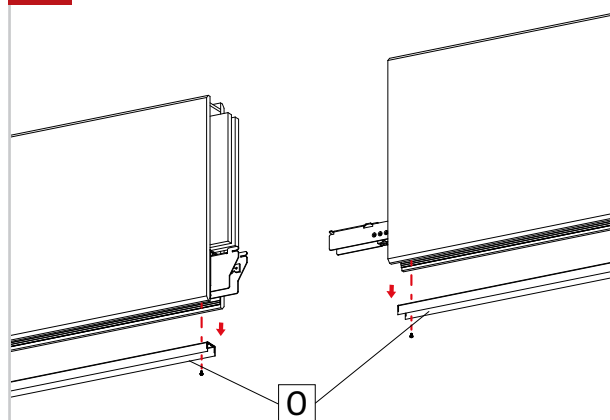

Remove all the end LED cartridges (O). Repeat steps 7 to 9 to all fixtures in the run.

10

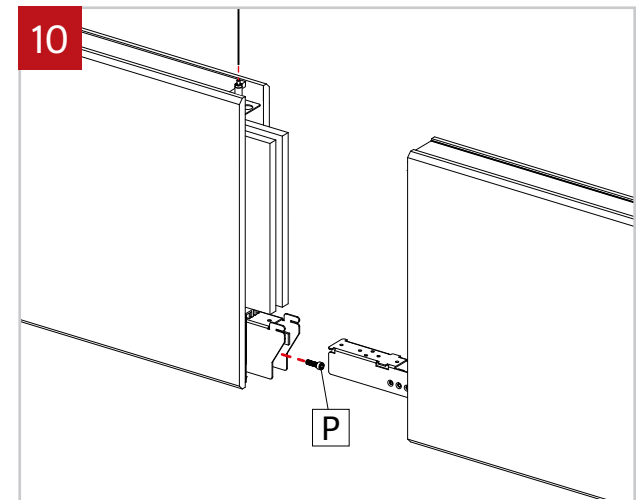

Install the aircraft cables on the first fixture. Then install it on the second fixture (as shown in steps 4 and 5). Remove the screw (P) on the joiner and put it in a safe place.

