



NOTE: Wire dimming conductors as Class 1


1 SINGLE FIXTURE

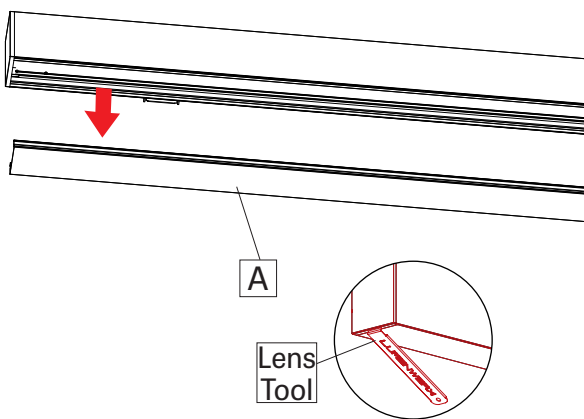


Remove lens (A) with the included lens tool from all fixtures.

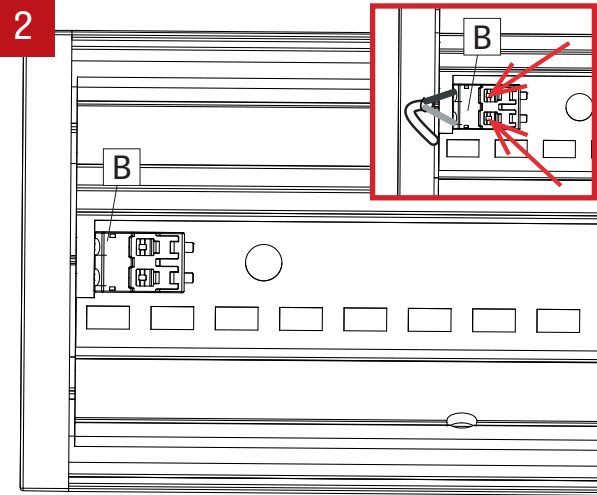


Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

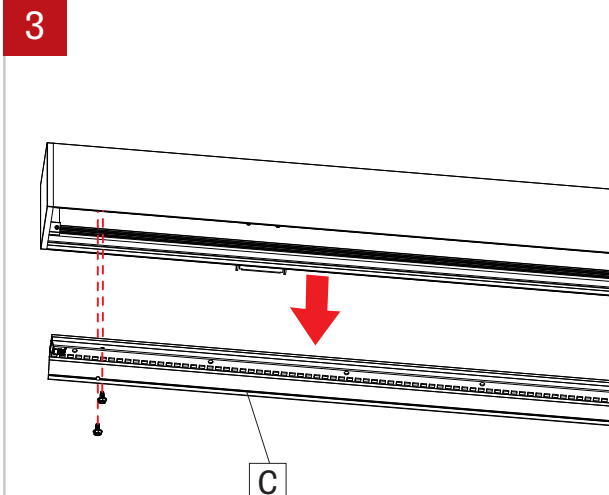


Remove cartridges (C) from all fixtures.

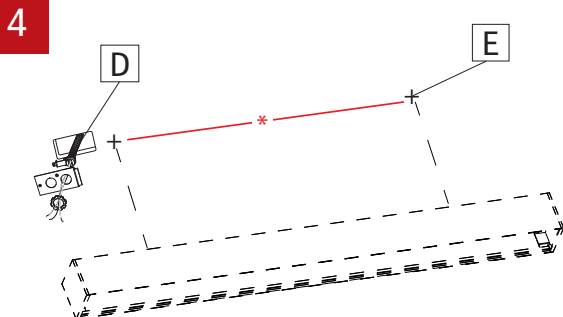

Locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions supplied in client drawings.

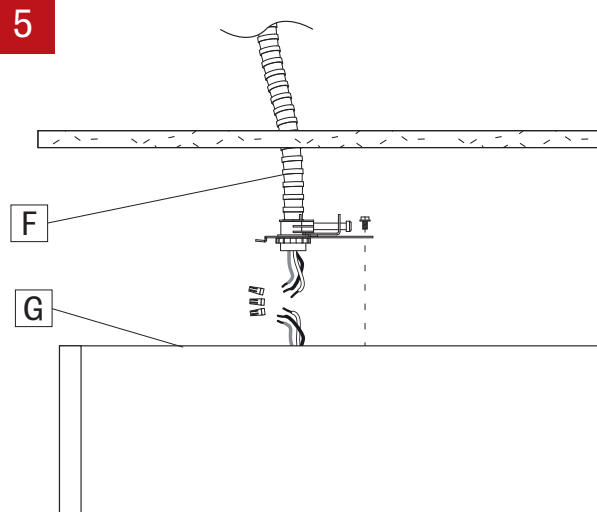


Make electrical connections between main power (F) and fixture (G). **Number of wires may vary.**

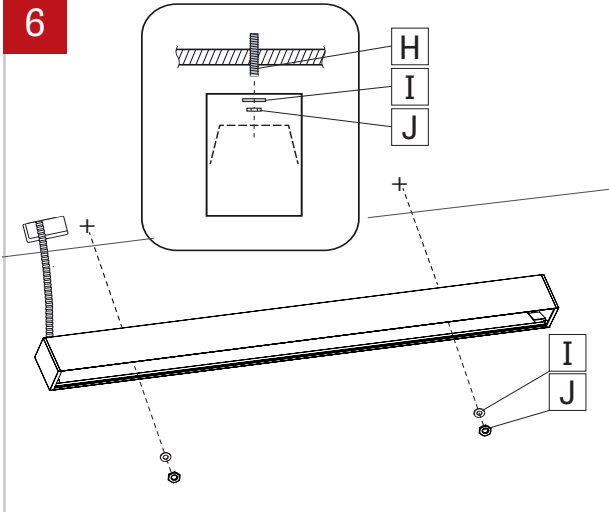


Fasten fixture to threaded stud (H) using washer (I) and nuts (J).

7

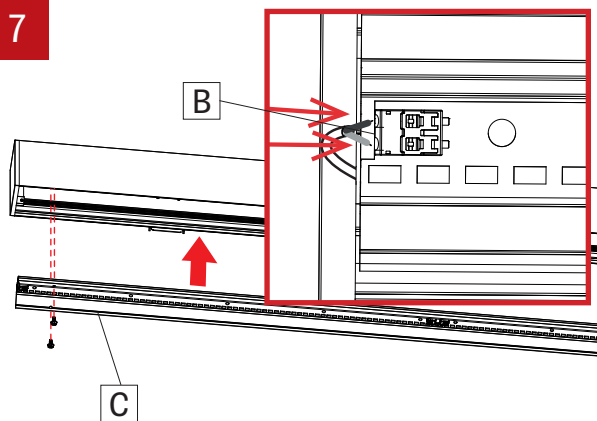

Reinstall the cartridge(s) (C) and reconnect the LED molex connector (B). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place.


8

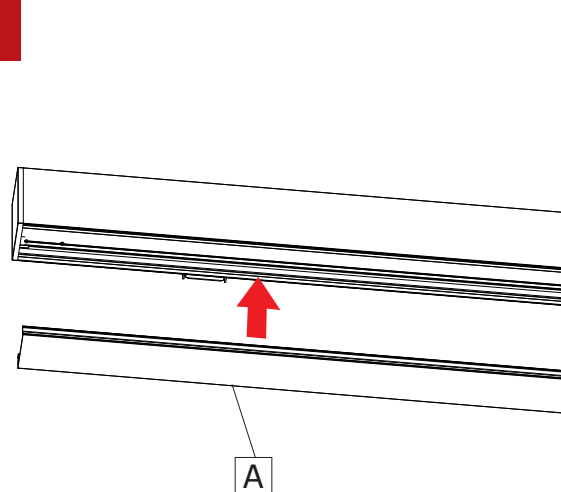

Reinstall the lenses (A).


9

CONTINUOUS SYSTEM

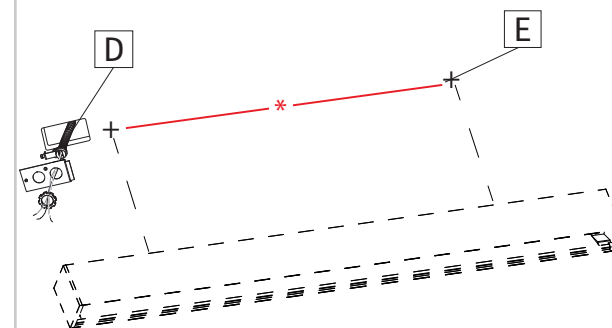


For a continuous system, locate junction box (D) and mounting points (E) in the ceiling. Refer to dimensions [*] supplied in client drawings.

10

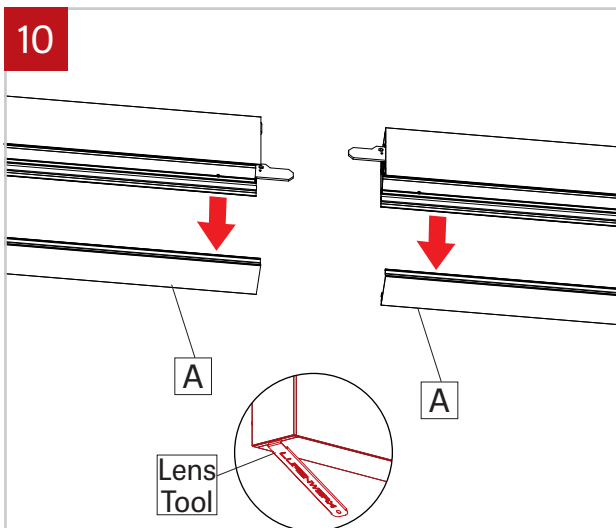


Remove the lenses (A) from all the fixtures in the run.

11

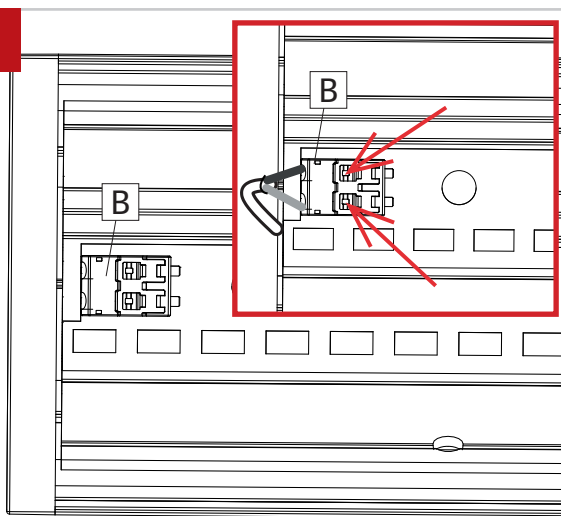


Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

12

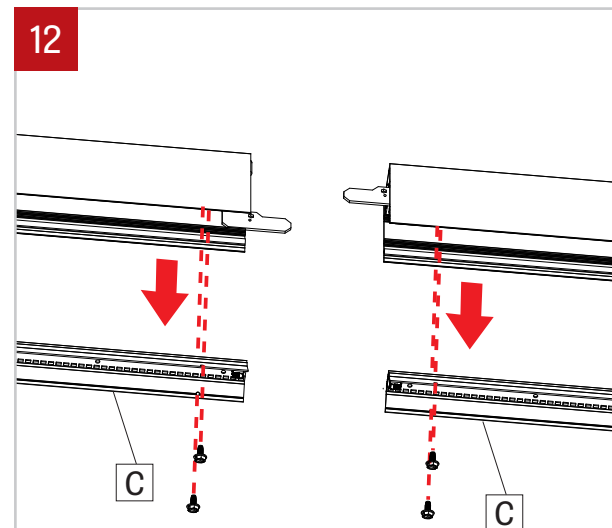


Remove all the end LED cartridges (C).

13

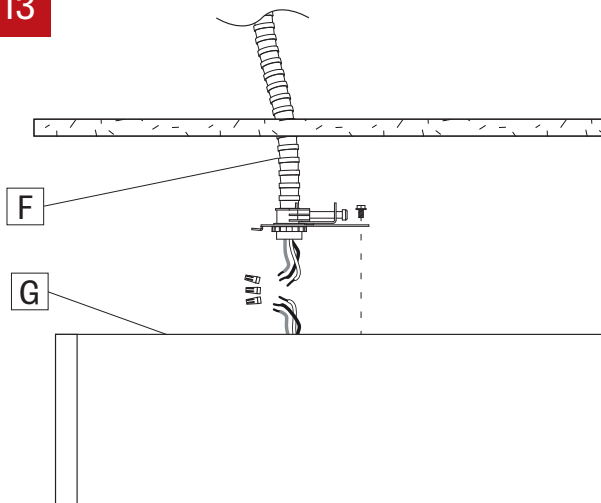


Make electrical connections between the first fixture (G) and main power (F). **Number of wires may vary.**

14

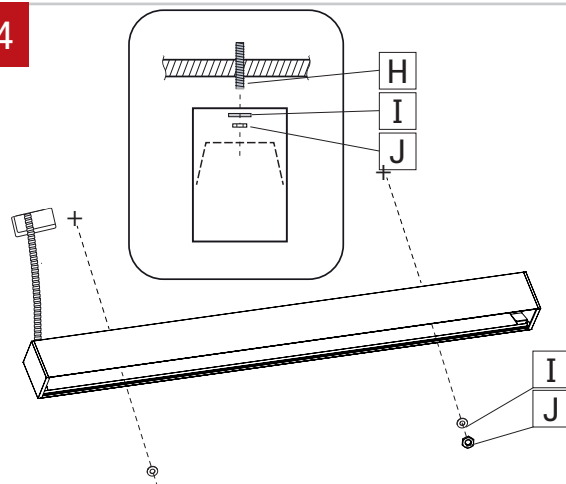


Fasten the first fixture to threaded stud (H) using washers (I) and nuts (J). **(If there's no threaded stud present, the fixture can be screwed directly onto the ceiling).**

15

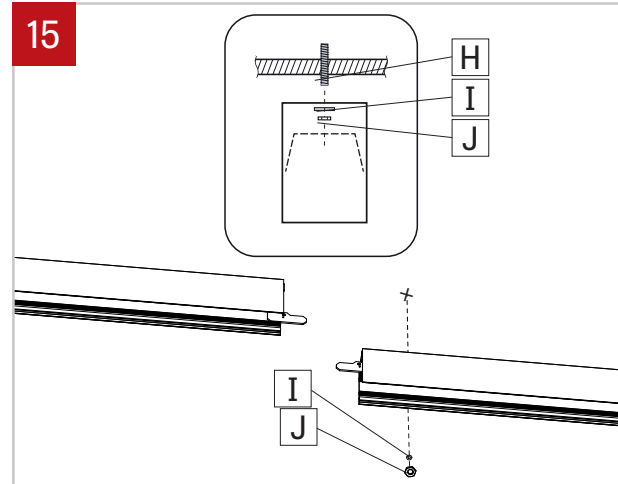


Locate mounting points of the second fixture and install the fixture. Fasten the second fixture to threaded stud (H) using washers (I) and nuts (J) without overtighten.

16

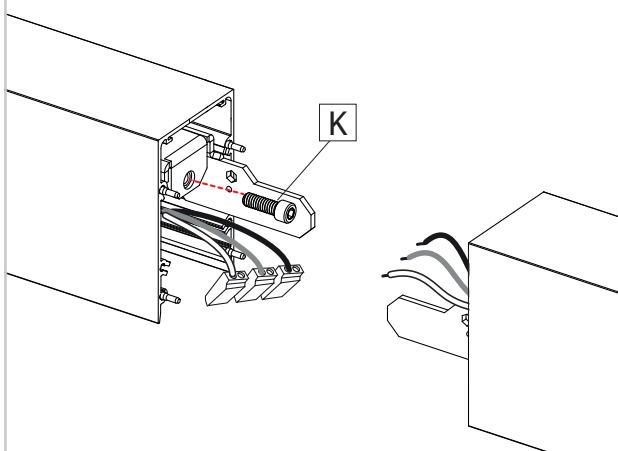


Remove the screw (K) on the joiner and put it in a safe place.

17

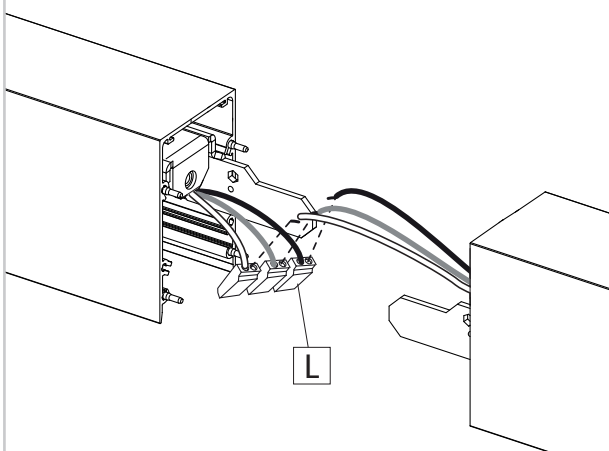

Connect wires between joining fixture using quick connectors (L). Push wires inside second fixture. **Number of wires may vary.**

18

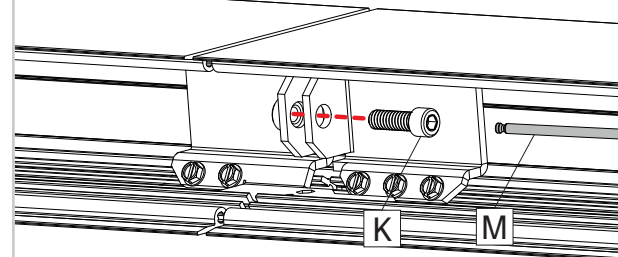

Join fixtures using align pins as guide. Put back in place the provided screw (K) (using 3/16" Ball-End Screwdriver (M) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (K) to pull the extrusions together. Repeat steps 16 to 18 for all other fixture. Then tighten all washers and nuts on threaded studs to secure the fixtures.

