

# MINI PIVOT MODULE



DUET



BLANK

HLO

PRISM

DOT

BRIDGE

SOLO



TAB ACOUSTIX



CARET



GLOBE



DOT CYLINDER



PETITE CYLINDER

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT HLO




### DESCRIPTION

The Mini Pivot HLO module represents a premium everyday solution with its understated elegance and distribution of clean, uniform light and smooth beam edges.


### Order Guide

LUMINAIRE ID	LENGTH	LIGHT SOURCE	CRI	LUMEN PACKAGE	COLOR TEMP.	MODULE FINISH
<b>MIPIVHLO</b>						
<b>MIPIVHLO</b> - Mini Pivot HLO	<b>1FT</b> - 1' <b>2FT</b> - 2' <b>3FT</b> - 3' <b>4FT</b> - 4'	<b>SW</b> - Static white <b>FS</b> - Full spectrum	<b>80CRI</b> <sup>1</sup> - 80 CRI <b>90CRI</b> <sup>1</sup> - 90 CRI <b>95CRI</b> - 95 CRI  <sup>1</sup> Not available with full spectrum.	<b>300LMF</b> - 300 lm/ft <b>450LMF</b> - 450 lm/ft <b>600LMF</b> - 600 lm/ft	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#

### Dimensions




MIPIVHLO - Mini Pivot HLO

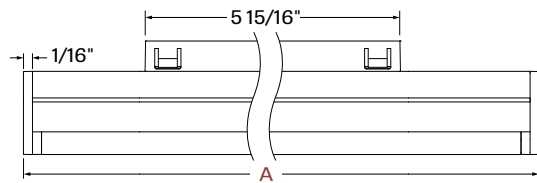

MIPIVHLO - Mini Pivot HLO - Side view

NOMINAL LENGTH	A		WEIGHT	
	TOTAL LENGTH			
1FT	11 13/16"		0.2 lb	0.1 kg
2FT	23 13/16"		0.4 lb	0.2 kg
3FT	35 7/16"		0.7 lb	0.3 kg
4FT	46 7/16"		0.9 lb	0.4 kg

### Photometrics



#### Module Wattage (W)

NOMINAL LENGTH	LUMEN PACKAGE at 35K/80 CRI		
	300	450	600
1FT	4.0	5.9	8.0
2FT	7.8	11.1	14.7
3FT	11.0	16.6	22.7
4FT	14.4	22.2	29.5

#### Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.96	0.81	0.80
3000	0.99	0.83	0.83
3500	1.00	0.85	0.84
4000	1.03	0.87	0.86


# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT PRISM

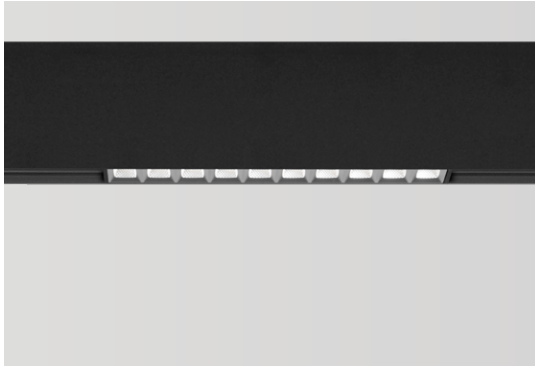

### DESCRIPTION

The Mini Pivot Prism module, equipped with our Diamond Prism Optic (DPO), emits a luxurious quality of light, soft and low-glare, wrapping around subjects with subtle graduated shadows.


### Order Guide

LUMINAIRE ID	LENGTH	OPTIC	LIGHT SOURCE	CRI
<b>MIPIVPR</b>				
<b>MIPIVPR</b> - Mini Pivot Prism	<b>7IN</b> - 7" (1X10) <b>14IN</b> - 14" (1X20) <b>28IN</b> - 28" (1X40)	<b>PDPO</b> - Precision Specular Diamond Prism Optic <b>BDPO</b> - Matte Black Diamond Prism Optic <b>GDPO</b> - Graphite Diamond Prism Optic	<b>SW</b> - Static white <b>FS</b> - Full spectrum	<b>80CRI</b> <sup>1</sup> - 80 CRI <b>90CRI</b> <sup>1</sup> - 90 CRI <b>95CRI</b> <sup>2</sup> - 95 CRI


<sup>1</sup>Not available with full spectrum.  
<sup>2</sup>Available with full spectrum only.

LUMEN PACKAGE										COLOR TEMP.	MODULE FINISH
	7" (1X10)			14" (1X20)			28" (1X40)			<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#
	Low	Medium	High	Low	Medium	High	Low	Medium	High		
PDPO	<b>375LM</b>	<b>550LM</b>	<b>850LM</b>	<b>750LM</b>	<b>1100LM</b>	<b>1700LM</b>	<b>1500LM</b>	<b>2200LM</b>	<b>3400LM</b>		
BDPO	<b>375LM</b>	<b>550LM</b>	<b>X</b>	<b>750LM</b>	<b>1100LM</b>	<b>X</b>	<b>1500LM</b>	<b>2200LM</b>	<b>X</b>		
GDPO	<b>375LM</b>	<b>550LM</b>	<b>750LM</b>	<b>750LM</b>	<b>1100LM</b>	<b>1500LM</b>	<b>1500LM</b>	<b>2200LM</b>	<b>3000LM</b>		

### Dimensions



MIPIVPR - Mini Pivot Prism

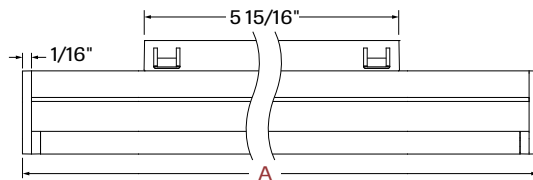

MIPIVPR - Mini Pivot Prism - Side view

NOMINAL LENGTH	A		WEIGHT	
	TOTAL			
7IN	6 13/16"		0.13 lb	0.06 kg
14IN	13 7/16"		0.26 lb	0.12 kg
28IN	26 3/4"		0.53 lb	0.24 kg




# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## Photometrics



**PDPO -**  
Precision Specular Diamond Prism Optic

**BDPO -**  
Matte Black Diamond Prism Optic

**GDPO -**  
Graphite Diamond Prism Optic

### Module Wattage (W) - PDPO

NOMINAL LENGTH	LUMEN PACKAGE at 35K/90 CRI	WATTAGE
7IN (1X10)	375	3.3 W
	550	5.1 W
	850	8.4 W
14IN (1X20)	750	6.6 W
	1100	10.1 W
	1700	16.9 W
28IN (1X40)	1500	13.1 W
	2200	20.2 W
	3400	33.8 W

### Module Wattage (W) - BDPO

NOMINAL LENGTH	LUMEN PACKAGE at 35K/90 CRI	WATTAGE
7IN (1X10)	375	6.9 W
	550	10.1 W
	850	16.9 W
14IN (1X20)	750	13.9 W
	1100	20.2 W
	1700	33.8 W
28IN (1X40)	1500	27.7 W
	2200	40.4 W
	3400	63.7 W

### Module Wattage (W) - GDPO

NOMINAL LENGTH	LUMEN PACKAGE at 35K/90CRI	WATTAGE
7IN (1X10)	375	5.0 W
	550	6.9 W
	750	10.1 W
14IN (1X20)	750	9.5 W
	1100	13.9 W
	1500	20.2 W
28IN (1X40)	1500	18.9 W
	2200	27.7 W
	3000	40.4 W

## Multiplier - CCT/CRI

CCT (K)	Lumens	
	CR180	CR190
2700	1.08	0.94
3000	1.12	0.98
3500	1.12	1.00
4000	1.13	1.02

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT SOLO




### DESCRIPTION

The Mini Pivot Solo module highlights separate elements in a space, and in the process, creates a dynamic, harmonious, and aesthetically pleasing atmosphere.


### Order Guide

LUMINAIRE ID <sup>1</sup>	LIGHT SOURCE	BEAM	CRI	LUMEN PACKAGE	COLOR TEMP.	MODULE FINISH
<b>MIPIVSOLO</b>	<b>SW</b>			<b>350LM</b>		
<b>MIPIVSOLO</b> - Mini Pivot Solo <small><sup>1</sup>Up to 95° tilt, 355° rotation.</small>	<b>SW</b> - Static white	<b>25DEG</b> - 25° Spot <b>35DEG</b> - 35° Narrow flood <b>45DEG</b> - 45° Flood	<b>80CRI</b> - 80 CRI <b>90CRI</b> - 90 CRI	<b>350LM</b> - 350 lm, 5.2 W	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#

### DIMENSIONS



MIPIVSOLO - Mini Pivot Solo




Up to 95° tilt


### WEIGHT

0.33 lb	0.15 kg
---------	---------


### Photometrics



**25DEG** - 25° Spot



**35DEG** - 35° Narrow Flood



**45DEG** - 45° Flood

### Module Wattage (W)

LUMEN PACKAGE at 35K/80 CRI	WATTAGE
350	5.2 W

### Multiplier - CCT/CRI

CCT (K)	Lumens	
	CRI80	CRI90
2700	0.93	0.81
3000	1.00	0.86
3500	1.00	0.86
4000	1.08	0.86

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT DUET




### DESCRIPTION

Mini Pivot Duet, a point source module with twin track heads, allows for lighting in two directions simultaneously with each track head able to tilt up to 70 degrees.


### Order Guide

LUMINAIRE ID <sup>1</sup>	LIGHT SOURCE	BEAM	CRI	LUMEN PACKAGE	COLOR TEMP.	MODULE FINISH
<b>MIPIVDUET</b>	<b>SW</b>			<b>700LM</b>		
<b>MIPIVDUET</b> - Mini Pivot Duet <small><sup>1</sup> Up to 70° tilt per head, 355° rotation.</small>	<b>SW</b> - Static white	<b>25DEG</b> - 25° Spot <b>35DEG</b> - 35° Narrow flood <b>45DEG</b> - 45° Flood	<b>80CRI</b> - 80 CRI <b>90CRI</b> - 90 CRI	<b>700LM</b> - 700 lm, 10.5 W (350 lm per head)	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#


### DIMENSIONS



MIPIVDUET - Mini Pivot Duet



MIPIVDUET - Mini Pivot Duet - Bottom view




Up to 70° tilt per head


#### WEIGHT

0.55 lb | 0.25 kg


### Photometrics



25DEG - 25° Spot



35DEG - 35° Narrow flood



45DEG - 45° Flood

#### Module Wattage (W)

LUMEN PACKAGE at 35K/80 CRI	WATTAGE
700	10.5 W

#### Multiplier - CCT/CRI

CCT (K)	Lumens	
	CRI80	CRI90
2700	0.93	0.81
3000	1.00	0.86
3500	1.00	0.86
4000	1.08	0.86

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT DOT



### DESCRIPTION

Mini Pivot Dot modules are individual mounting systems that can be used on their own as single lighting fixtures or as part of a broader design within the Mini Pivot track system.

### Order Guide

LUMINAIRE ID <sup>1</sup>	HEIGHT	LIGHT SOURCE	BEAM	CRI	LUMEN PACKAGE <sup>3</sup>			COLOR TEMP.
<b>MIPIV1DT</b> - Mini Pivot 1.5" Dot <b>MIPIV2DT</b> - Mini Pivot 2" Dot	2.65IN - 2.65"	<b>SW</b> - Static white <b>FS</b> - Full spectrum	<b>20DEG</b> - 20° Spot <b>35DEG</b> - 35° Narrow flood <b>50DEG</b> - 50° Wide flood	<b>80CRI</b> <sup>2</sup> - 80 CRI <b>90CRI</b> <sup>2</sup> - 90 CRI <b>95CRI</b> - 95 CRI	1.5"		2"	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K
	4IN - 4"				2.65" height	<b>700LM</b> - 700 lm, 6 W	<b>750LM</b> - 750 lm, 8.2 W	
					4" height	<b>850LM</b> - 850 lm, 10 W	<b>900LM</b> - 900 lm, 12 W	

<sup>1</sup> Up to 90° tilt, 355° rotation.


<sup>2</sup> Not available with full spectrum.

<sup>3</sup> Lumen outputs are reduced with full spectrum, consult factory.


BAFFLE	BAFFLE FINISH	MODULE FINISH
<b>SDB</b> - Standard baffle <b>DCB</b> <sup>4</sup> - Decorative baffle	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL #	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#

<sup>4</sup> Recommended when a different finish is desired for the baffle.


### Photometrics



**20DEG** - 20° Spot



**35DEG** - 35° Narrow flood



**50DEG** - 50° Wide flood

### Module Wattage (W)

SIZE	HEIGHT	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
1.5IN	2.65"	700	6 W
	4"	850	10 W
2IN	2.65"	750	8.2 W
	4"	900	12 W

### Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.94	0.77	0.72
3000	0.96	0.82	0.75
3500	1.00	0.85	0.81
4000	1.02	0.87	0.79




# MINI PIVOT MODULE




Project: \_\_\_\_\_

Type: \_\_\_\_\_


## DIMENSIONS



**SDB** - Standard baffle



**DCB** - Decorative baffle



Maximum length - Up to 90° tilt

SIZE	A		B		C		D		E		WEIGHT	
	ACTUAL SIZE	CYLINDER HEIGHT	MODULE HEIGHT	TOTAL HEIGHT	MAX. LENGTH (90° tilt)							
		SDB	DCB	SDB	DCB	SDB	DCB	SDB	DCB			
1.5IN	Ø 1 11/16"	2 5/8"	2 13/16"	3 5/8"	3 13/16"	4 5/8"	4 3/4"	2 15/16"	3 1/8"	0.55 lb	0.25 kg	
		4"	4 3/16"	5"	5 3/16"	5 15/16"	6 1/8"	4 5/16"	4 7/16"	0.77 lb	0.35 kg	
2IN	Ø 2 3/16"	2 5/8"	2 13/16"	3 5/8"	3 13/16"	4 5/8"	4 3/4"	2 15/16"	3 1/8"	0.66 lb	0.3 kg	
		4"	4 3/16"	5"	5 3/16"	5 15/16"	6 1/8"	4 5/16"	4 7/16"	1.1 lb	0.5 kg	



# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT DOT CYLINDER



### DESCRIPTION

Mini Pivot Dot Cylinders are individual mounting systems that can be used on their own as single lighting fixtures or as part of a broader design within the Mini Pivot track system.

### Order Guide


LUMINAIRE ID	HEIGHT	LIGHT SOURCE	BEAM	CRI	LUMEN PACKAGE <sup>2</sup>		COLOR TEMP.
<b>MIPIV1DTCY</b> - Mini Pivot 1.5" Dot Cylinder <b>MIPIV2DTCY</b> - Mini Pivot 2" Dot Cylinder	<b>6IN</b> - 6" <b>9IN</b> - 9" <b>12IN</b> - 12" <b>18IN</b> - 18"	<b>SW</b> - Static white <b>FS</b> - Full spectrum	<b>20DEG</b> - 20° Spot <b>35DEG</b> - 35° Narrow flood <b>50DEG</b> - 50° Wide flood	<b>80CRI</b> <sup>1</sup> - 80 CRI <b>90CRI</b> <sup>1</sup> - 90 CRI <b>95CRI</b> - 95 CRI	1.5"	2"	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K
	<b>700LM</b> - 700 lm, 6 W <b>850LM</b> - 850 lm, 10 W				<b>750LM</b> - 750 lm, 8.2 W <b>900LM</b> - 900 lm, 12 W		

<sup>1</sup> Not available with full spectrum.


<sup>2</sup> Lumen outputs are reduced with full spectrum, consult factory.

BAFFLE	BAFFLE FINISH	MODULE FINISH	SUSPENSION	SUSPENSION LENGTH
<b>SDB</b> - Standard baffle <b>DCB</b> <sup>3</sup> - Decorative baffle <sup>3</sup> Recommended when a different finish is desired for the baffle.	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#	<b>PCB</b> - Black power cord <b>PCW</b> - White power cord	<b>12IN</b> - 12" <b>24IN</b> - 24" <b>36IN</b> - 36" <b>48IN</b> - 48"


### Photometrics



**20DEG** - 20° Spot



**35DEG** - 35° Narrow flood



**50DEG** - 50° Wide flood

### Module Wattage (W)

SIZE	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
1.5IN	700	6 W
	850	10 W
2IN	750	8.2 W
	900	12 W

### Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.94	0.77	0.72
3000	0.96	0.82	0.75
3500	1.00	0.85	0.81
4000	1.02	0.87	0.79




# MINI PIVOT MODULE




Project: \_\_\_\_\_

Type: \_\_\_\_\_


## DIMENSIONS

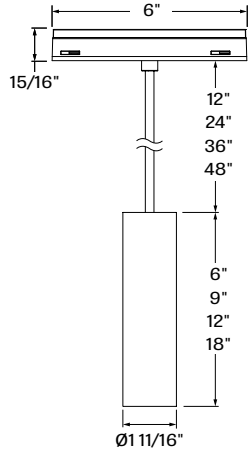


**MIPIV1DTCY** - Mini Pivot 1.5" Dot Cylinder  
- Standard baffle

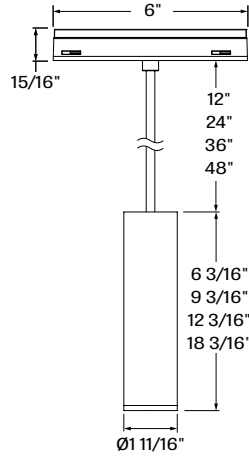

**MIPIV1DTCY** - Mini Pivot 1.5" Dot Cylinder  
- Decorative baffle

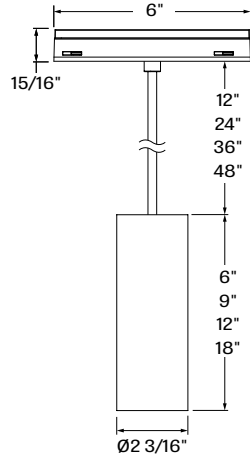

**MIPIV2DTCY** - Mini Pivot 2" Dot Cylinder  
- Standard baffle

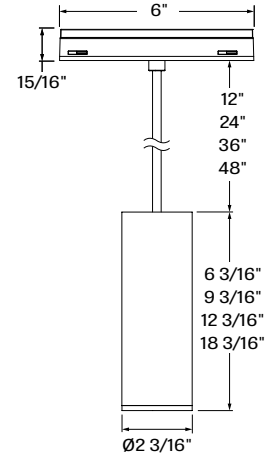

**MIPIV2DTCY** - Mini Pivot 2" Dot Cylinder  
- Decorative baffle

SIZE	HEIGHT	WEIGHT	
1.5IN	6IN	0.88 lb	0.4 kg
	9IN	0.99 lb	0.45 kg
	12IN	1.1 lb	0.5 kg
	18IN	1.43 lb	0.65 kg
2IN	6IN	1.21 lb	0.55 kg
	9IN	1.43 lb	0.65 kg
	12IN	1.54 lb	0.7 kg
	18IN	1.87 lb	0.85 kg

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT PETITE CYLINDER



### DESCRIPTION


The Mini Pivot Petite Cylinder is true-to-size, encased in minimalist housing, and elegantly detailed with a slim strain relief and the option of a bevel or glow ring baffle style. Optically, it benefits from our CircaFlex™ beam-splitting technology that allows light to follow an intended optical path with maximal precision, minimal spread, and even distribution.

### Order Guide


LUMINAIRE ID	CYLINDER HEIGHT	LIGHT SOURCE	BEAM	CRI	LUMEN PACKAGE	COLOR TEMP.
<b>MIPIVPETCY</b>		<b>SW</b>				
<b>MIPIVPETCY</b> - Mini Pivot Petite Cylinder	<b>6IN</b> - 6" <b>9IN</b> - 9" <b>12IN</b> - 12" <b>18IN</b> - 18"	<b>SW</b> - Static white	<b>35DEG</b> - 35° Narrow flood <b>40DEG</b> - 40° Flood <b>45DEG</b> - 45° Flood	<b>80CRI</b> - 80 CRI <b>90CRI</b> - 90 CRI	<b>425LM</b> - 425 lm, 8.2 W <b>525LM</b> - 525 lm, 10 W <b>650LM</b> - 650 lm, 12 W	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K

BAFFLE STYLE	BAFFLE FINISH Specify NA for Glow ring	MODULE FINISH	SUSPENSION	SUSPENSION LENGTH	ACCESSORY
<b>BVL</b> - Bevel <b>GLR</b> - Glow ring	<b>FTMB</b> - Textured matte black <b>CF#</b> - Custom finish, specify RAL # <b>NA</b> - Not applicable	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#	<b>PCB</b> - Black power cord <b>PCW</b> - White power cord	<b>12IN</b> - 12" <b>24IN</b> - 24" <b>36IN</b> - 36" <b>48IN</b> - 48"	<b>LSDL</b> - Soft diffused lens, Solite <b>HEX</b> <sup>1</sup> - Hex louver  <sup>1</sup> Not available with glow ring baffle option.


### Photometrics



**35DEG** - 35° Narrow flood



**40DEG** - 40° Flood



**45DEG** - 45° Flood

### Module Wattage (W)

LUMEN PACKAGE at 35K/90 CRI	WATTAGE
425	8.2 W
525	10 W
650	12 W

### Multiplier - CCT/CRI

CCT (K)	Lumens	
	CRI80	CRI90
2700	1.11	0.91
3000	1.13	0.96
3500	1.18	1.00
4000	1.20	1.02

### BAFFLE STYLE

BVL - Bevel	1
GLR - Glow ring	0.85

### ACCESSORIES

LSDL - Soft diffused lens, Solite	1
HEX - Hex Louver	0.86



# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## DIMENSIONS

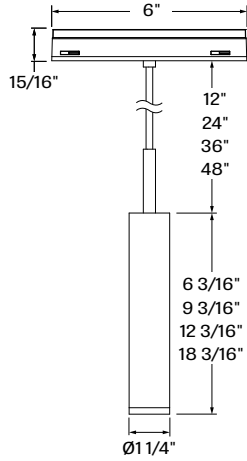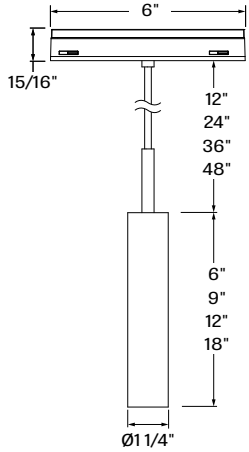

HEIGHT	WEIGHT	
6IN	0.84 lb	0.38 kg
9IN	1.06 lb	0.48 kg
12IN	1.28 lb	0.58 kg
18IN	1.65 lb	0.75 kg

**MIPIVPETCY** - Mini Pivot Petite Cylinder  
- Bevel

**MIPIVPETCY** - Mini Pivot Petite Cylinder  
- Glow ring

BVL Bevel	GLR Glow ring

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT GLOBE



### DESCRIPTION


The Mini Pivot Globe offers universal appeal and uniform illumination. The spherical fixture is lit fully with our Isotropic Radiant Optic™ (IRO™) distributing light smoothly and evenly in all directions, thereby avoiding undesirable hotspots.

### Order Guide


LUMINAIRE ID	SIZE	OPTIC	LIGHT SOURCE	CRI	LUMEN PACKAGE
<b>MIPIVGLB</b>		<b>IRO</b>	<b>SW</b>		
<b>MIPIVGLB</b> - Mini Pivot Globe	<b>4IN</b> - 4" diameter <b>6IN</b> - 6" diameter <b>8IN</b> - 8" diameter	<b>IRO</b> - Isotropic Radiant Optic	<b>SW</b> - Static white	<b>80CRI</b> - 80 CRI <b>90CRI</b> - 90 CRI <b>95CRI</b> - 95 CRI	<b>300LM</b> - 300 lm, 6 W (Ø4") <b>600LM</b> - 600 lm, 14.4 W (Ø6") <b>900LM</b> - 900 lm, 19.1 W (Ø8")

COLOR TEMP.	MODULE FINISH	SUSPENSION	SUSPENSION LENGTH
<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#	<b>PCB</b> - Black power cord <b>PCW</b> - White power cord	<b>12IN</b> - 12" <b>24IN</b> - 24" <b>36IN</b> - 36" <b>48IN</b> - 48"

### Photometrics



### Dimensions

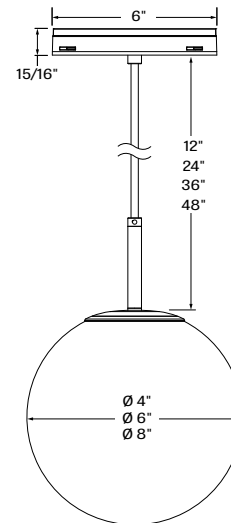

SIZE	WEIGHT	
4IN	1.1 lb	0.5 kg
6IN	1.8 lb	0.8 kg
8IN	2.6 lb	1.2 kg

### Module Wattage (W)

SIZE	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
4IN	300	6 W
6IN	600	14.4 W
8IN	900	19.1 W

### Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.94	0.77	0.72
3000	0.96	0.82	0.75
3500	1.00	0.85	0.81
4000	1.02	0.87	0.79

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT CARET



### DESCRIPTION

Timeless in appearance and flexible in function, the conical Mini Pivot Caret embodies the simple decorative beauty of geometric design and the sophisticated power of innovative technology. The Caret is equipped with our Unity Pointed (UP) technology, which delivers lens brightness uniformity.


### Order Guide

LUMINAIRE ID	SIZE	OPTIC	LIGHT SOURCE	CRI	LUMEN PACKAGE <sup>2</sup>
<b>MIPIVCAR</b>	<b>8IN</b>	<b>HLO</b>			
<b>MIPIVCAR</b> - Mini Pivot Caret	<b>8IN</b> - 8" diameter	<b>HLO</b> - High-Efficiency Lambertian Optic	<b>SW</b> - Static white <b>FS</b> - Full spectrum	<b>80CRI</b> <sup>1</sup> - 80 CRI <b>90CRI</b> <sup>1</sup> - 90 CRI <b>95CRI</b> - 95 CRI	<b>500LM</b> - 500 lm, 5.6 W <b>700LM</b> - 700 lm, 7.7 W
<sup>1</sup> Not available with full spectrum.					
<sup>2</sup> Lumen outputs are reduced with full spectrum, consult factory.					

COLOR TEMP.	INNER TRIM FINISH	MODULE FINISH	SUSPENSION	SUSPENSION LENGTH
<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#	<b>PCB</b> - Black power cord <b>PCW</b> - White power cord	<b>12IN</b> - 12" <b>24IN</b> - 24" <b>36IN</b> - 36" <b>48IN</b> - 48"

### Photometrics




### Module Wattage (W)

SIZE	LUMEN PACKAGE at 35K/90 CRI	WATTAGE
8IN	500	5.6 W
	700	7.7 W

### Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	1.13	0.94	0.88
3000	1.17	0.96	0.90
3500	1.19	1.00	0.92
4000	1.19	1.00	0.94

### Dimensions

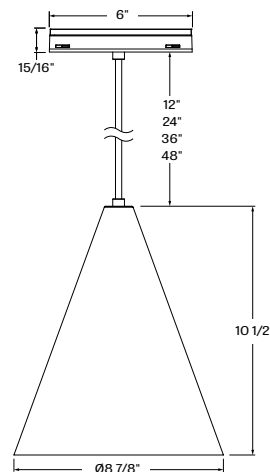

SIZE		WEIGHT	
8IN		2.2 lb	1 kg

**MIPIVCAR** - Mini Pivot Caret 8" diameter



# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT TAB ACOUSTIX



### DESCRIPTION

Mini Pivot Tab Acoustix is an acoustic pendant that delivers quality light, effective acoustic control, a touch of softness with its rounded corners, and a punch of color thanks to its sound-absorbing felt panel (made from PET resin) available in a variety of standard and premium colors.

### Order Guide

LUMINAIRE ID	DISTRIBUTION	OPTIC	LIGHT SOURCE	CRI	LUMEN PACKAGE
<b>MIPIVTABACO</b>	<b>D</b>	<b>HLO</b>	<b>SW</b>	<b>90CRI</b>	<b>250LMF</b>
MIPIVTABACO - Mini Pivot Tab Acoustix	D - Direct	HLO - High-Efficiency Lambertian Optic	SW - Static white	90CRI - 90 CRI	250LMF - 250 lm/ft

COLOR TEMP.	LUMINAIRE LENGTH	LUMINAIRE HEIGHT	MODULE FINISH	SUSPENSION	SUSPENSION LENGTH
		<b>8IN</b>			
27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	2FT - 2' 3FT - 3' 4FT - 4'	8IN - 8"	FTMB - Textured matte black FTMW - Textured matte white CF# - Custom finish, specify RAL#	PCB - Black power cord PCW - White power cord	12IN - 12" 24IN - 24" 36IN - 36" 48IN - 48"

### FELT COLOR

STANDARD COLORS	PREMIUM COLORS <sup>1,2</sup>
FWN    LVN FON    LEN ION    CYN TBN    PMN MDN    FGN	PKN    CDN    IVN    BHN OGN    SYN    SLN    MON LNN    BLN    CNN LMN    NVN    GHN

<sup>1</sup>Please consult factory for more color options.  
<sup>2</sup>Lead time may vary.





# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## Dimensions

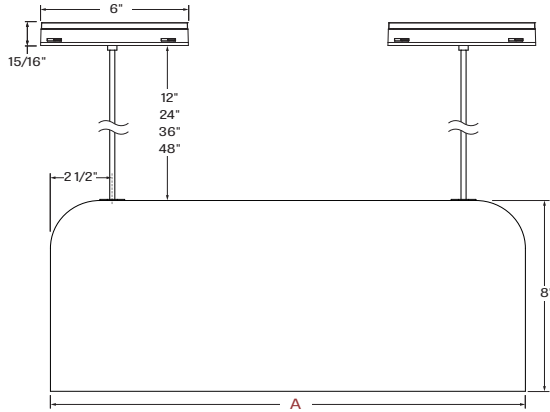

Width  
0.7 inches  
(18 mm)

**MIPIVTABACO** - Mini Pivot Tab Acoustix


**MIPIVTABACO** - Mini Pivot Tab Acoustix - side view



**MIPIVTABACO** - Mini Pivot Tab Acoustix - bottom view

NOMINAL LENGTH	A FIXTURE LENGTH	B DIRECT LENS LENGTH	WEIGHT	
2FT	22 7/8"	21 5/8"	1.65 lb	0.75 kg
3FT	34 7/8"	33 5/8"	2.43 lb	1.1 kg
4FT	46 7/8"	45 5/8"	3.3 lb	1.5 kg

## Photometrics



### Module Wattage (W)

NOMINAL LENGTH	LUMEN PACKAGE at 35k/90 CRI	WATTAGE
2FT	500	12.6 W
3FT	750	24.6 W
4FT	1000	33.2 W

### Multiplier - CCT/CRI

CCT (K)	Lumens CRI90
2700	1.02
3000	1.01
3500	1.00
4000	0.98



# MINI PIVOT MODULE




Project: \_\_\_\_\_


Type: \_\_\_\_\_

## Felt Color


### Standard Color Options



**FWN** - FROST WHITE



**FON** - FOG



**ION** - IRON



**TBN** - TRUE BLACK



**MDN** - MIDNIGHT BLUE



**LVN** - LAVENDER



**LEN** - LATTE



**CYN** - CHERRY



**PMN** - PLUM



**FGN** - FOREST GREEN

### Premium Color Options\*




**PKN** - PAPRIKA



**OGN** - ORANGE



**LNN** - LEMON



**LMN** - LIME



**CDN** - CLOUDY



**SYN** - SKY



**BLN** - BLUEBERRY



**NVN** - NAVY




**IVN** - IVORY



**SLN** - STEEL



**CNN** - CARBON



**GHN** - GRAPHITE



**BHN** - BLUSH



**MON** - MOCHA

\*Please consult factory for more color options.

\*Lead time may vary.

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT BRIDGE





### DESCRIPTION

The Mini Pivot Bridge is a connector module mounted across two tracks and designed to tap into Mini Pivot's electrical system. In this way, the Bridge serves as a powered track on which additional luminaire modules can be placed.

### Order Guide

LUMINAIRE ID	LENGTH	MODULE FINISH
<b>MIPIVBGE</b>		
<b>MIPIVBGE</b> - Mini Pivot Bridge	<b>#FT#IN</b> <sup>1</sup> - Specify nominal length (#) in 1" and/or 1" increments  <sup>1</sup> Minimum length is 2'. Maximum length is 8'.	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#

### Dimensions

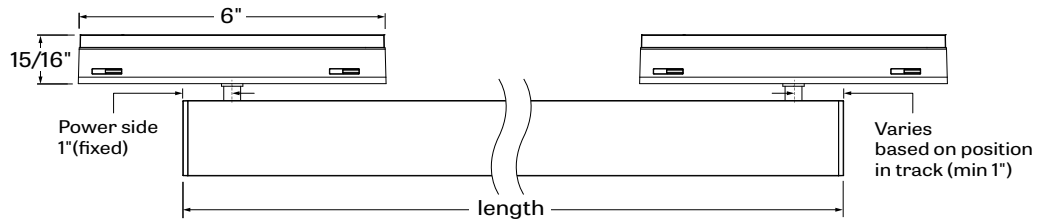


**MIPIVBGE** - Mini Pivot Bridge

**MIPIVBGE** - Mini Pivot Bridge - Side view

### Bridge wattage

The Mini Pivot Bridge module shares power with an adjoining track section (via the power side adapter). In order to determine the rated wattage per foot of a track section + bridge, you must first calculate the rated wattage of the track section powering the bridge (12W/ft x length) then divide that wattage by the total length of that section + the length of the bridge module attached to it.

### Track with Bridge

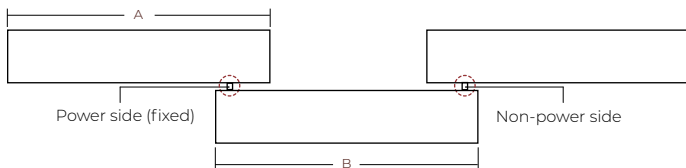

### Example:

Track length [A] = 8 ft

Bridge length [B] = 4 ft

Track wattage (W) = 12 W/ft x 8 ft = 96 W

Track + bridge wattage per foot (W/ft) = 96W / [8 ft + 4 ft] = 8 W/ft

LENGTH	WEIGHT	
2FT	1.43 lb	0.65 kg
3FT	2.05 lb	0.93 kg
4FT	2.65 lb	1.20 kg
5FT	3.26 lb	1.48 kg
6FT	3.86 lb	1.75 kg
7FT	4.48 lb	2.03 kg
8FT	5.07 lb	2.30 kg

# MINI PIVOT MODULE



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## MINI PIVOT BLANK




### DESCRIPTION

The Mini Pivot Blank modules are unlit modules that click securely into the bottom of the Mini Pivot Track system. Their purpose is to mask unlit track modules with their smooth, unassuming appearance.

### Order Guide

LUMINAIRE ID	LENGTH	MODULE FINISH
<b>MIPIVBLA</b>		
<b>MIPIVBLA</b> - Mini Pivot Blank	<b>#FT#IN</b> <sup>1</sup> - Specify nominal length (#) in 1' and/or 1" increments <small><sup>1</sup>Minimum length is 1". Maximum length is 8'.</small>	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#

### Dimensions



LENGTH	WEIGHT (per ft.)	
1FT	1 lb	0.45 kg

**MIPIVBLA** - Mini Pivot Blank



## Technical Specifications

### OPTICS

#### High-Efficiency Lambertian Optic (HLO)

Shielding of diffusing 0.075" thick acrylic provides up to 88% transmission and good obscuration. Matte white reflectors distribute LED output across the shielding. Luminaire brightness is controlled by the ratio of luminous flux to shielding area.

#### Diamond Prism Optic (DPO)

The Diamond Prism Optic™ (DPO™) is our patent-pending 3-tiered optic meticulously crafted to refract and reflect beams with great precision, effectively keeping glare to a minimum while delivering light of exceptional quality and visual comfort.

#### Mini Pivot Solo and Duet Optic

The Mini Pivot Solo and Duet modules use an LED light source coupled with a TIR refractor to provide three beam angles of 25°, 35°, and 45°, while producing up to 350 lumens.

#### CircaFlex™ Optic

The CircaFlex™ Optic, at just 0.8" for Mini Pivot Petite Cylinder and 1.2" for Mini Pivot Dot/Dot Cylinder, uses advanced beam-splitting technology to allow light to follow an intended optical path with maximal precision, minimal spread, and even distribution.

#### Isotropic Radiant Optic™ (IRO™)

The Isotropic Radiant Optic™ (IRO™) is a spherical lens designed with a spike-textured surface through which light rays are diffused outward and equally in all directions.

### LIGHT SOURCE - STATIC WHITE

LEDs are available in 2700K, 3000K, 3500K and 4000K with a choice of 80 CRI, 90 CRI, or 95 CRI, with elevated R9 value for 90 CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

### LIGHT SOURCE - FULL SPECTRUM

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

### LOCKING MECHANISM

Lightweight, the Mini Pivot Prism, HLO, and Blanks modules easily lock into place on the system track with a simple click. All other modules are secured with a secondary screw-locking mechanism for added protection.



Linear Modules



Accent Modules

### CERTIFICATION

**ETL** - Rated for Indoor Dry locations. Conforms to UL Standard 1574 and certified to CAN/CSA Standard C22.2 No. 250.0.

### WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.