

# NOVA-VEGA FLUORESCENT


GRID CEILING - REMOTE BATTERY PACK

**LUMENWERX**  
WWW.LUMENWERX.COM

**IMPORTANT:** Installation instructions are shown with Nova and applies to Nova and Vega fixtures


**NOTE:** Wire dimming conductors as Class 1

## 1 SINGLE FIXTURE

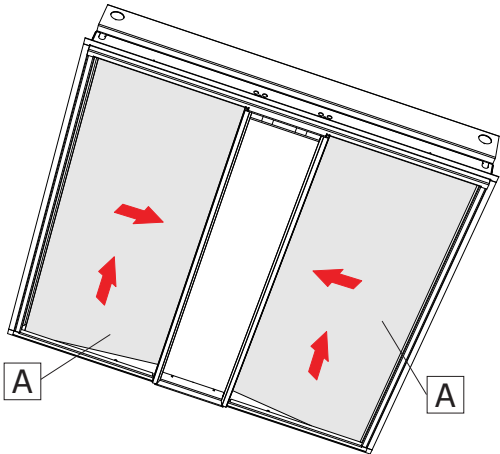


Make sure the power to the fixture is turned off. Remove the side lens (A) by sliding and pulling them.

2

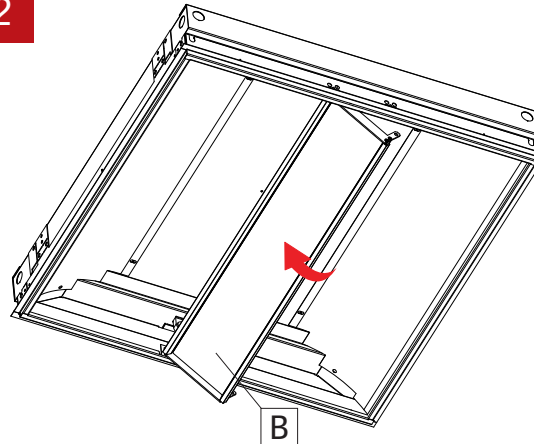


Pull the center basket (B) down to rotate.

3

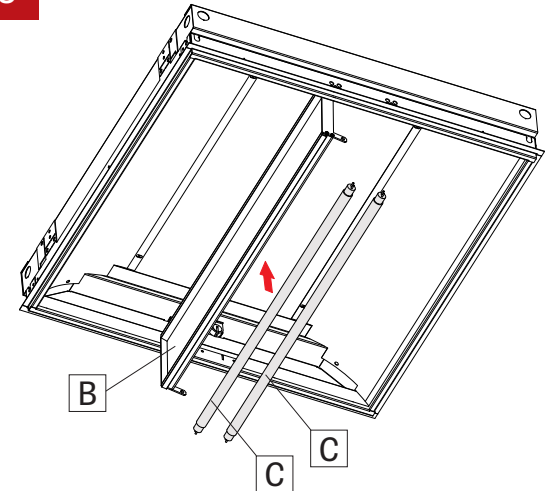


Install the lamps (C) and put back in place the center basket (B).

4

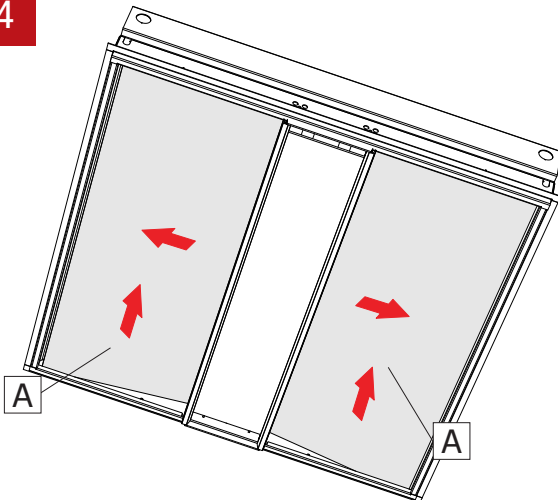


Reinstall the side lens (A).

5

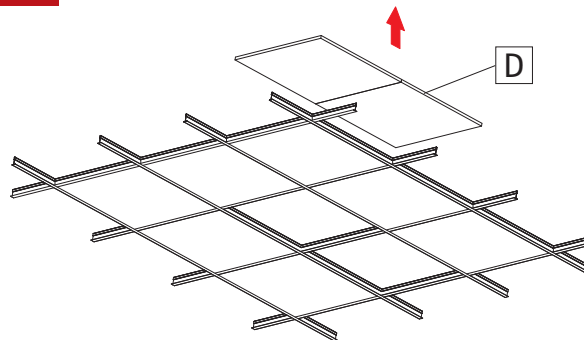

Remove ceiling tiles (D) where the fixture will be installed and adjacent tiles for easy access during installation.







6

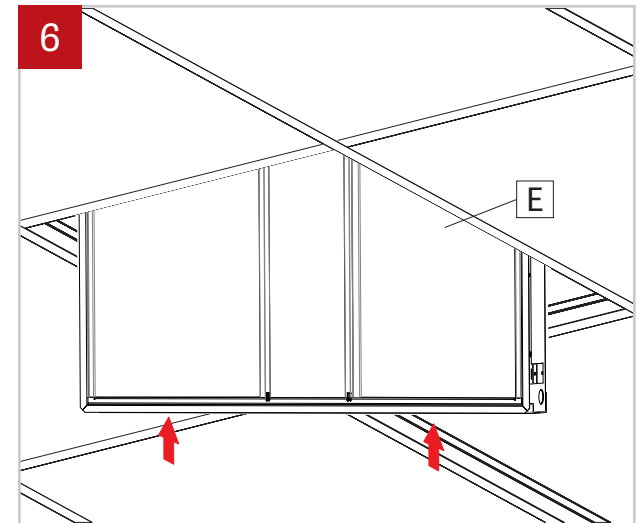

Insert the fixture (E) above the ceiling grid as shown.

# NOVA-VEGA FLUORESCENT


## GRID CEILING - REMOTE BATTERY PACK

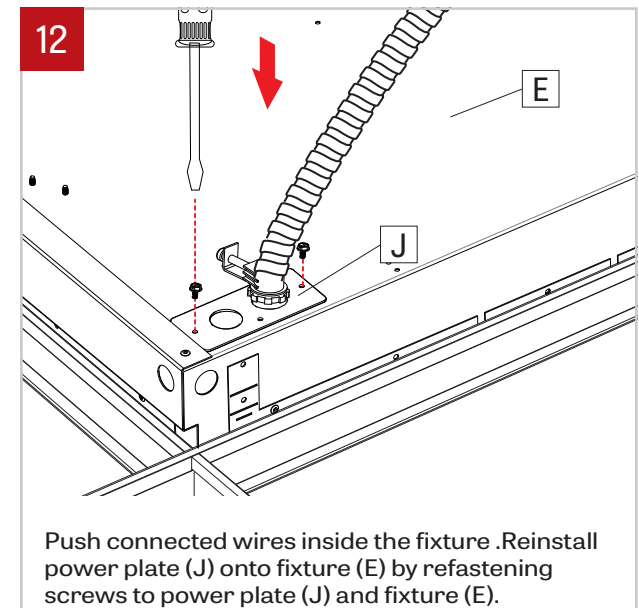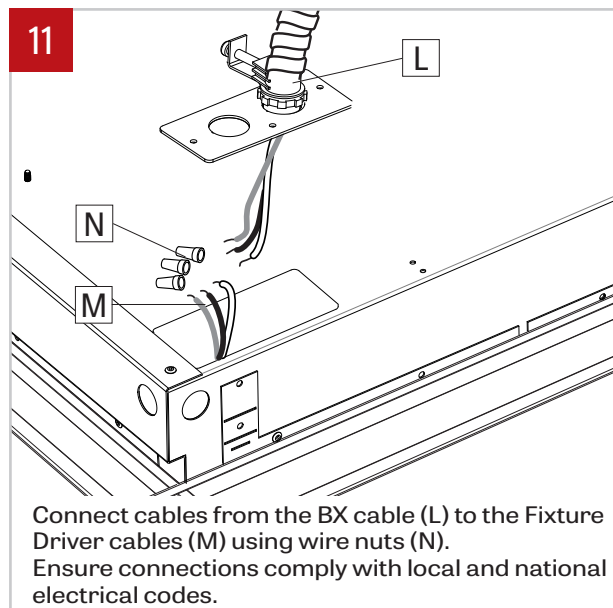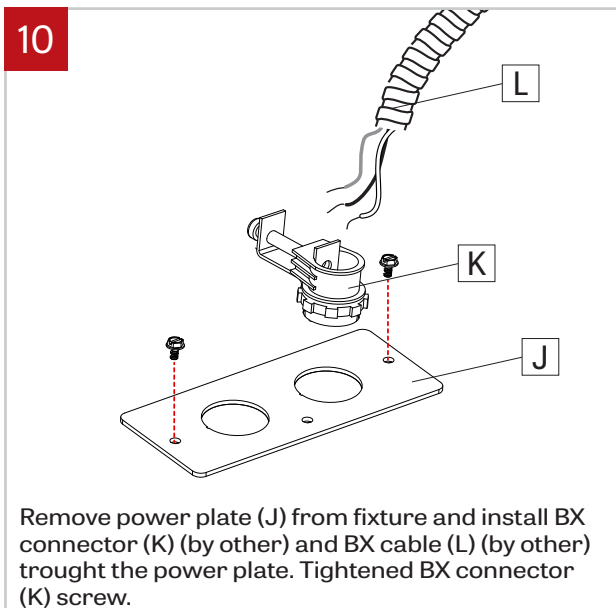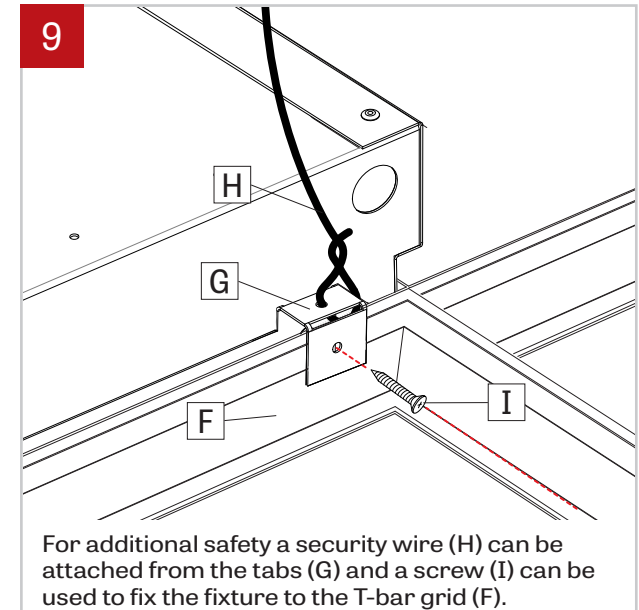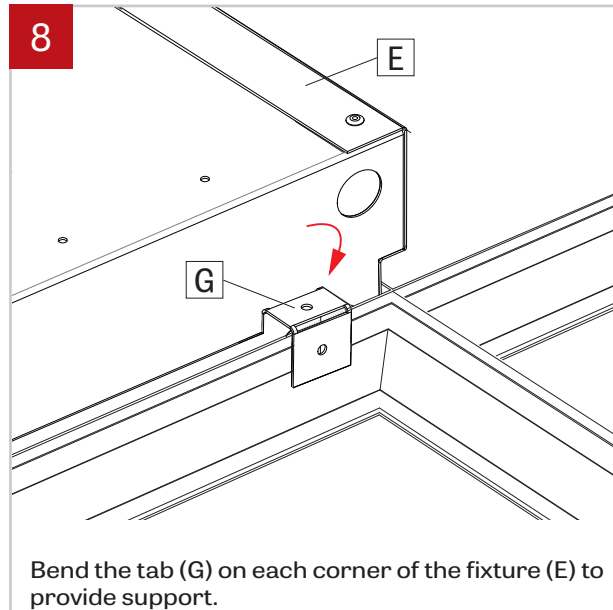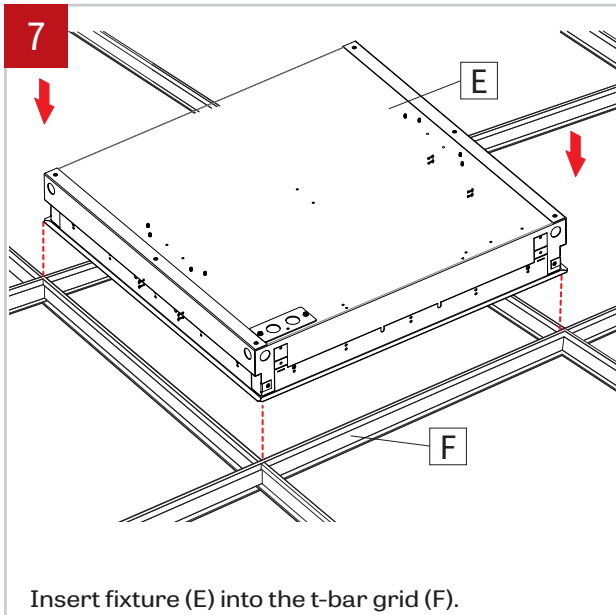

# NOVA-VEGA FLUORESCENT


## GRID CEILING - REMOTE BATTERY PACK

13

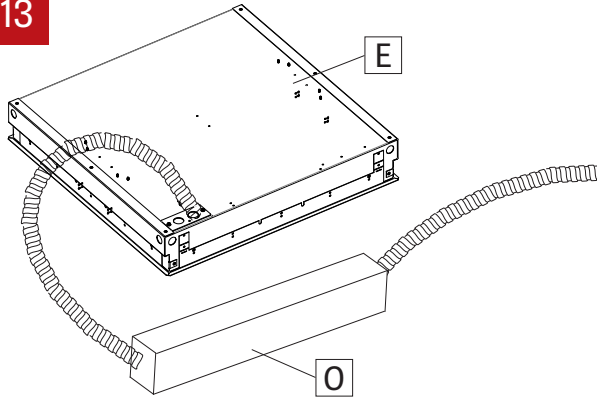


Place remote battery pack (O) not further than 50 ft from the fixture (E) (for an 18 gauge wire).

14

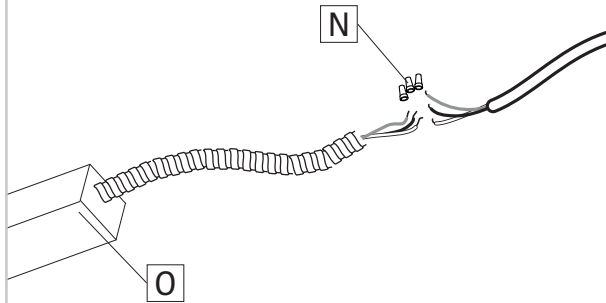

Connect remote battery pack (O) to the building's power feed using wire nuts (N).

15

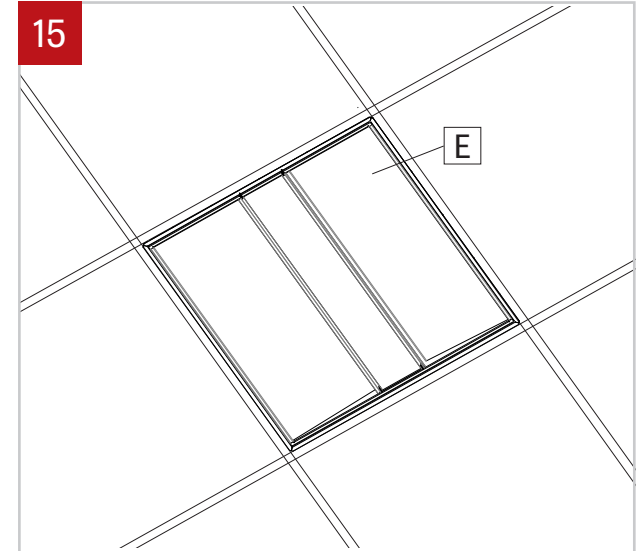

Power to the fixture (E) can now be safely turned on.