
## **NOVA-VEGA**

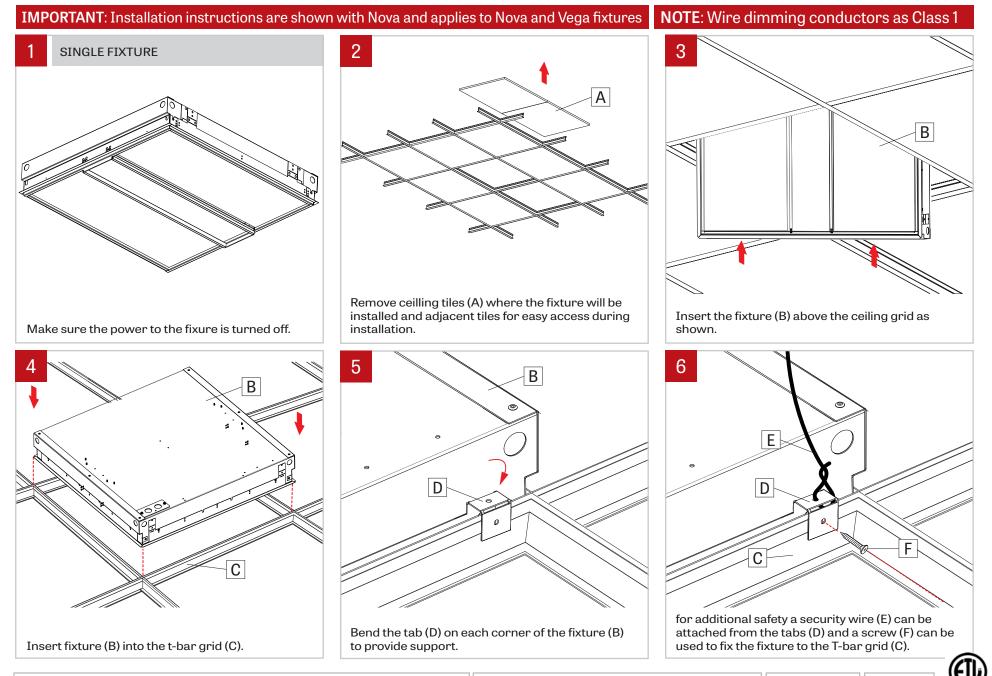

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to LumenWerx ULC. FILENAME:NOVA-VEGA-GRID-CEILING-WITH-REMOTE-BATTERY-PACK-INST


Page: 1/2 Intertel

November 12, 2019

## **NOVA-VEGA**


## **GRID CEILING - WITH REMOTE BATTERY PACK**






Remove power plate (G) from fixture and install BX connector (H) (by other) and BX cable (I) (by other) trought the power plate. Tightened BX connector (H) screw.


www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to LumenWerx ULC.



Connect cables from the BX cable (I) to the Fixture Driver cables (J) using wire nuts (K). Ensure connections comply with local and national electrical codes.



Push connected wires inside the fixture .Reinstall power plate (G) onto fixture (B) by refastening screws to power plate (G) and fixture (B).

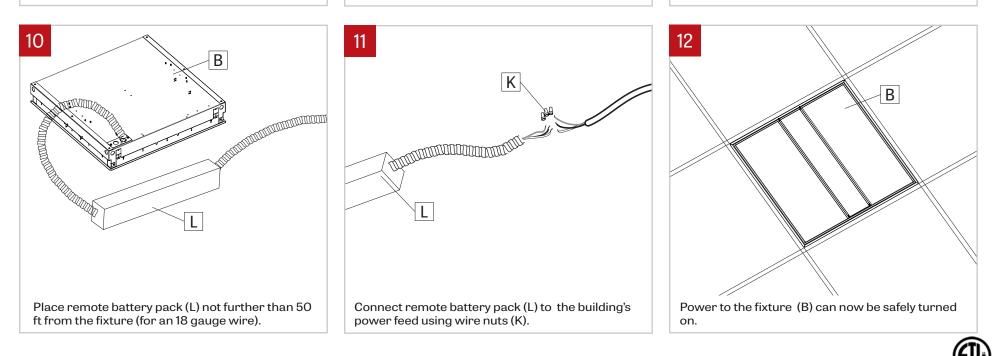

FILENAME:NOVA-VEGA-GRID-CEILING-WITH-REMOTE-BATTERY-PACK-INST November 12, 2019 Page: 2 / 2