PETITE DOWNLIGHT
Recessed Remodel - Light Element Replacement

Lumenwerx

INSTALLATION INSTRUCTIONS

⚠ This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

⚠ Disconnect power before installation or servicing.

⚠ Do not cover the light element lens or heatsink with any materials or adhesive tapes when the fixture is powered.

⚠ Handle the LED cartridge carefully during removal and installation. Tools must not touch the LED chips. Contact may result in damage and LED failure.

⚠ Wire dimming conductors as Class 1.

⚠ A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

⚠ For luminaires specified as recessed, clearance between the sides of the luminaire and parts of the building must be 1/2" minimum; clearance to insulating materials to be 3" minimum, unless luminaire is IC rated.

⚠ For luminaires installed in wet locations, properly seal all mounting and electrical points.

⚠ Warranty claims will not be accepted if incorrect driver or light element is used.

Intertek

 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.

PETITE DOWNLIGHT


Recessed Remodel - Light Element Replacement

Lumenwerx


LIGHT ELEMENT REPLACEMENT

1 REMOVE LIGHT ELEMENT.


Pull the light element **[A]** down with the provided tool **[B]**. Insert the tool tips between the lens and the trim through the gap shown.

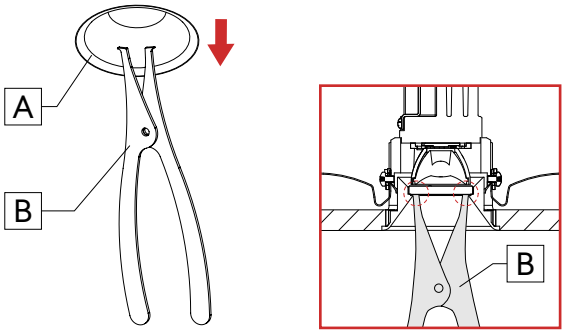

Pull out the light element **[C]** from the ceiling.

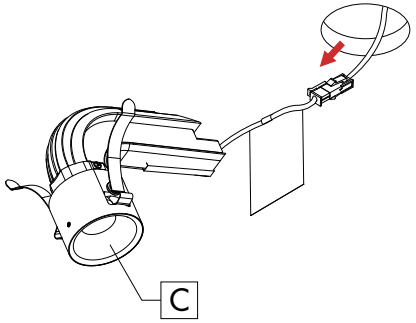


Disconnect the connection box connector **[D]** and the light element connector **[E]**. Remove the light element **[C]**.




2 REPLACE LIGHT ELEMENT.

Bring the new light element **[F]** closer to the ceiling. Connect the new light element **[F]** to the connection box in ceiling with quick connectors.



Squeeze the spring clips **[G]** upwards onto the new light element **[F]**. Insert the new light element **[F]** into ceiling until the spring clips **[G]** snap back above the ceiling.

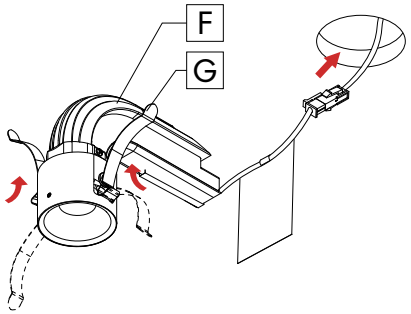

Intertek

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification.