


VIA WET FLUORESCENT

SURFACE MOUNT - INSTALLATION


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

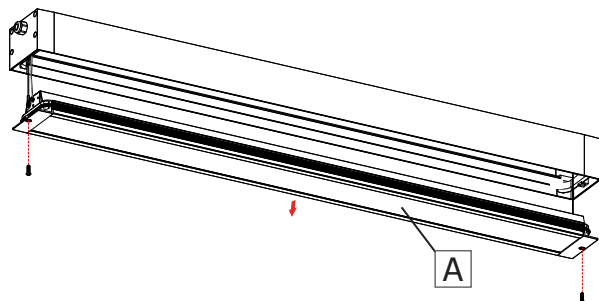


Make sure the power is turned off. Unscrew and lower the lens frame (A) retained by security cables.

2

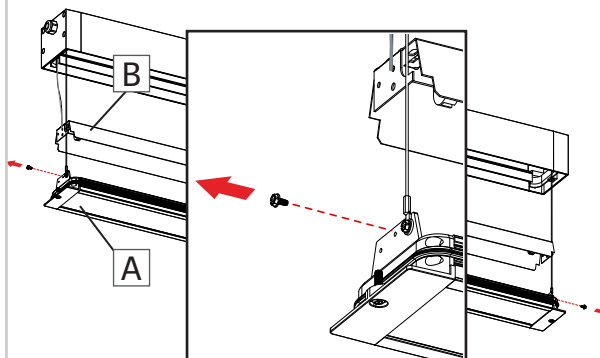


Unscrew the reflector (B) from both side of the lens frame (A) and delicately lift it.

3

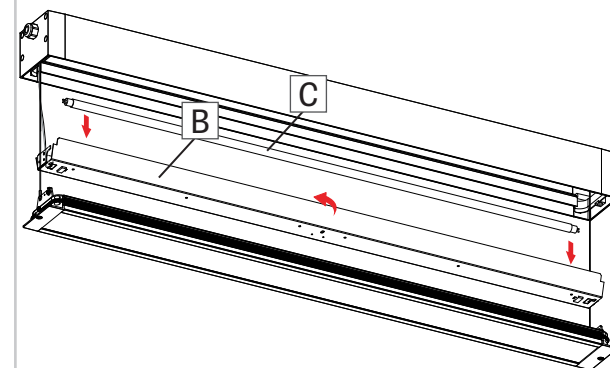


Rotate the reflector (B) and install the lamp (C).

4

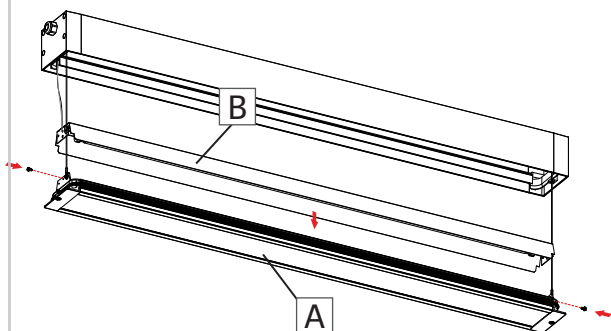


Screw the reflector (B) back on the lens frame (A).

5

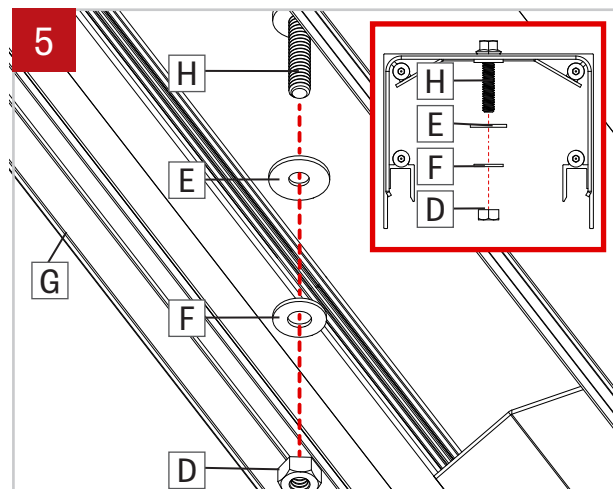

Remove nuts (D), rubber washers (E) and steel washer (F) inside the fixture (G). Put them in a safe place. Finally remove the screws (H) that won't be needed anymore.


6

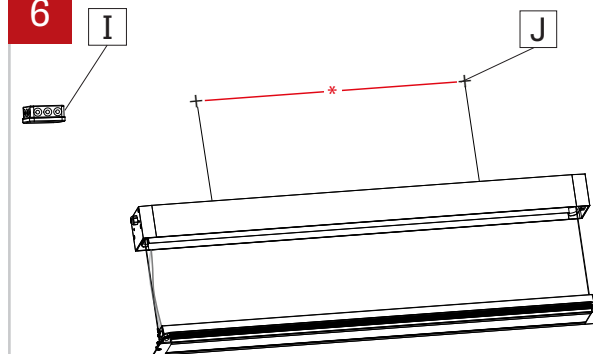


Locate junction box (I) and mounting points (J) in the ceiling. Refer to dimensions [*] supplied in client drawings.

VIA WET FLUORESCENT


SURFACE MOUNT - INSTALLATION

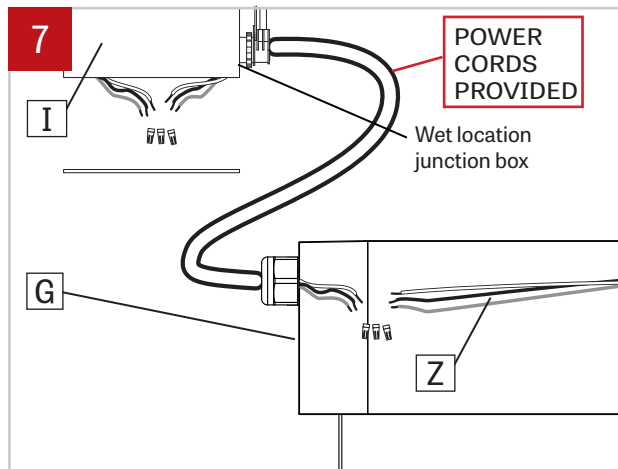


Make electrical connections between main power and fixture (G) inside junction box (I). Pull inside the wires (Z) that are outside of the fixture (G) and make connection between ballast and the main power inside the fixture (G). Screw back junction box cover.

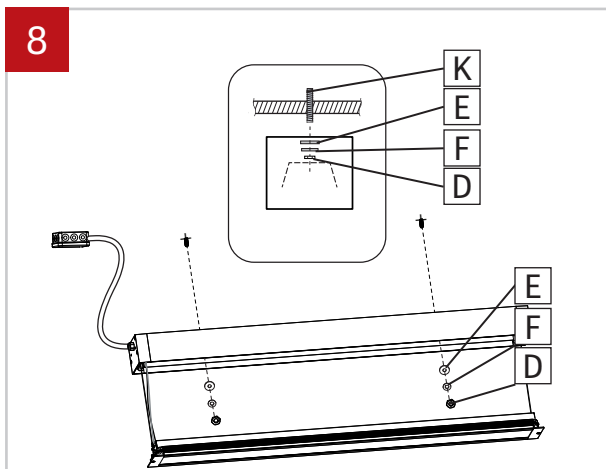


Fasten fixture to threaded stud (K) using rubber washer (E), steel washers (F) and nuts (D) without overtighten. **(If there's no threaded stud present, the fixture can be screwed directly onto the ceiling).**

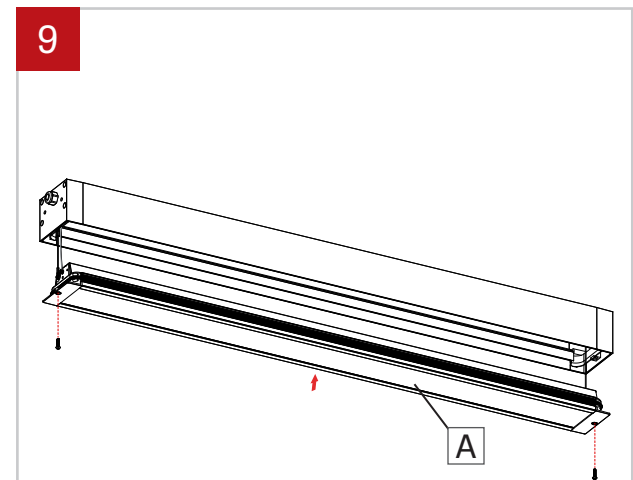


Screw back in place the lens frame (A) making sure not pinching the security cables on the sides.

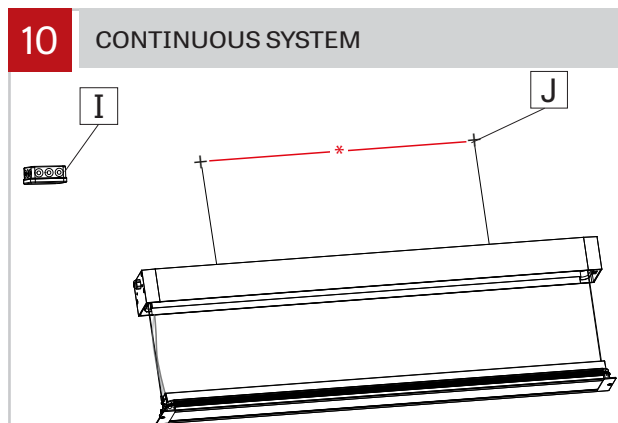

Locate junction box (I) and mounting points (J) in the ceiling. Refer to dimensions [*] supplied in client drawings.

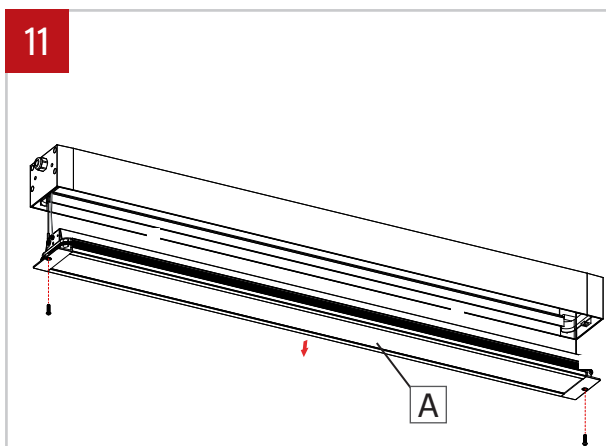

Unscrew and lower the lens frame (A) retained by security cables. Repeat for all fixtures in the run.

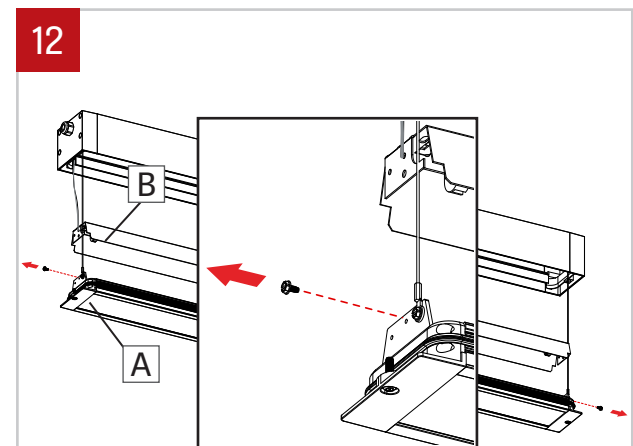


Unscrew the reflector (B) from both side of the lens frame (A) and delicately lift it.

VIA WET FLUORESCENT


SURFACE MOUNT - INSTALLATION

13

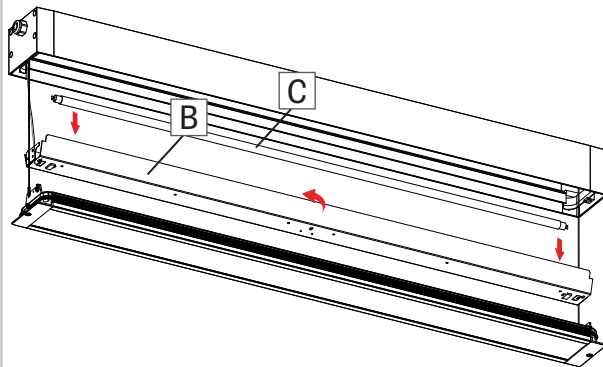


Rotate the reflector (B) and install the lamp (C).

14

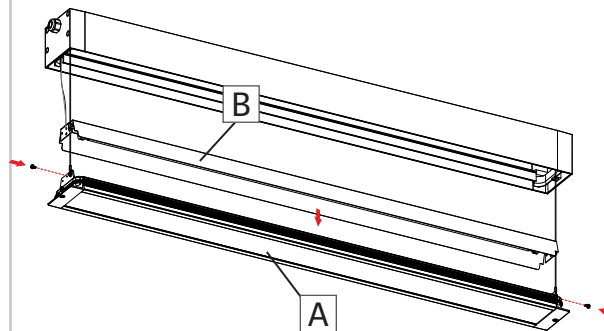


Screw the reflector (B) back on the lens frame (A). Repeat steps 11 to 14 for all fixtures in the run.

15

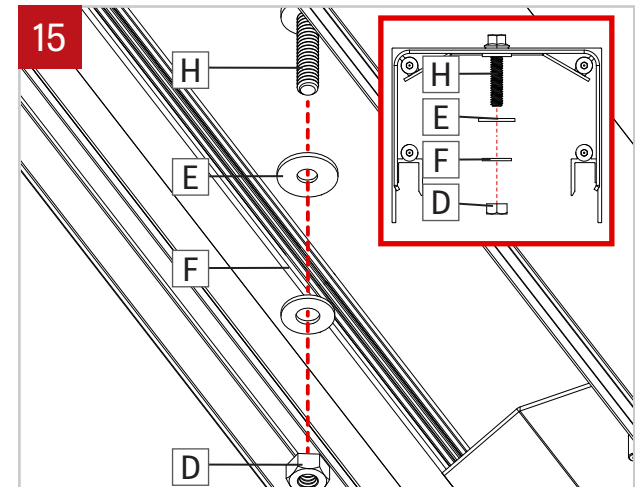


Remove nuts (D), rubber washers (E) and steel washer (F) inside all fixtures. Put them in a safe place. Finally remove the screws (H) that won't be needed anymore.

16

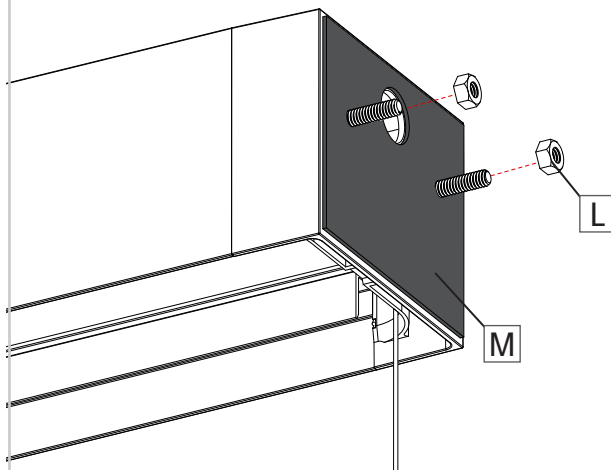


Unscrew and remove nuts (L) on the outside of the joiner (M). Put the nuts (L) in a safe place.

17

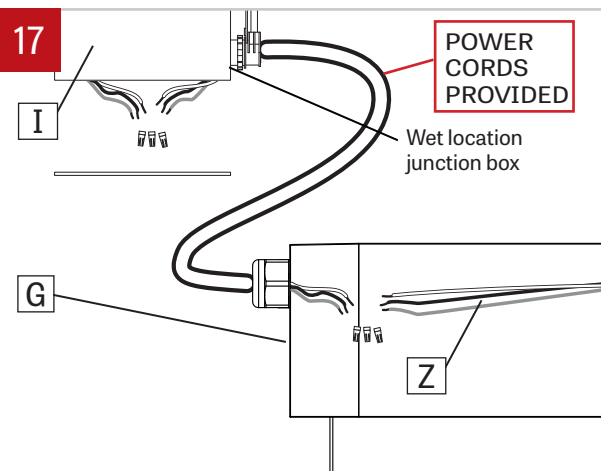

Make electrical connections between main power and fixture (G) inside junction box (I). Pull inside the wires (Z) that are outside of the fixture (G) and make connection between ballast and the main power inside the fixture (G). Screw back junction box cover.

18

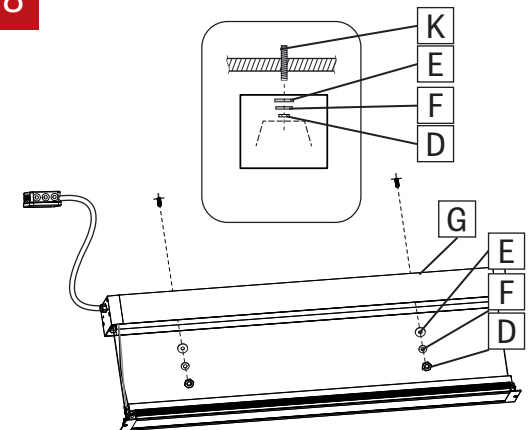


Fasten first fixture (G) to threaded stud (K) using rubber washer (E), steel washers (F) and nuts (D) without overtighten.

VIA WET FLUORESCENT


SURFACE MOUNT - INSTALLATION

19

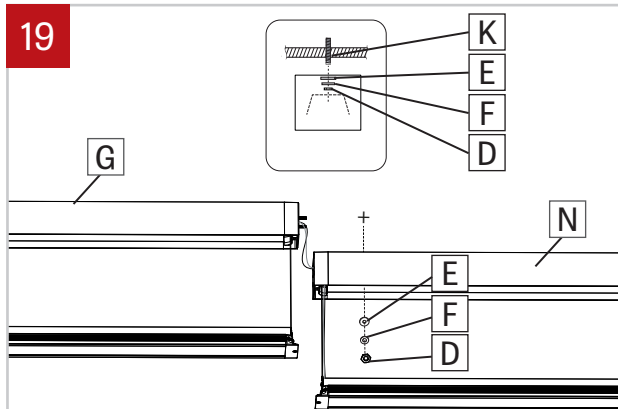


Locate mounting points of the second fixture (N) and push the wires inside the first fixture through the end cap holes. Align the second fixture (N) to the screws of the joiner of the first fixture (G) and install it. Fasten the second fixture to threaded stud (K) using rubber washer (E), steel washers (F) and nuts (D) without overtighten.

20

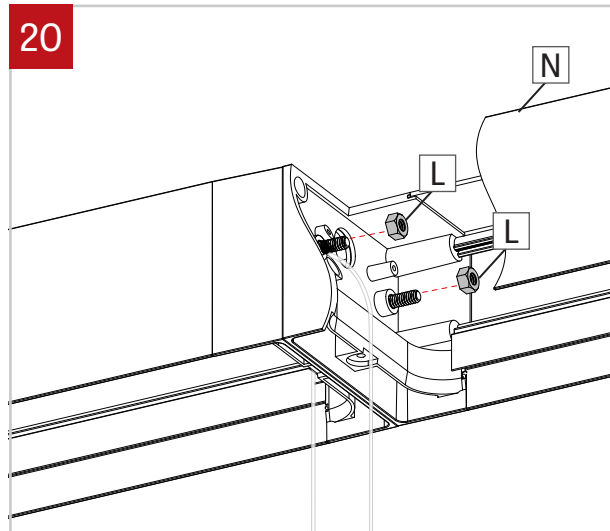


Reinstall the nuts (L) inside the second fixture (N) on the joiner to secure it.

21

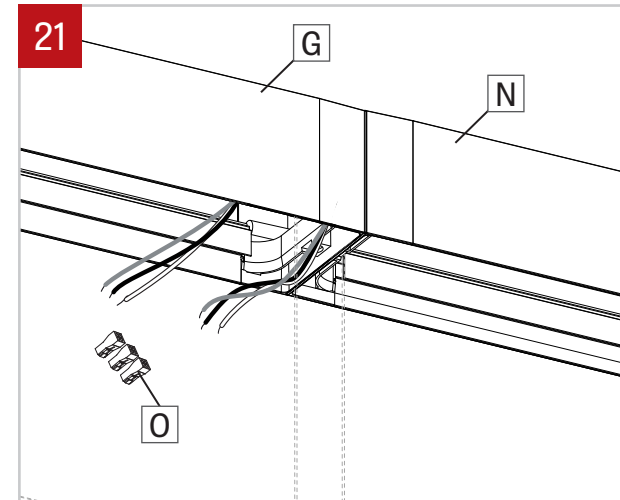

Make the wires connection between (G) and (N) using quick connectors (O).

22

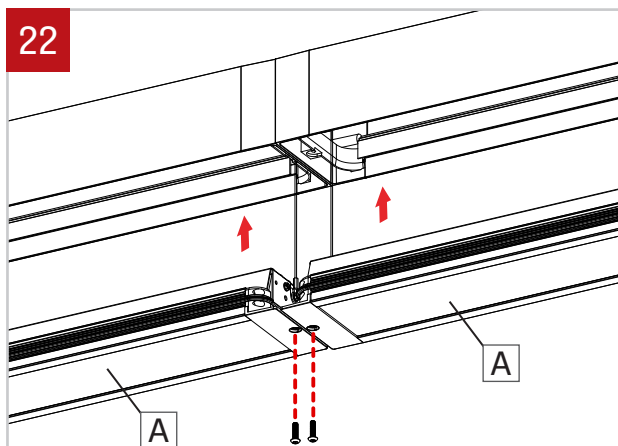

Screw back in place the lens frame (A) making sure not pinching the security cables on the sides.