



**NOTE:** Wire dimming conductors as Class 1

1

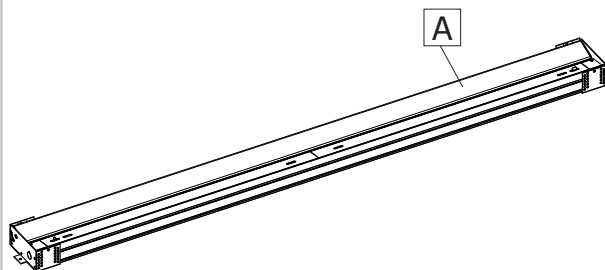


Make sure the power to the fixture (A) is turned off.

2

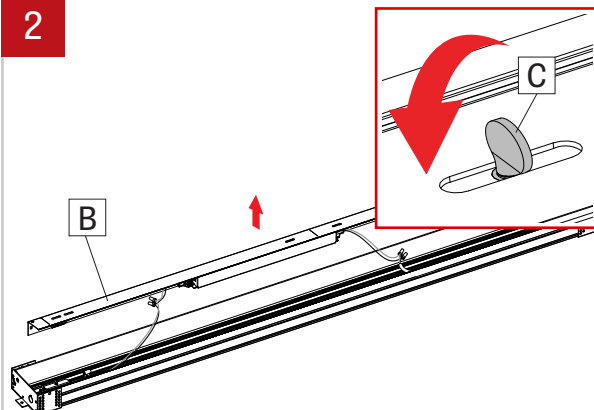


Remove the side reflector (B) by unlocking the thumbscrew (C).

3

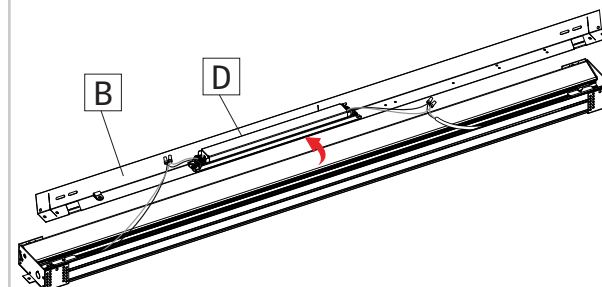


Rotate the side reflector (B) to get access to the driver (D).

4

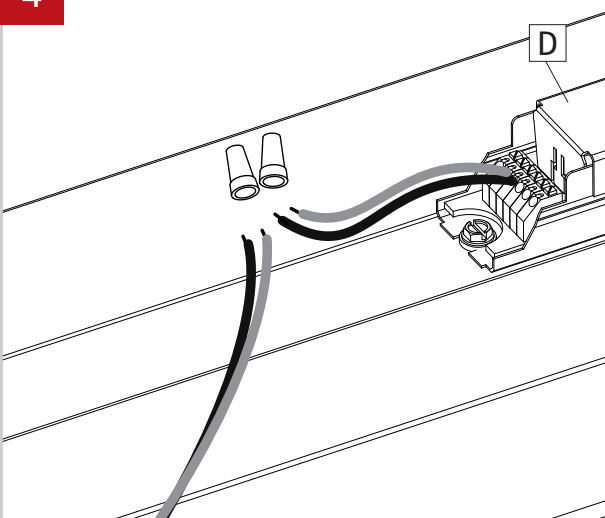


Disconnect wires from both side of the driver (D).

5

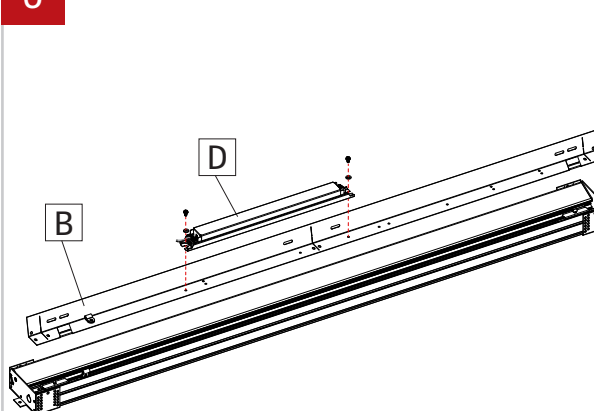

Unscrew the driver (C) from the side reflector (B). Replace the driver, screw it back in place and make electrical connections.

6

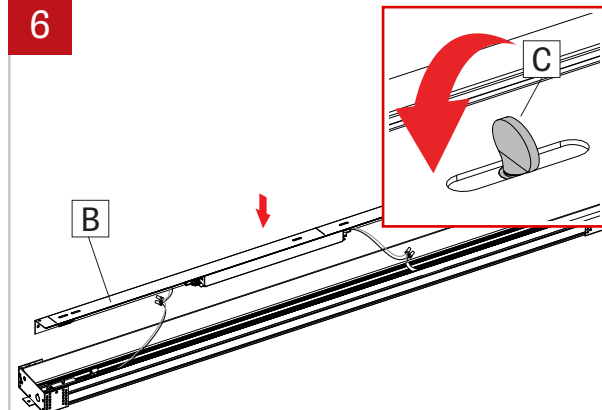

Put back in place the side reflector (B) and secure it by locking back in place the thumbscrew (C).