


PETITE 1" MULTI-APERTURE ROUND RECESSED



The Petite family strikes that perfect balance of compact size, streamlined aesthetics, and high performance. Through their 1" lens apertures, these meticulously engineered downlight, cylinder, and multi-aperture luminaires breathe light into spaces with a quiet, straightforward sophistication.

Array

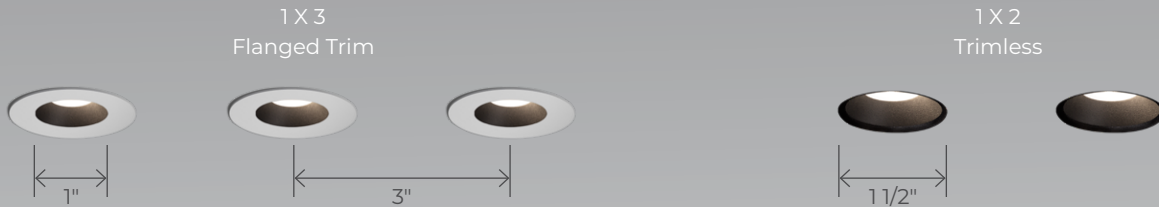

Beam Angles



Light Source



Ceiling Types



Plenum Clearance

As low as 1 3/4"



Petite Family (Refer to other spec sheets)

Downlight



Adjustable



Recessed



Wall Wash

Multi-aperture



Adjustable



Recessed



Wall Wash

Cylinder



Pendant



Surface

PETITE 1" MULTI-APERTURE ROUND RECESSED



Project: _____
Type: _____

Order Guide

LUMINAIRE ID ¹	ARRAY	TRIM STYLE	LENS	CEILING THICKNESS	INSTALLATION TYPE ²	MOUNTING OPTION ⁵
PETIMRR						
PETIMRR - Petite 1" Multi-aperture Round Recessed ¹ Recessed Adjustable and Recessed Wall Wash also available. Consult other spec sheets.	1X2M - 1 X 2 1X3M - 1 X 3	TRM - Flanged trim TRMP - Flush flanged trim drywall mudplate TRMW - Flush flanged trim millwork TLMP - Trimless drywall mudplate TLMW - Trimless millwork GLR - Glow ring	At baffle SDL - Soft diffused lens, Solite NOL - No lens	05IN - Up to 0.5" 1IN - 0.5" - 1"	IC ³ - Type-IC NIC ⁴ - Type Non-IC CP ³ - Chicago Plenum Type-IC (CCEA) ² See page 3 for more details. ³ Up to 7 W. ⁴ Up to 10 W.	ASB - Adjustable standard bar hangers FMB - Flush mount bars ACB - Adjustable commercial bar hangers AHC - Adjustable hat channel bars NA - None ⁵ See page 5 for more details.

LIGHT SOURCE	BEAM	COLOR QUALITY	CRI	COLOR TEMPERATURE
SW - Static white	35DEG - 35° Narrow flood 45DEG - 45° Flood 60DEG ^{6,7} - 60° Wide flood ⁶ Only available with TLMP and TLMW trim options. ⁷ Not available with SDL lens option. ⁸ Not available with TLMP and TLMW trim options.	2STP - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse	90CRI - 90 CRI 95CRI - 95 CRI 80CRI - 80 CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K
SOLA - Dim-to-warm single channel control DUO - Tunable white 2-channel control	45DEG ⁹ - 45° Flood 60DEG ^{6,7} - 60° Wide flood	3STP - 3 Step MacAdam Ellipse	90CRI - 90 CRI	<u>SOLA</u> 30K18K - 3000K to 1800K 27K18K - 2700K to 1800K <u>DUO</u> 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K

DRIVER ⁹	VOLTAGE	WATTAGE PER LIGHT	DIMMING ¹³	BAFFLE FINISH Specify NA for Glow ring	TRIM FLANGE FINISH Specify NA for Glow ring and Trimless
INTEGRAL ¹⁰ ⁹ A driver provided per light. ¹⁰ Access above the ceiling is required. ¹¹ A remote driver box is provided, see page 4 for details.	120V - 120V 277V - 277V UNV - 120V-277V	7W - 7 W output, up to 605 lm 10W ¹² - 10 W output, up to 798 lm ¹² Not available with IC/CP. <u>SOLA</u> 10W ¹² - 10 W output, up to 387 lm	D1 - 1% 0-10V ELV ¹⁴ - ELV 120V TRI ¹⁴ - TRIAC 120V ELD1 - eldoLED 1% ECOdrive 0-10V ELD0 - eldoLED 0.1% SOLOdrive 0-10V PEQ0 ¹⁵ - Lutron Hi-lume Premier 0.1% EcoSystem ¹³ PoE (Power-over-Ethernet) compatible. ¹⁴ Available with 120V only. ¹⁵ On-site commissioning is required.	FTMW - Textured matte white FTMB - Textured matte black FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL# NA - Not applicable	FTMW - Textured matte white FTMB - Textured matte black FSPC - Specular FSSPC - Semi-specular FCHP - Champagne CF# - Custom finish, specify RAL# NA - Not applicable
REMOTE ¹¹	DO NOT SPECIFY FOR REMOTE. SEE "REMOTE DRIVER BOX" SECTION BELOW.				

Remote Driver Box

Ordered separately. Specify each required remote driver box on a separate line.

REMOTE DRIVER ¹⁶	LUMINAIRE QTY.	LUMINAIRE ID	VOLTAGE	WATTAGE PER LIGHT	DIMMING
		PETIMRR			
RDB# - Remote driver box ¹⁶ Specify an RDB number (#) for each required remote driver box. ¹⁷ Not available with RLDE1 or DUO. ¹⁸ Only available with 1 X 2 array. ¹⁹ Only available with 1 X 3 array.	2X ^{17,18} - 2 luminaires 3X ^{17,19} - 3 luminaires	PETIMRR - Petite 1" Multi-aperture Round Recessed	120V - 120V 277V - 277V UNV - 120V-277V 347V ²⁰ - 347V ²⁰ Available with RDI driver only. Please consult factory.	7W - 7 W output, up to 605 lm 10W ²¹ - 10 W output, up to 798 lm ²¹ Not available with IC/CP. <u>SOLA</u> 10W ²¹ - 10 W output, up to 387 lm <u>DUO</u> 7W - 7 W output, up to 227 lm	RDI - 1% 0-10V RELV ²² - ELV 120V RTRI ²² - TRIAC 120V RLDE1 ²³ - Lutron Hi-lume 1% Eco RDA ²³ - DALI ²² Available with 120V only. ²³ On-site commissioning is required. ²⁴ For emergency battery, code will be like the following example: RDI+EB. <u>DUO</u> RSDI - Single 0-10V input RSELV ²² - ELV 120V RSTRI ²² - TRIAC 120V RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V RPEQ0 ²³ - Lutron Hi-lume Premier 0.1% EcoSystem +EB ²⁴ - Emergency battery RDDI - Dual 0-10V input for CCT/intensity RPSQ0 ²³ - Lutron T-Series 1% tunable white

EXAMPLE CODE: **LIGHT** PETIMRR-1X2M-TRM-SDL-1IN-IC-ASB-SW-35DEG-2STP-90CRI-35K-REMOTE-FTMW-FTMW **REMOTE DRIVER** RDB1-2X-PETIMRR-120V-7W-RDI



PETITE 1" MULTI-APERTURE ROUND RECESSED




Installation Types


IC - Type-IC / NIC - Type Non-IC / CP - Chicago Plenum Type-IC (CCEA)		
INTEGRAL	1X2M - 1 X 2 	1X3M - 1 X 3
REMOTE	1X2M - 1 X 2 	1X3M - 1 X 3

- For integral, access above the ceiling is required.
 - For dimension B, see the PLENUM CLEARANCE table below.

PLENUM CLEARANCE




IC/CP - Insulated ceiling



NIC* - Non-insulated ceiling
 * No insulation within 3" of the fixture.

CUT-OUT DIMENSIONS

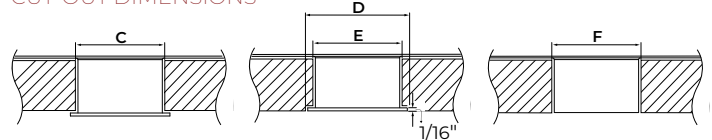

TRM - TRMP - TLMP - GLR

TRMW

TLMW

PLENUM CLEARANCE HEIGHT AND CEILING THICKNESS					
		IC/CP		NIC	
A	Ceiling thickness	1IN	0.5IN	1IN	0.5IN
B	Integral	2 1/8" (FMB) 4" (ASB, ACB, AHC)		2 5/8" (FMB) 4" (ASB, ACB, AHC)	
	Remote	1 3/4" (FMB) 4" (ASB, ACB, AHC)	2 1/8" (FMB)	2 1/4" (FMB) 4" (ASB, ACB, AHC)	2 5/8" (FMB)


CUT-OUT DIMENSIONS				
		Drywall	Acoustic tile	Millwork
C	TRM	Ø 1 11/16"		N/A
	TRMP / TLMP	Ø 1 11/16"	N/A	
	GLR	Ø 1 11/16"		
D	TRMW	N/A		Ø 1 13/16"
E		N/A		Ø 1 11/16" with 1/16" lip
F	TLMW	N/A	Ø 1 11/16"	

PETITE 1" MULTI-APERTURE ROUND RECESSED




REMOTE DRIVER BOX


RDBCS



RDBCM




RDBCL




DRIVER	RDB	# DRIVERS
RD1	RDBCS	1X
RSD1	RDBCM	2X
	RDBCL	3X
RELV	RDBCS	1X
RTRI		
RDA		
RELD0		
RELD1	RDBCM	2X, 3X
RPEQ0		
RSELV		
RSTRI		


RDB18 / RDB24



RDB24W



DRIVER	RDB	A	B
RLDE1	RDB18	20"	18"
RDMX	RDB24	26"	24"
RDDA			
RDDA8			
RDD1			
RPSQ0	RDB24W	26"	24"
RD1+EB			
RELV+EB			
RTRI+EB			
RPEQ0+EB	RDB24W	26"	24"
RLDE1+EB			
RDA+EBI			
RELD1+EB			
RELD0+EB			

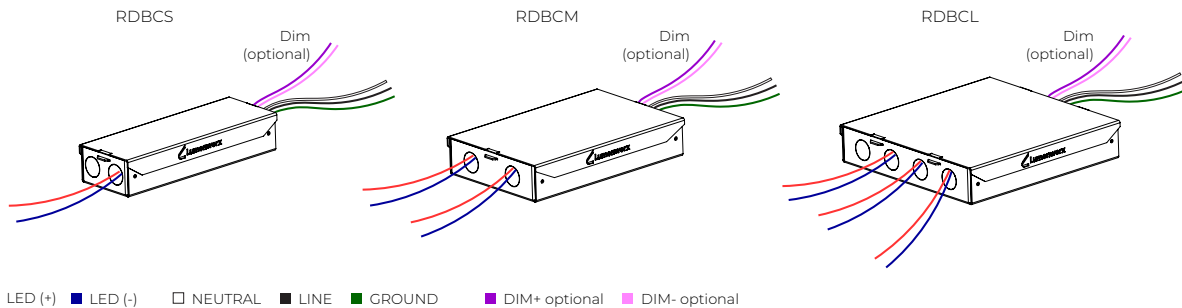


PETITE 1" MULTI-APERTURE ROUND RECESSED




Mounting Options

ASB - Adjustable Standard Bar Hangers

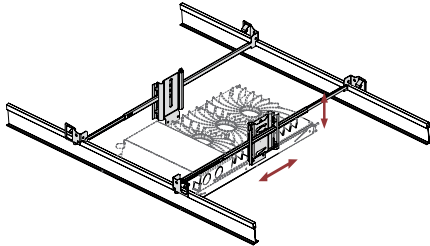


Adjustable Standard Bar hangers can be used in both commercial and residential applications and are adjustable to various heights in both Grid Ceiling and Drywall mounting. ASB hangers are less rigid and versatile than ACB hangers.

FMB - Flush Mount Bars

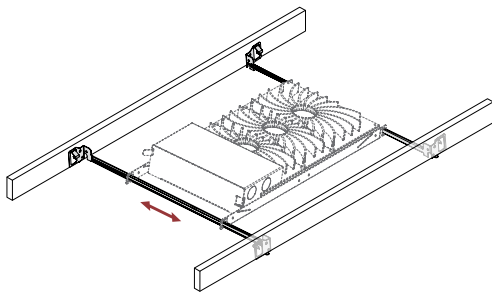

Flush Mount Bars are best used in residential applications, fitting snug to the surface and suitable for Wood, Metal, and Drywall mounting. The flush mounted bars are static and can't be adjusted.


ACB - Adjustable Commercial Bar Hangers

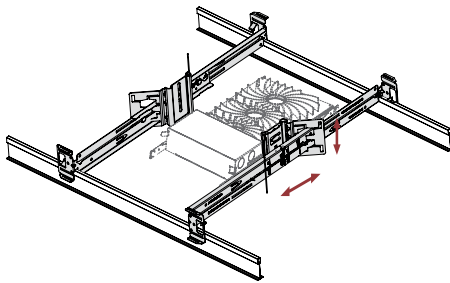

Adjustable Commercial Bar hangers can be used in both commercial and residential applications and are by far the most versatile mounting bar we offer with its adjustability to various heights. ACB hangers are suitable for Grid Ceiling, Drywall, Metal, Wood and Frame mounting.

- Extremely rigid
- Fits into C-Channel notches in a Butterfly Bracket

AHC - Adjustable Hat Channel Bars

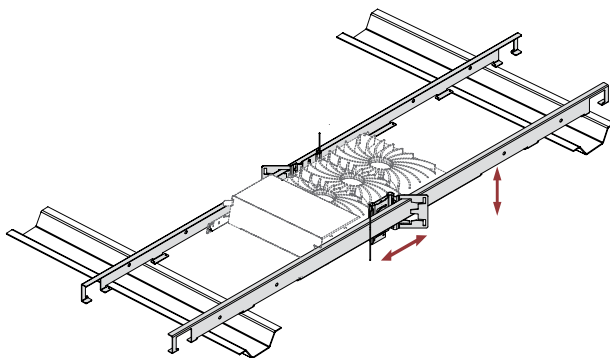


Adjustable Hat Channel bars can be used in both commercial and residential applications and come with a butterfly clip to adjust to various heights. AHC bars can be hung downward by 90 degrees in vertical position, and once wired, can be shifted onto the horizontal mounting plane. AHC bars are suitable for both Drywall and wood ceiling applications.

PETITE 1" MULTI-APERTURE ROUND RECESSED



Trim Style

Lens

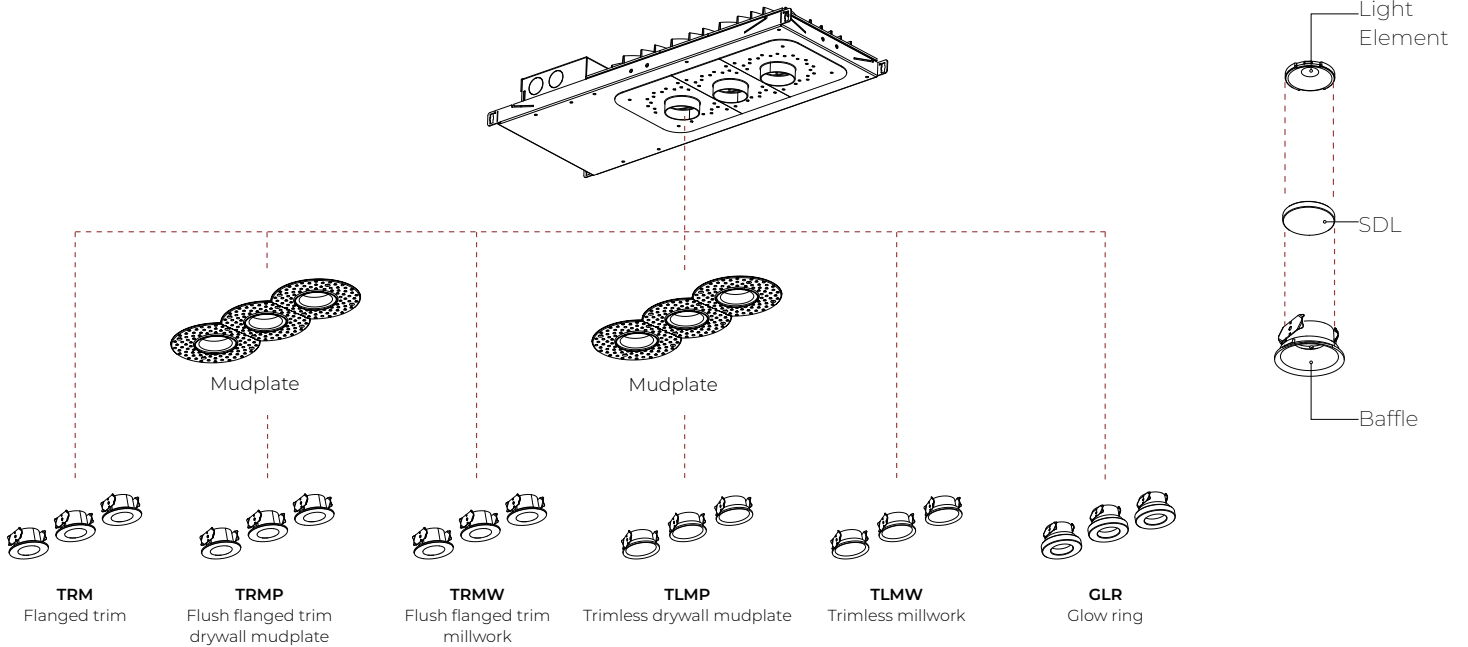


TRM Flanged Trim	TRMP / TRMW Flush Flanged Trim	TLMP / TLMW Trimless Millwork	GLR Glow Ring

PETITE 1" MULTI-APERTURE ROUND RECESSED



Color Quality


COLOR QUALITY - 3500K	
TM-30 R _r	91
TM-30 R _g	100
CRI	90
R9	> 50



Photometrics


STATIC WHITE

Values calculated based on 3500K, 90 CRI, and with no lens. The light distribution will vary depending on trim style and baffle finish. All values are per light.




35DEG - 35° Narrow flood

WATTAGE		7 W		10 W		14 W		16 W	
Trim style	Baffle finish	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W
Trim	White	480	69	633	63	852	61	923	58
	Black, Champagne	392	56	517	52	696	50	754	47
	Specular, Semi-specular	458	65	604	60	813	58	881	55
Trimless	White	538	77	709	71	954	68	1033	65
	Black, Champagne	495	71	652	65	878	63	951	59
	Specular, Semi-specular	534	76	705	70	948	68	1028	64
Glow ring		486	69	641	64	863	62	935	58



45DEG - 45° Flood

WATTAGE		7 W		10 W		14 W		16 W	
Trim style	Baffle finish	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W
Trim	White	509	73	671	67	904	65	979	61
	Black, Champagne	412	59	543	54	731	52	792	50
	Specular, Semi-specular	488	70	643	64	866	62	938	59
Trimless	White	605	86	798	80	1074	77	1163	73
	Black, Champagne	522	75	688	69	926	66	1003	63
	Specular, Semi-specular	576	82	759	76	1022	73	1107	69
Glow ring		490	70	646	65	869	62	942	59



60DEG - 60° Wide flood

WATTAGE		7 W		10 W		14 W		16 W	
Trim style	Baffle finish	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W
Trimless	White	381	54	502	50	675	48	732	46
	Black, Champagne	296	42	391	39	526	38	570	36
	Specular, Semi-specular	339	48	447	45	601	43	651	41

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. CCT, CRI, and lensing will change the lumen value.

CCT		CRI		LENS	
2700K	0.91	80 CRI	1	SDL - Soft diffused lens, Solite	0.91
3000K	0.96	90 CRI	1	NOL - No lens	1
3500K	1	95 CRI	0.77		
4000K	1.01				


PETITE 1" MULTI-APERTURE ROUND RECESSED



Photometrics

SOLA/DUO

Values calculated based on with no lens. The light distribution will vary depending on baffle finish and trim style. All values are per light.




45DEG - 45° Flood

SOLA

WATTAGE			10 W		14 W	
CCT	Trim style	Baffle finish	lm	lm/W	lm	lm/W
3000K	Trim	White	327	33	435	31
		Black, Champagne	265	26	352	25
		Specular, Semi-specular	313	31	416	30
	Glow ring		314	31	417	30
2700K	Trim	White	327	33	435	31
		Black, Champagne	265	26	352	25
		Specular, Semi-specular	313	31	416	30
	Glow ring		314	31	417	30

DUO

WATTAGE			7 W	
CCT	Trim style	Baffle finish	lm	lm/W
6000K	Trim	White	192	27
		Black, Champagne	149	21
		Specular, Semi-specular	168	24
Glow ring		194	28	
5000K	Trim	White	192	27
		Black, Champagne	149	21
		Specular, Semi-specular	168	24
Glow ring		194	28	
2700K	Trim	White	168	24
		Black, Champagne	130	19
		Specular, Semi-specular	147	21
Glow ring		161	23	



60DEG - 60° Wide flood

SOLA

WATTAGE			10 W		14 W	
CCT	Trim style	Baffle finish	lm	lm/W	lm	lm/W
3000K	Trimless	White	387	39	514	37
		Black, Champagne	314	31	417	30
		Specular, Semi-specular	371	37	493	35
2700K	Trimless	White	387	39	514	37
		Black, Champagne	314	31	417	30
		Specular, Semi-specular	371	37	493	35

DUO

WATTAGE			7 W	
CCT	Trim style	Baffle finish	lm	lm/W
6000K	Trimless	White	227	32
		Black, Champagne	177	25
		Specular, Semi-specular	199	28
5000K	Trimless	White	227	32
		Black, Champagne	177	25
		Specular, Semi-specular	199	28
2700K	Trimless	White	199	28
		Black, Champagne	155	22
		Specular, Semi-specular	174	25

MULTIPLIERS

Please follow the multiplier table to ensure correct lumen value. Lensing will change the lumen value.

LENS

SDL - Soft diffused lens, Solite	0.91
NOL - No lens	1

PETITE 1" MULTI-APERTURE ROUND RECESSED



Technical Specifications

OPTIC

The CircaFlex™ Optic uses advanced beam-splitting technology to allow light to follow an intended optical path with maximal precision, minimal spread, and even distribution.

LIGHT SOURCE

Static white

Compact COB (Chip-On-Board) LED module, available in 2700K, 3000K, 3500K and 4000K with a choice of 80 CRI, 90 CRI, or 95 CRI, with elevated R9 value for 90 CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency > 84%, PF > 0.9, THD < 20%.

Integral: 0-10V, ELV, TRIAC, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, Lutron Hi-lume Premier 0.1% EcoSystem

Remote: 0-10V, ELV, TRIAC, Lutron Hi-lume 1% Eco, DALI, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, Lutron Hi-lume Premier 0.1% EcoSystem, DMX, Lutron T-series (tunable white)

Emergency battery option: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

PoE: Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire, or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing: For new construction, 20 gauge powder coated steel. 18 gauge galvanized steel junction box with ½" trade size knockouts. Adjustable hanger bars and butterfly brackets are included.

Adjustable commercial hat channel and flush mounted brackets are also available.

Baffle: Die-cast aluminum mounted with retaining spring clips

Glow ring: Acrylic

Heat sink: Die-cast aluminum

WEIGHT

	1 X 2	1 X 3
Integral	5.1 lbs - 2.3 kg	6.2 lbs - 2.8 kg
Remote	3.2 lbs - 1.4 kg	4.2 lbs - 1.9 kg

LENS



Soft diffused lens, Solite

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees)

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Chicago Plenum: City of Chicago approved (CCEA) when specified with CP installation type option.

IC rated: Suitable for direct contact with insulation when specified with IC or CP installation type options.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.