



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

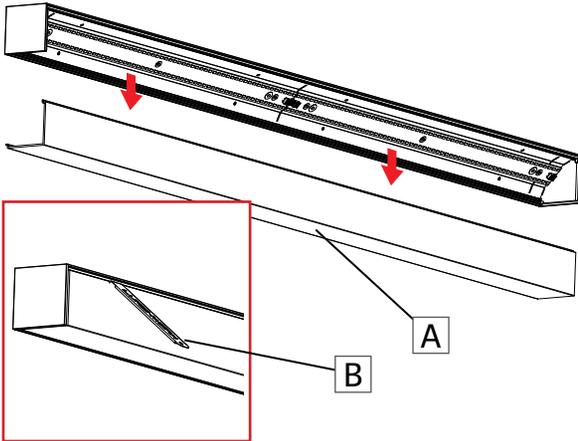


Remove the lens (A) using the included lens tool (B).

2

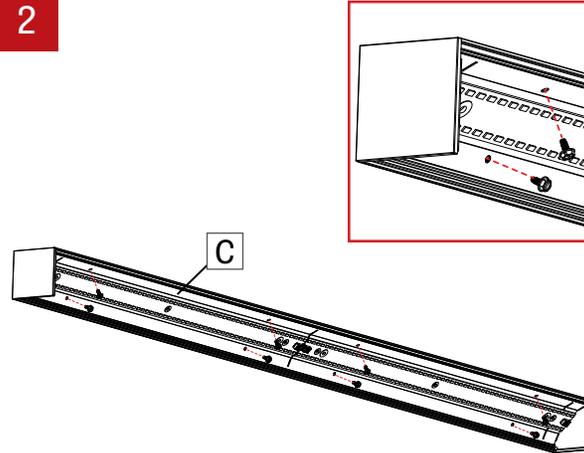


Unscrew the cartridge (C) and keep the screws in a safe place.

3

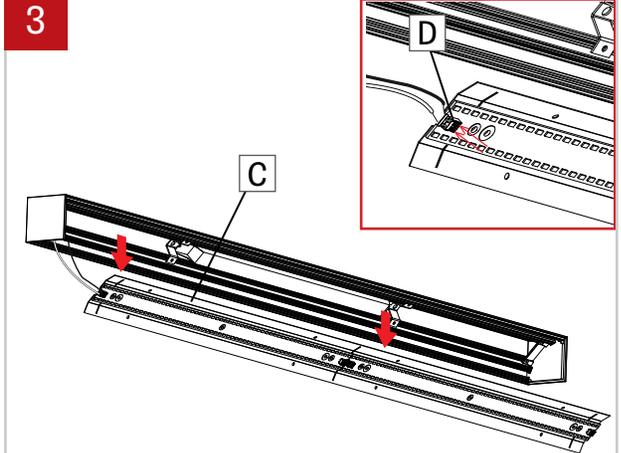


Disconnect LED mox connector (D) by taking a pointed object and pressing on the two tabs on the top. Remove the cartridge (C) and keep it in a safe place.

4

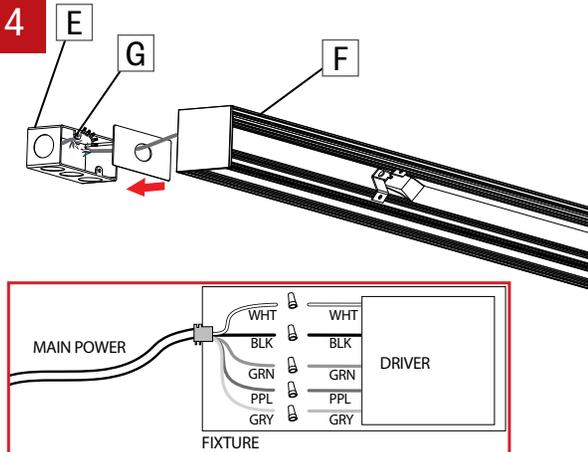


Make the electrical connections on the J-Box (E) between the fixture (F) and the main power (G) (connect the wires with the same colors together).
Number of wires may vary.

5

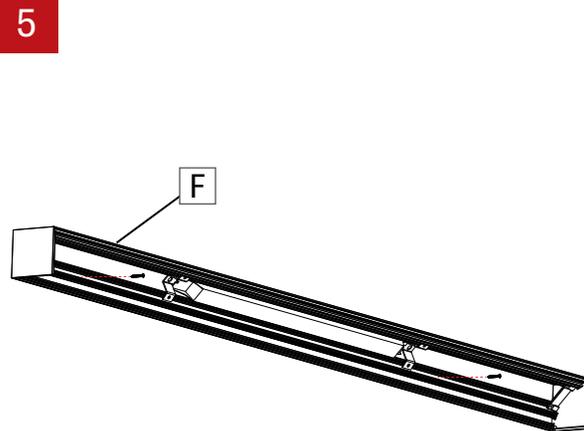

Fix the fixture (F) to the wall by screwing it directly to the wall. Align the screws (by other) with the studs inside the wall.

6

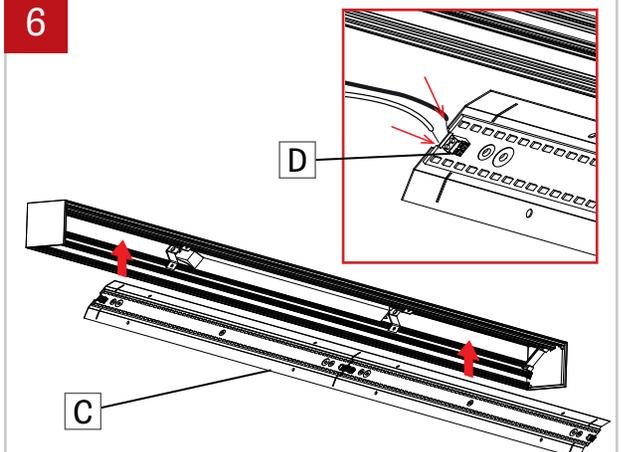

Put back the reflector (C) in place and reconnect the wires to the LED mox connectors (D).

7

Reinstall the cartridges (C) by using the provided screws. **Do not apply too much pressure.**

8

Put the lens (A) back in place.

9 CONTINUOUS SYSTEM

Follow steps 1 to 5 for the first fixture (E) on the run and steps 1 to 3 for second fixture (G) in the run. Join the two fixture by using provided screws (H).

10

Fix the second fixture (G) to the wall by screwing it directly to the wall. Align the screws (by other) with the studs inside the wall.

11

Make electrical connections between the two fixture by using quick connectors (I).

12

Put back the reflectors (C) in place and reconnect the wires to the LED molx connectors (D).

13

