

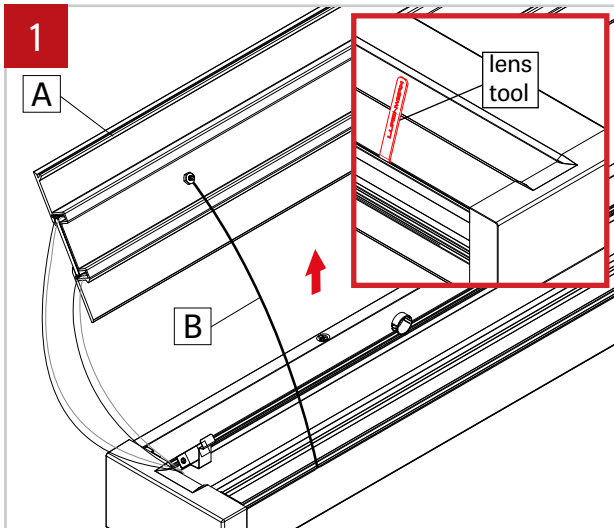


**NOTE: Wire dimming conductors as Class 1**


Lift the top cartridge (A) up with the included lens tool and drop it gently. The safety cables (B) support the top cartridge (A).

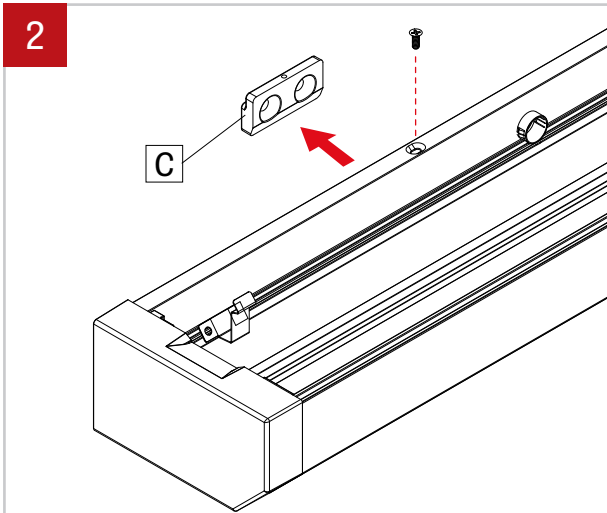


Unscrew and remove the brackets (C) from the fixture.

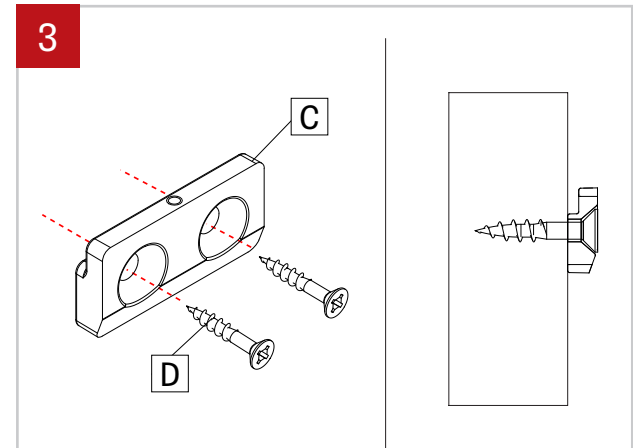


Fix the bracket (C) into wall with supplied wood screws (D) into wood stud.

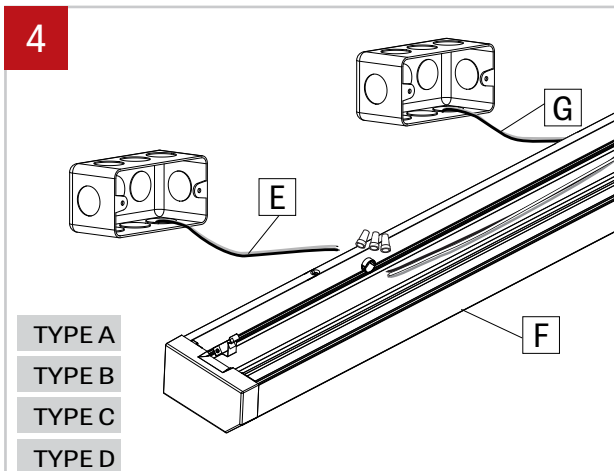

Insert the main power (E) inside the fixture (F). According to the type, make electrical connection between fixture (F) and the wall power cable (E) then connect the control wires (G) (when is the case) following the schematic diagram.

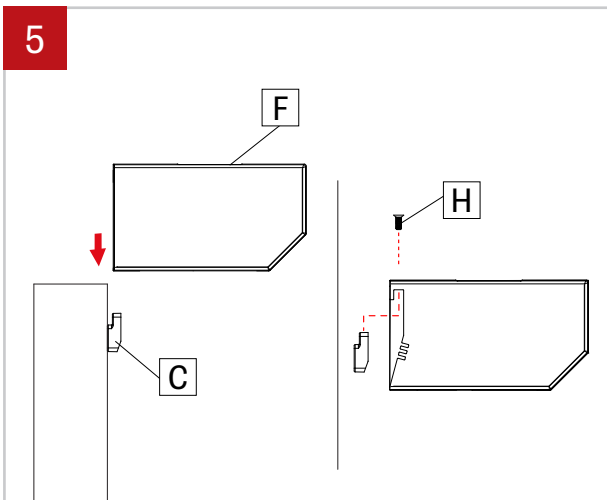

Insert the fixture (F) into the bracket (C) and secure it with supplied screws (H).

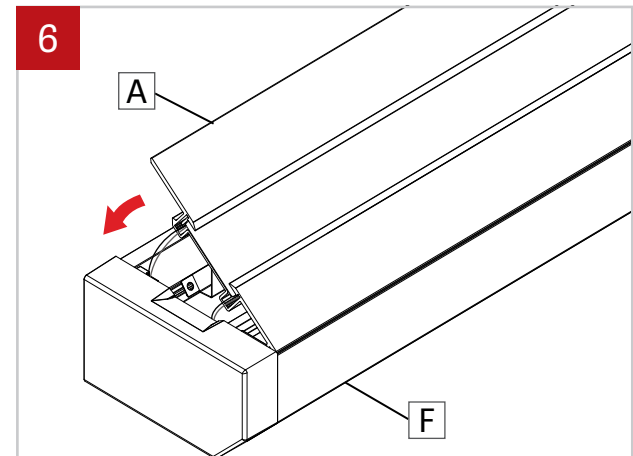

Insert the top cartridge (A) into the fixture. Make sure that all wires should be inside the fixture (F).