

# PIVOT

## TRACK - SURFACE



### DESCRIPTION

Pivot is an architectural 48V linear magnetic track lighting system for surface mounting. The Surface Track is low voltage and accommodates the Pivot Track Modules. It possesses infinite run capabilities in segments of up to 8 feet with smooth transitions at the joint. It can also be branched out horizontally to create a multitude of shapes, patterns, and effects for various architectural applications. The Track is offered in different circuit and control channel variations.



Project:

Type:


Track

Example: PIVS-CR-9FT6IN(2X3FT-1X3FT6IN)-NA-120V-RD1-USC-1C1CCUD-NA-DRC-FTMB-BK-NA

A drawing of your pattern is required - anything from a line drawing to an architectural drawing.

LUMINAIRE ID	TRACK TYPE	LUMINAIRE LENGTH <sup>3</sup>	CORNER TYPE <sup>4, 5, 6</sup>	
PIVS				
PIVS - Pivot Surface	<b>CR</b> <sup>1</sup> - Continuous run <b>PAT</b> <sup>2</sup> - Pattern  <sup>1</sup> A straight linear shape with no corners. <sup>2</sup> A shape or pattern containing at least 1 corner.	<b>##FT##IN</b> <b>(#X#FT#IN-#X#FT#IN-...)</b> -  <b>##FT##IN</b> : total nominal length of continuous run or pattern in feet and/or inches (2' or longer) <b>#X</b> : quantity of each section <b>#FT#IN</b> : nominal length of each section in feet and/or inches, specify between 2' and 8'  <sup>3</sup> Consult the Maximum Track Wattage table on page 3 to determine the maximum load allowed per section.	<b>#V</b> - 2-way V connection <b>#L</b> - 2-way L connection <b>#Y</b> - 3-way Y connection <b>#T</b> - 3-way T connection <b>#X</b> - 4-way X connection  <b>NA</b> - None <sup>4</sup> Specify number of corners ( <b>#</b> ) for each required corner type. <sup>5</sup> Consult factory for other angles. <sup>6</sup> Corners are unlit.	
VOLTAGE	DIMMING <sup>7</sup>	TRACK CHANNEL	CONTROL CHANNEL <sup>11</sup>	EMERGENCY SECTION
<b>120</b> - 120V <b>277</b> - 277V <b>UNV</b> - 120V-277V	<b>RND</b> - Non-dimming <b>RD1</b> - 1% 0-10V <b>RDA</b> <sup>8</sup> - DALI <b>RLECS</b> <sup>8, 9, 10</sup> - Lutron EcoSystem  <sup>7</sup> Drivers are remote. A remote driver box is provided. <sup>8</sup> On-site commissioning is required. See page 6 for details. <sup>9</sup> Only available with USC, 1 circuit, and 1 control channel option (1C1CCUD). <sup>10</sup> Comes with a control box that must be installed remotely.	<b>USC</b> - Unified single channel <b>DUC</b> - Dual channel	<b>1C1CCUD</b> - 1 circuit, 1 control channel (USC) <b>1C2CCDD</b> - 1 circuit, 2 control channels (DUC channel 1 - DUC channel 2) <b>2C2CCDD</b> - 2 circuits, 2 control channels (DUC channel 1 - DUC channel 2)  <sup>11</sup> For more details, please see the circuit and channel specification below.	<b>EC</b> <sup>12</sup> - Emergency light section <b>NA</b> - None  <sup>12</sup> Consult factory.
MOUNTING	OUTSIDE FINISH <sup>13</sup>	INSIDE FINISH	OPTIONS	
DRC				
DRC - Drywall ceiling	<b>FTMB</b> - Textured matte black <b>FTMW</b> - Textured matte white <b>CF#</b> - Custom finish, specify RAL#  <sup>13</sup> See page 5 for more finish options.	<b>BK</b> - Black <b>WH</b> - White	<b>FU120</b> - Fuse 120V <b>FU277</b> - Fuse 277V <b>NA</b> - None	


### Circuit and channel specification

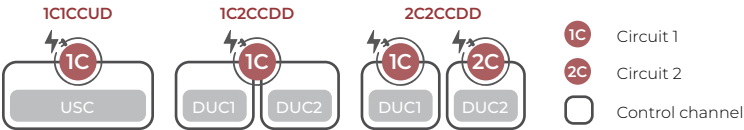

## Track details

Use the grid below to sketch and label the layout of your Pivot track.


- Build your continuous run or pattern using track sections of 2' to 8'.
- The total wattage of all the modules installed in a track section must not exceed the maximum track wattage per section length (see table). Consult the Pivot Module spec sheet for the wattages of each module.
- Corners are unlit.
- Track length is not field adjustable.

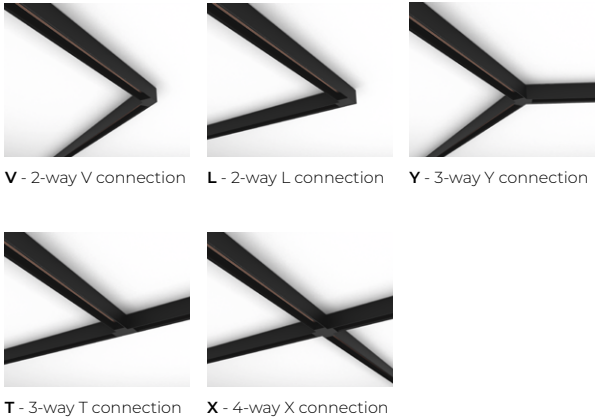

**Maximum Track Wattage \***  
at 3500K at 80 CRI  
**! Do not exceed the maximum wattage allowed per section of track.**


LENGTH	USC	DUC	
		Channel 1	Channel 2
2FT	24 W	12 W	12 W
3FT	36 W	18 W	18 W
4FT	48 W	24 W	24 W
5FT	60 W	30 W	30 W
6FT	72 W	36 W	36 W
7FT	84 W	42 W	42 W
8FT	96 W	48 W	48 W

### Pattern example




1. Specify the **TOTAL LUMINAIRE LENGTH** in feet and/or inches.  
Example: 28FT(7X4FT)
2. Specify the quantity of each **CORNER TYPE**.  
Example: 4L-2T

\* To determine the maximum wattage allowed per section of track, multiply the length of your section by 12 W/ft.

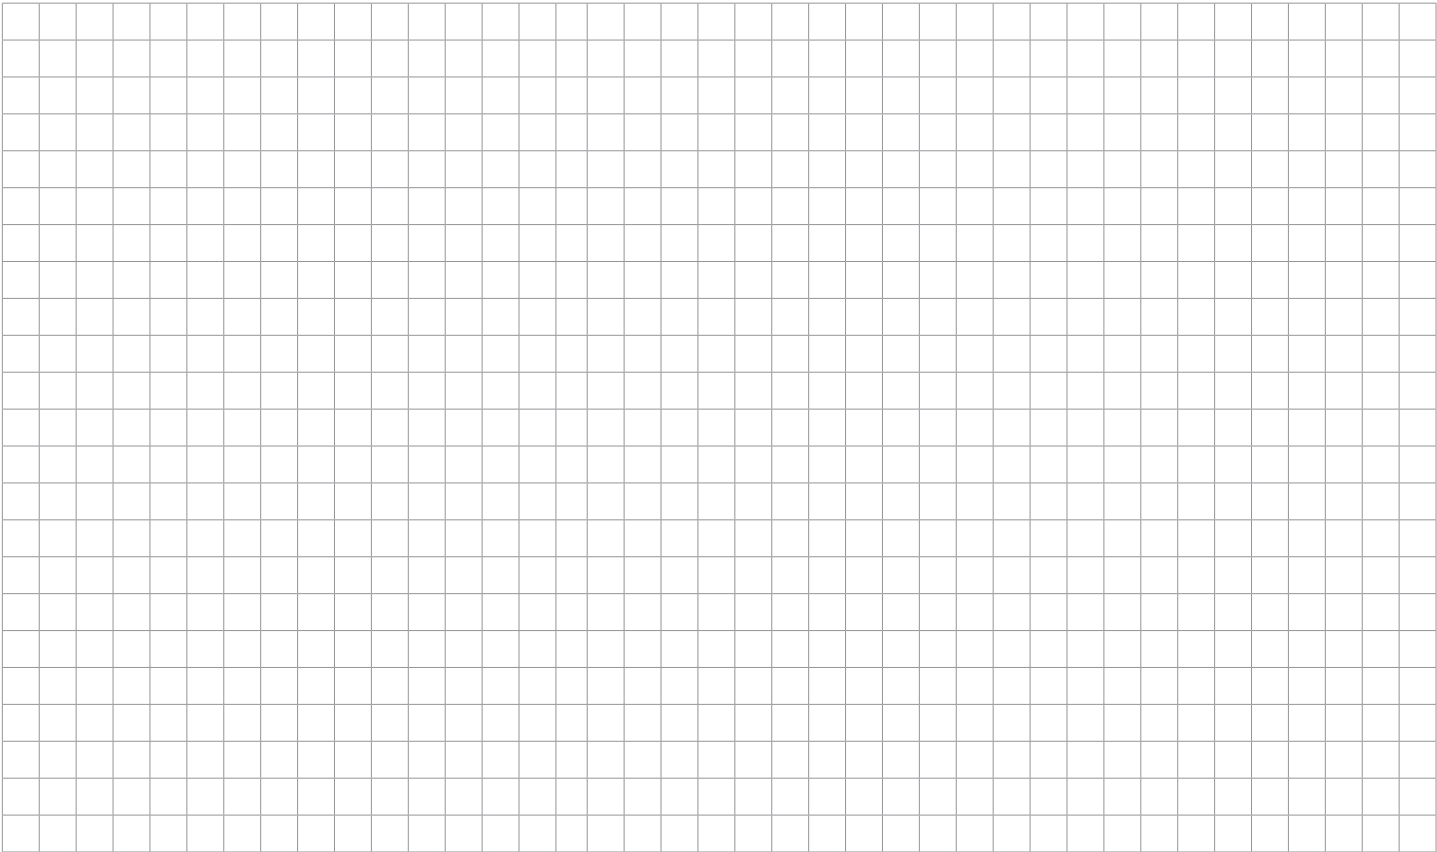


## Dimensions

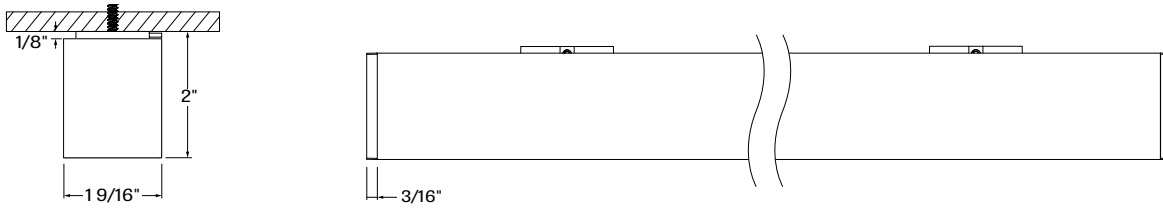


**PIVS** - Pivot Surface


## Corner Type




**V** - 2-way V connection




**L** - 2-way L connection



**Y** - 3-way Y connection




**T** - 3-way T connection



**X** - 4-way X connection

## Finishes


### Standard

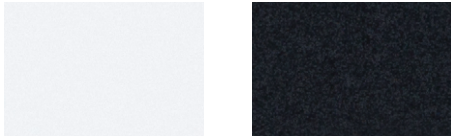

**FTMW** - Textured Matte White **FTMB** - Textured Matte Black

### Custom

#### Neutrals

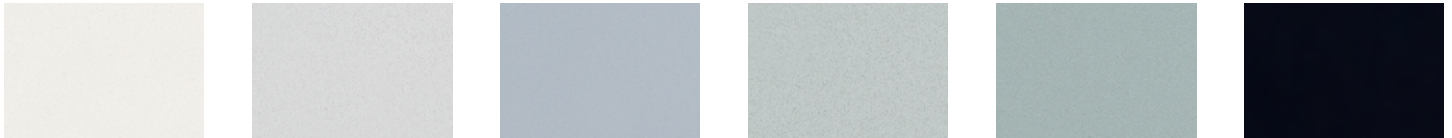

**CRM** - Cream

**GRY** - Gray


**STG** - Steel Gray

**SAG** - Sage Gray

**MOG** - Moss Gray

**BLB** - Black Blue

#### Designer

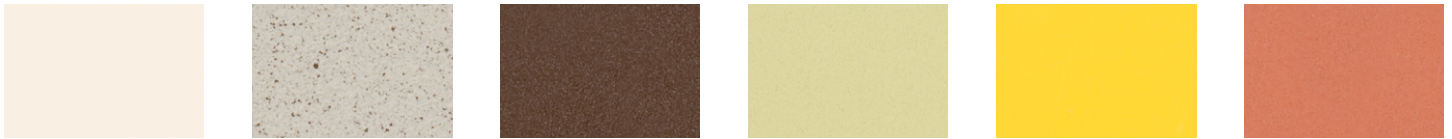

**ALM** - Almond

**QRZ** - Quartzite Texture

**RST** - Rust Fine Texture

**GRB** - Green Beige

**YLW** - Yellow

**SLM** - Salmon Pink



**VIO** - Pastel Violet



**RED** - Red



**PRR** - Purple Red



**SMB** - Storm Blue



**DPB** - Deep Blue



**OCB** - Ocean Blue



**BLG** - Blue Green



**GNS** - Green Smoke



**MNG** - Mint Green




**LMG** - Lime Green

#### Metallics



**CHP** - Champagne



**GLD** - Gold




**DGD** - Dark Gold



**IRN** - Iron Ore



**CNY** - Canyon



**SBP** - Sandblast Copper



**SWD** - Sandalwood

Some colors may have longer lead time.

## Technical Specifications

### LUMINAIRE LENGTH

Pivot track is available as either as a continuous run (straight linear shape with no corners) or as a pattern (shape or pattern containing at least 1 corner). It is built using track sections of 2' to 8'. The total nominal length must be specified in the product code, as well as the quantity and nominal length of each section. Lengths can be ordered in 1 foot increments. The track length is not field adjustable.

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.



### ELECTRICAL

The Pivot track is powered by an integral (except for Surface) 48VDC, Class 2, SELV power supply with universal (120-277VAC) input. Rated lifetime of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>90%, PF>0.9, THD<20%. The power supply is coupled to a proprietary dimming interface which allows one or both track channels to be controlled together or independently using a 0-10V or DALI signal. Both the power supply and the dimming interface can be serviced from below. For applications requiring Lutron Ecosystem control, a separate, remote interface can be provided to translate Ecosystem to 0-10V.

### DALI

A maximum of 64 DALI devices is permitted on a single DALI line. Please note that each Pivot track section consists of a minimum of 2 DALI devices with the possibility of up to 4 DALI devices depending on control channel and circuit selection. Please consult factory for additional details.


### MOUNTING

Fixtures can be mounted directly to drywall and hard surface ceilings, hardware supplied by others.

### FINISH

**Outside:** Standard powder-coat paint available in textured matte white and black. Custom colors are also available in over 30 colors.

**Inside:** White or black



### CONSTRUCTION

**Track housing:** Extruded aluminum, up to 90% recycled content

**Joining system:** Die cast zinc

**Blank cover:** Extruded aluminum

**End cap:** Die cast aluminum

### WEIGHT

**2':** 1.8 lbs - 0.8 kg

**4':** 3.5 lbs - 1.6 kg

**6':** 5.3 lbs - 2.4 kg

**8':** 7.1 lbs - 3.2 kg

### CERTIFICATION

**ETL:** Rated for indoor dry locations. Conforms to UL Standard 1574 and certified to CAN/CSA Standard C22.2 No. 250.0.

### WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.