



IMPORTANT: Installation instructions are shown with POLY 2x2 flush and applies to 1x4 and 2x2 flush and drop

NOTE: Wire dimming conductors as Class 1


1 SINGLE FIXTURE

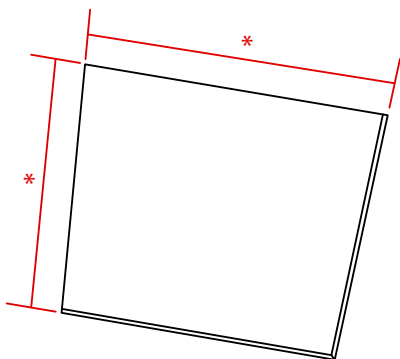


Make sure the power to the fixture is turned off. Cut hole in the drywall according to the dimension [*] given in the client drawings.

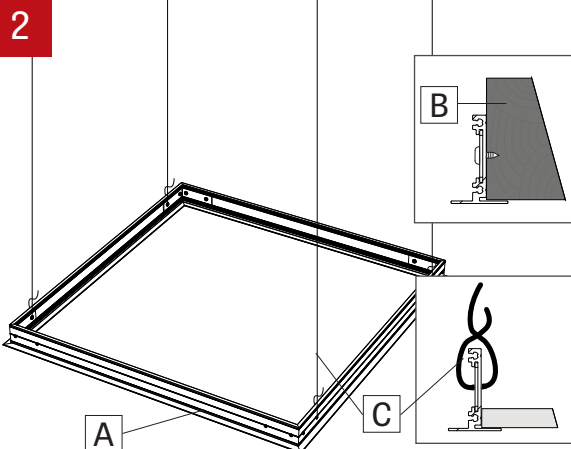


Insert the drywall kit (A) into the hole and attach it to a wooden frame (B) or hang it using hanger wires (C).

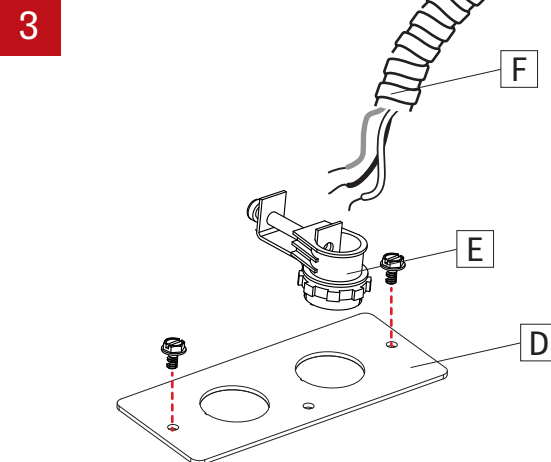


Remove power plate (D) from fixture and install BX connector (E) (by other) and BX cable (F) (by other) through the power plate. Tightened BX connector (E) screw.

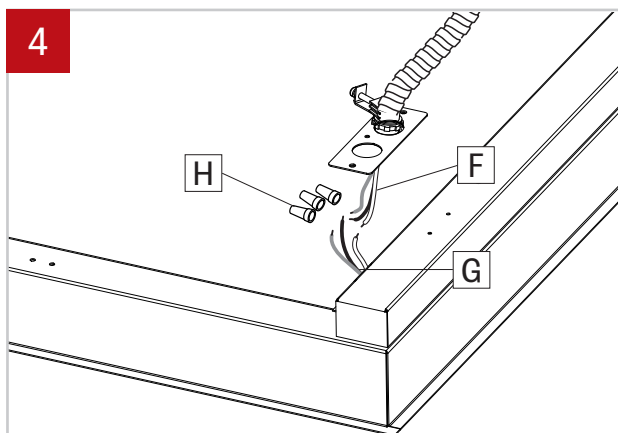



Connect cables from the BX cable (F) to the driver cables (G) using wire nuts (H).

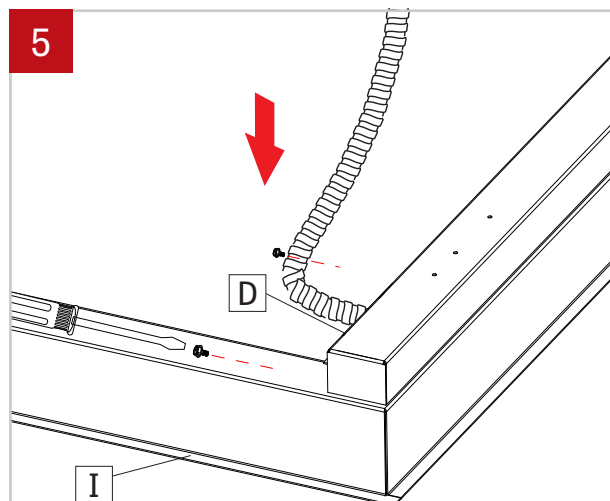



Push connected wires inside the fixture. Reinstall power plate (D) onto fixture (I) by refastening screws to power plate (D) and fixture (I).

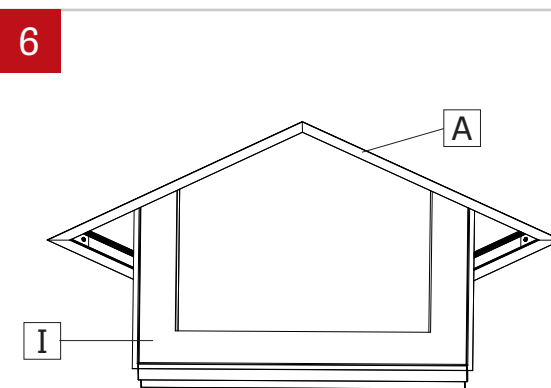

Insert the fixture (I) through the drywall kit (A) as shown.

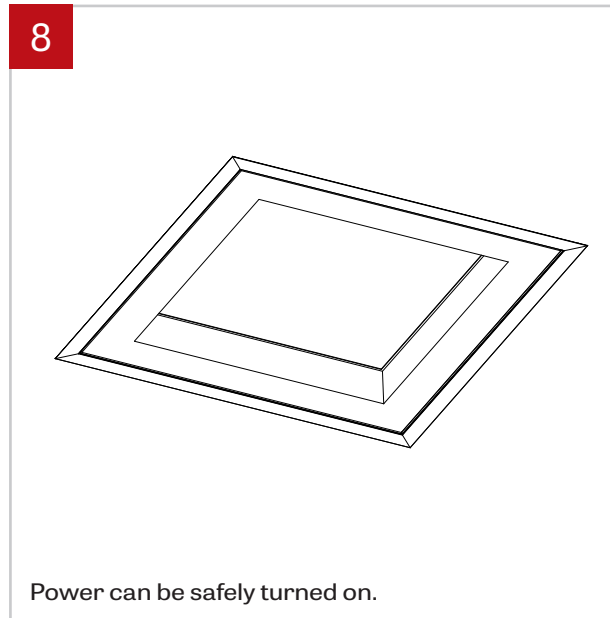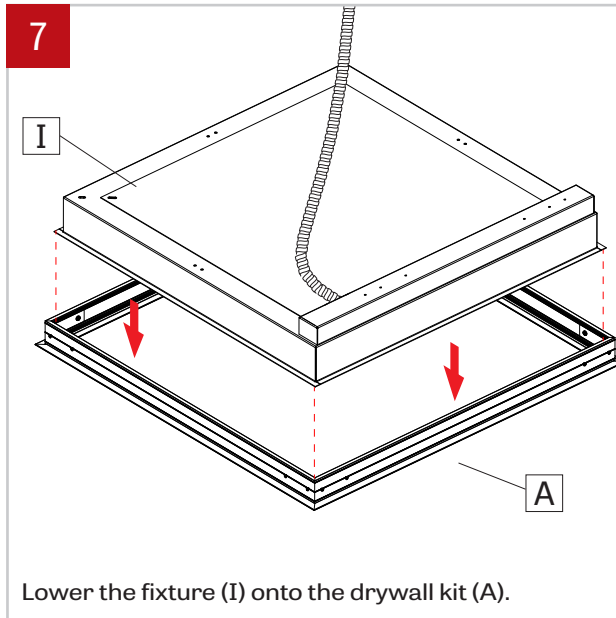

TOP VIEW

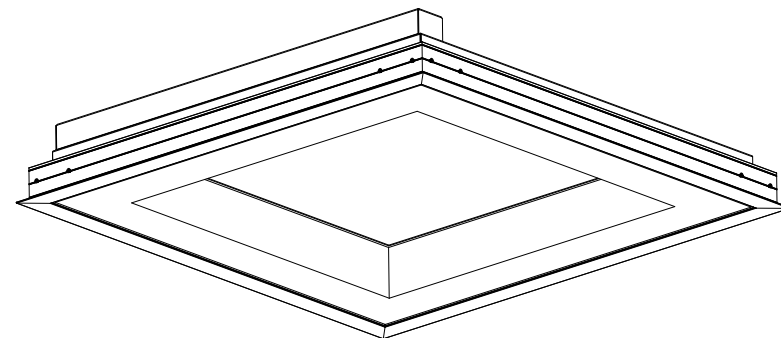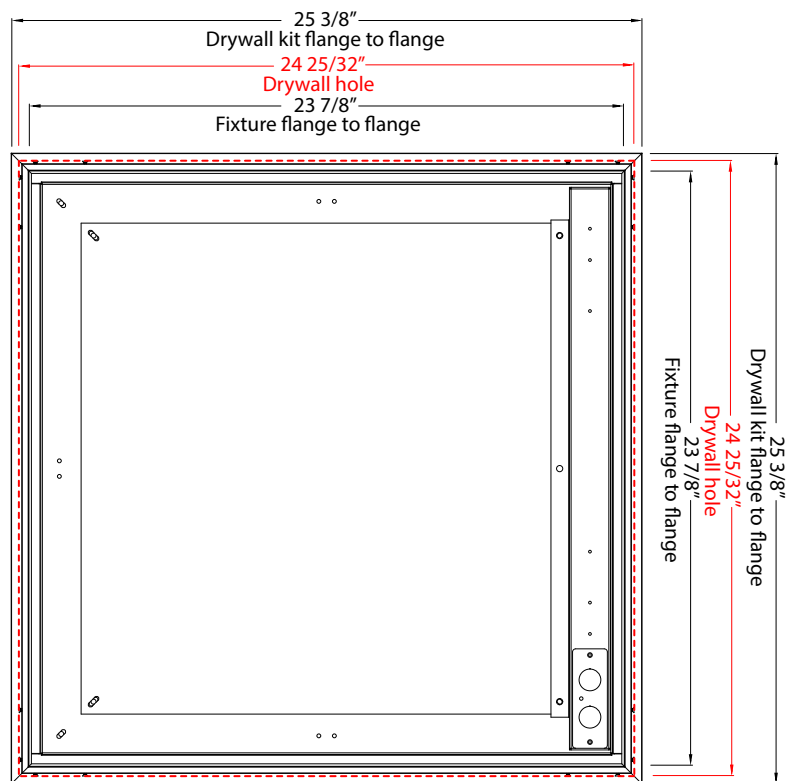

TOP VIEW

