



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

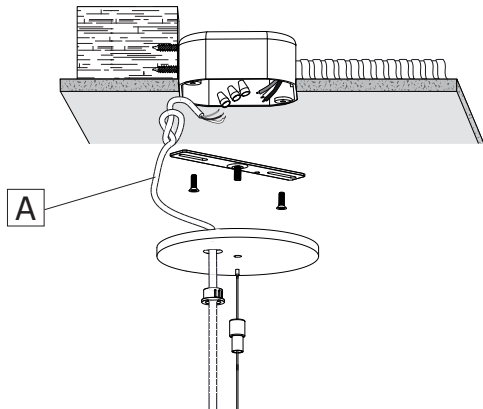


Locate ceiling mounting points according to supplied client drawing. Make a knot in the power cord (A) and then connect it to the ceiling power feed.

2 POWER SIDE

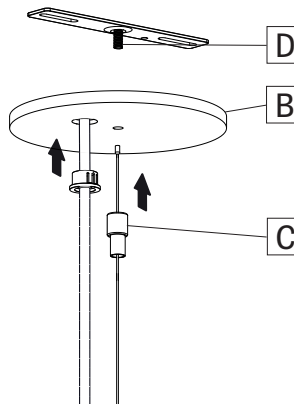


Secure canopy (B) with slip ring (C) on threaded rod (D).

3 NON-POWER SIDE

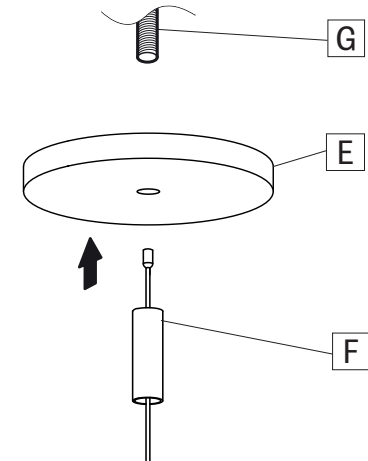


Secure canopy (E) with cable coupler (F) on crimp strud (1/4"-20) (G) (by other).

4

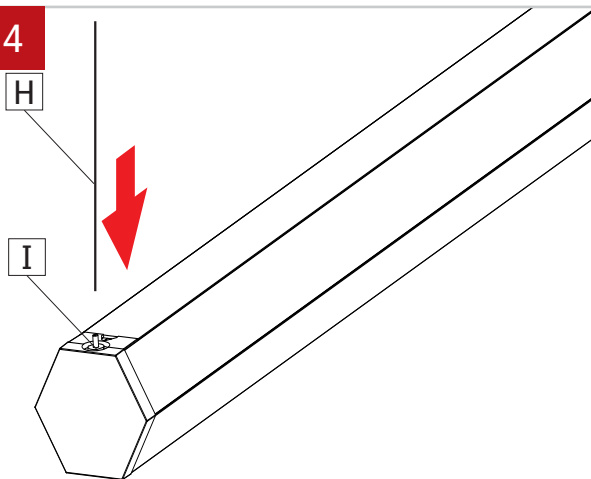


Insert the aircraft cable (H) into the cable gripper (I). Adjust the cable (H) length (cut it if needed). Secure the cable gripper (I) by tightening the safety nut on the gripper.

5

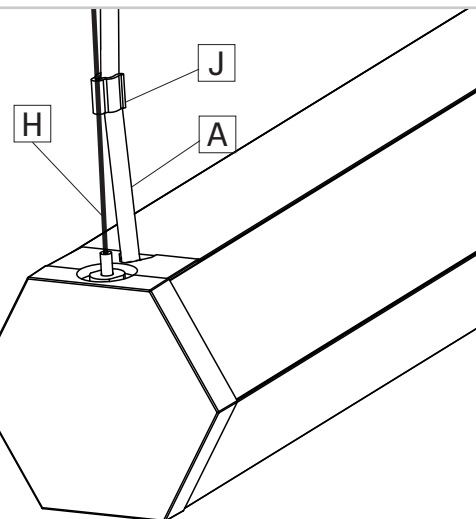

Secure power cord (A) to aircraft cable (H) with plastic clip (J).

6 CONTINUOUS SYSTEM

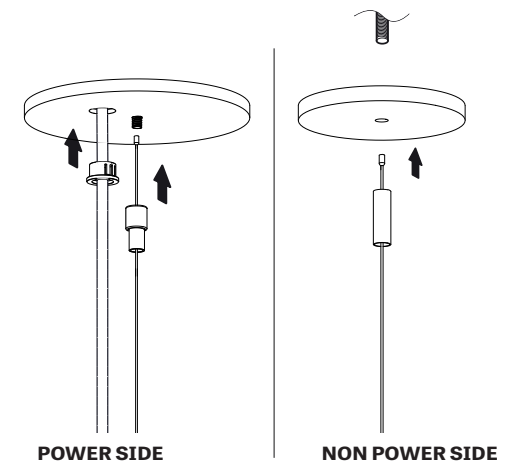

For a continuous system, repeat steps 1 to 3 for all mounting and 4-5 for the first fixture in the run.

