


# POP 44 RECESSED SQUARE

## DRIVER REPLACEMENT


**NOTE:** Wire dimming conductors as Class 1

1

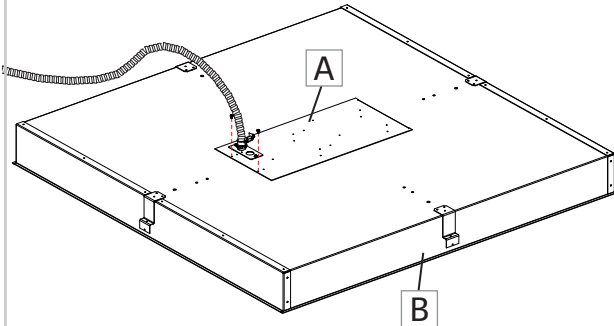


Make sure the power to the fixture is turned off. Unscrew the driver's cover plate (A) **from the top** of the housing (B).

2

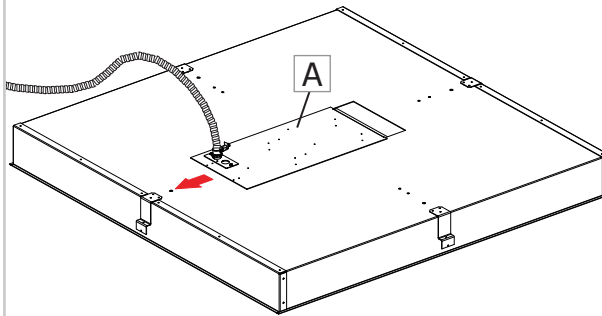


Slide out the driver's cover plate (A).

3

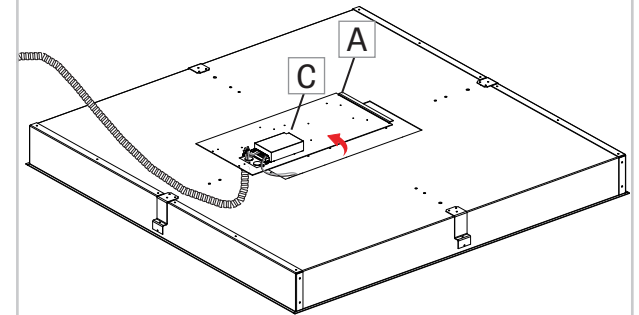


Rotate the driver's cover plate (A) to get access to the driver (C).

4

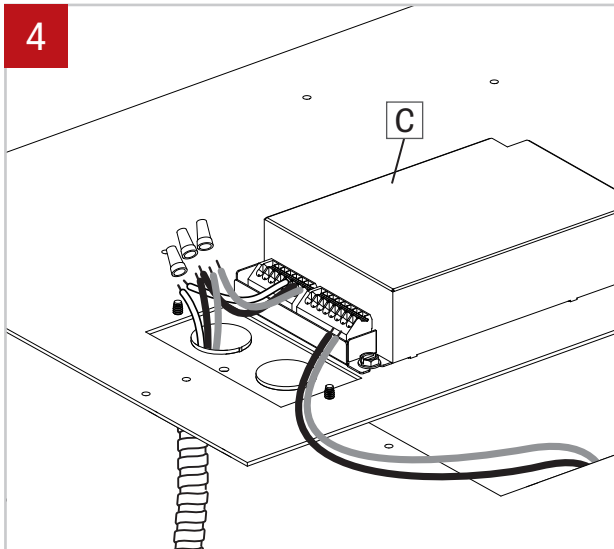


Disconnect wires from the driver (C).

5

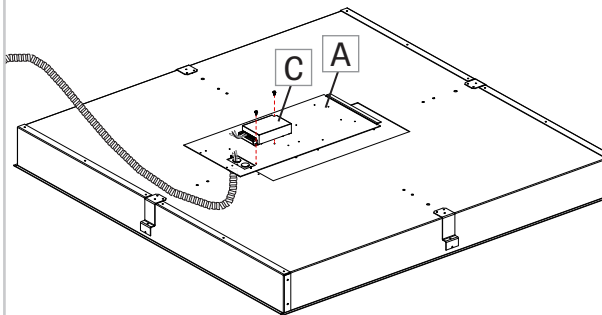

Unscrew the driver (C) from the driver's cover plate (A). Replace the driver, screw it back in place and make electrical connections.

6

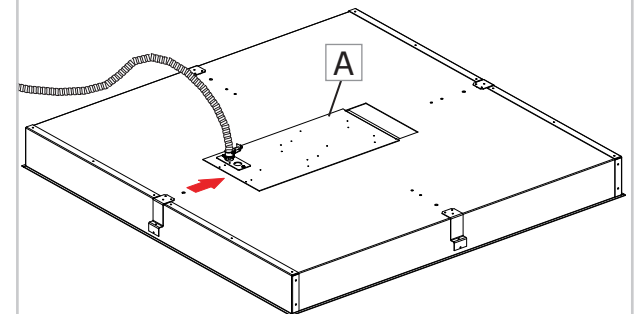


Slide back in the driver's cover plate (A).

# POP RECESSED SQUARE

## DRIVER REPLACEMENT - INSTRUCTION

7

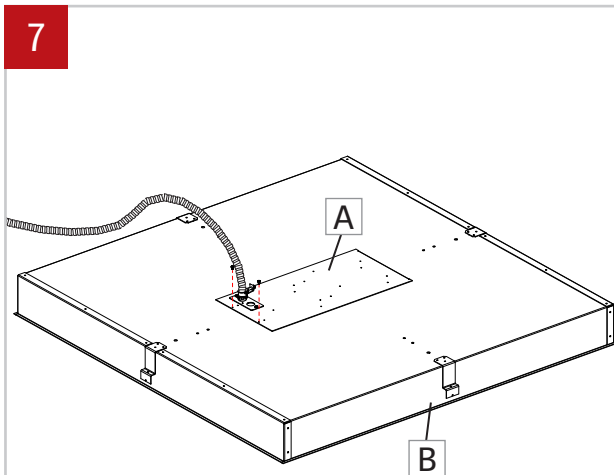

Screw back the driver's cover plate (A) back on the housing (B).