


POP CORE SURFACE MOUNT


DRIVER REPLACEMENT

IMPORTANT: Installation instructions are shown with Pop Round and applies to all Pop Round and Pop Square fixtures


NOTE: Wire dimming conductors as Class 1

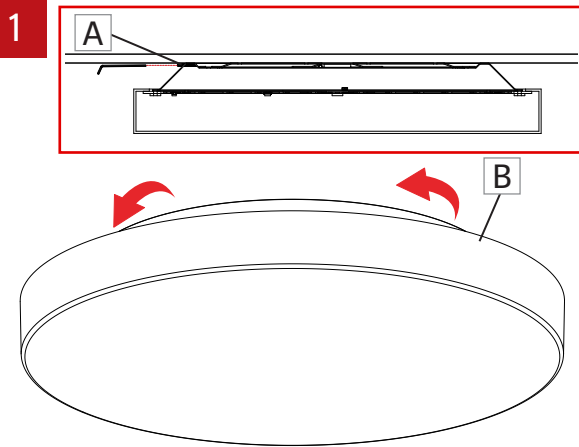


Make sure the power to the fixture is turned off.
If wall mount, remove the set screw (A) on the fixture (B) with an Allen key.
Turn the fixture (B) counterclockwise to unlock it.

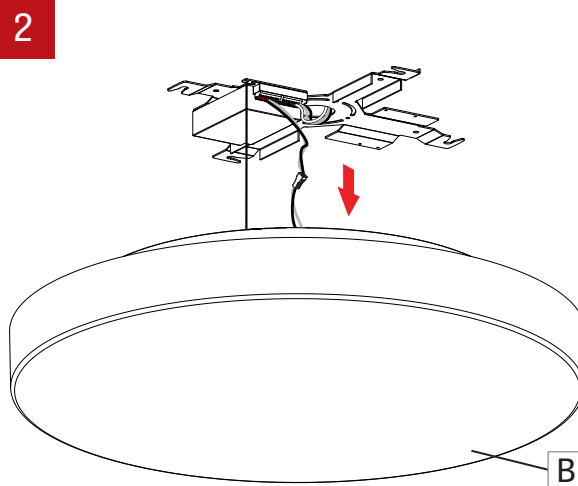


Carrefully lower the fixture (B).

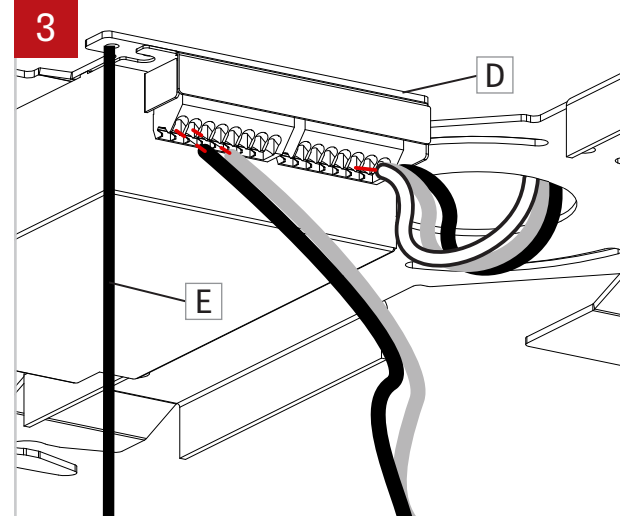


Disconnect the wires connecting the driver (D) to the junction box (E) and the LED board. Remove security cable (E).

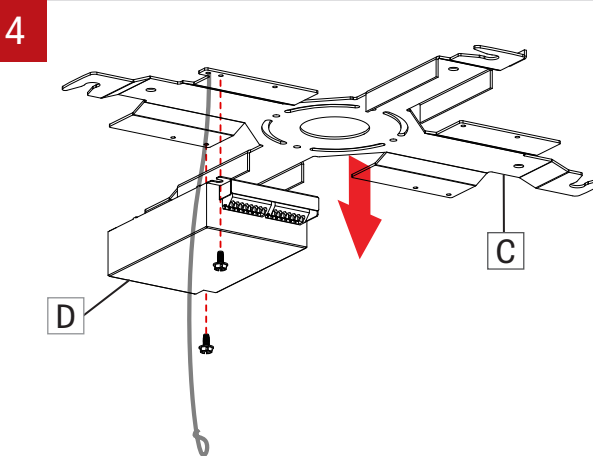

Unscrew the driver (D) from the mounting bracket (C). Replace the driver and reconnect the wires between the driver and the power wires from the junction box.

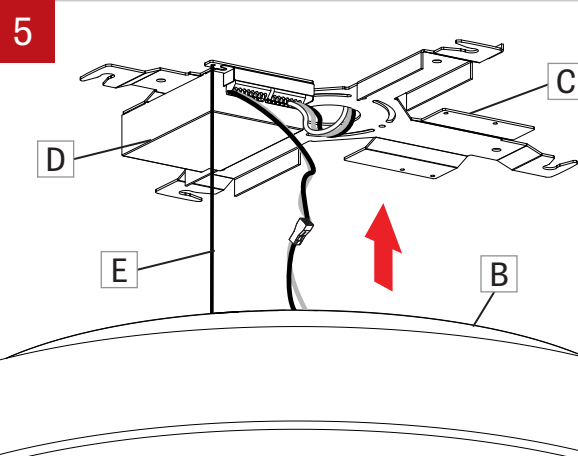

Install security cable (E) back in place. Reconnect the wires between the fixture (B) and the driver (D). Carrefully lift up the fixture to place it on the mouting bracket (C).

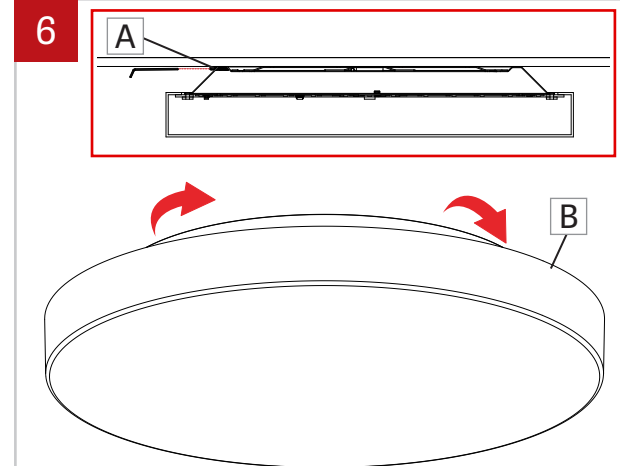

Place the fixture (B) on the mounting bracket and turn it clockwise to fix it.
If wall mount, lock the bracket by tightening the set screw (A) using an Allen key.