




NOTE: Wire dimming conductors as Class 1

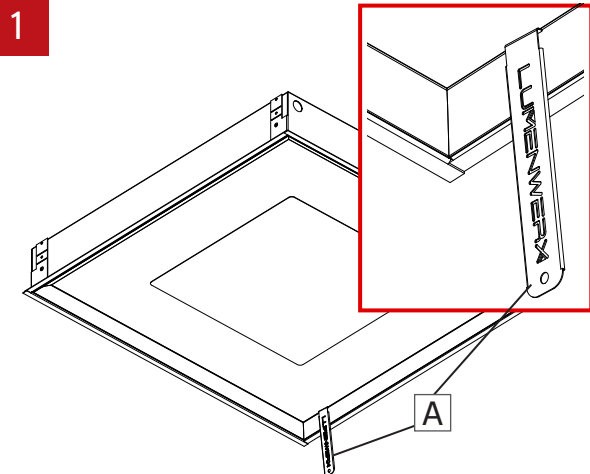


Make sure the power to the fixture is turned off. Place lens tool (A) in between frame and lens, as shown.

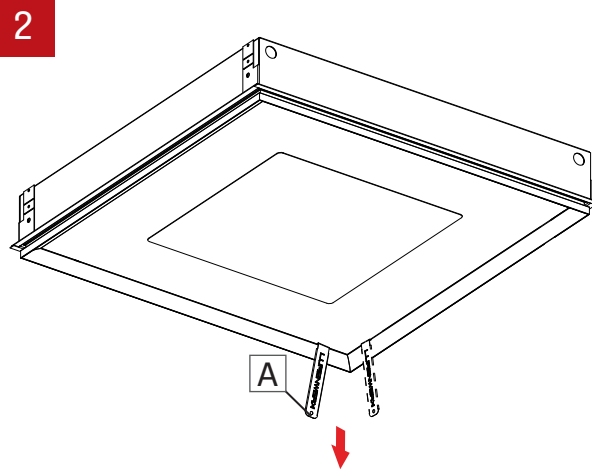


Slowly pull down lens frame on four corners using the lens tool (A).

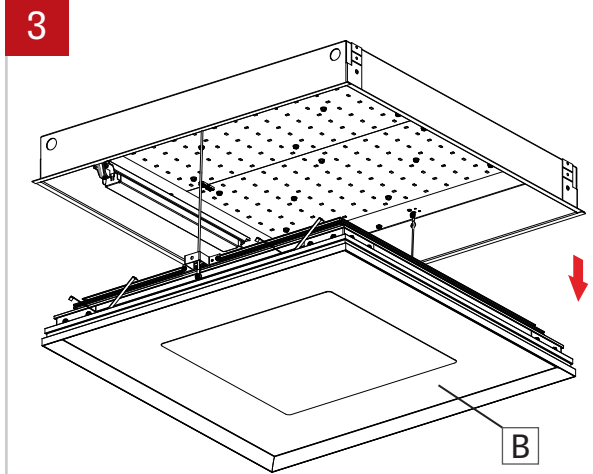


Lower lens assembly (B) retained by security cables.

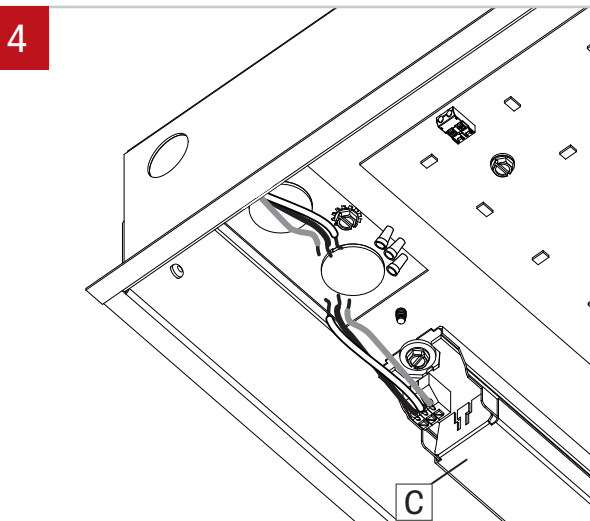

Disconnect wires from the driver (C)

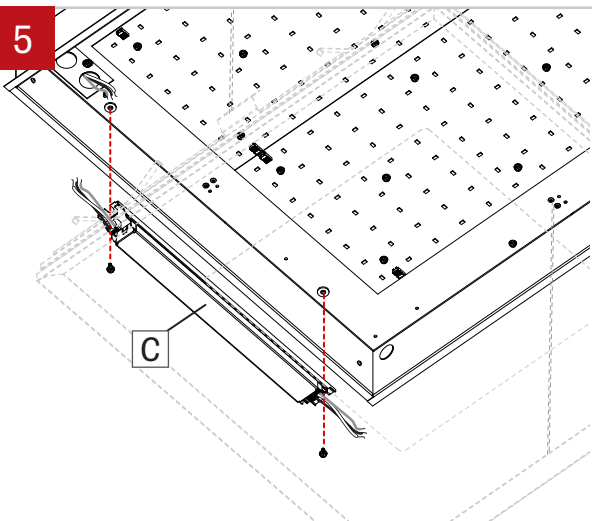

Unscrew the driver (C) from the fixture. Replace the driver and make connection with wire nuts.

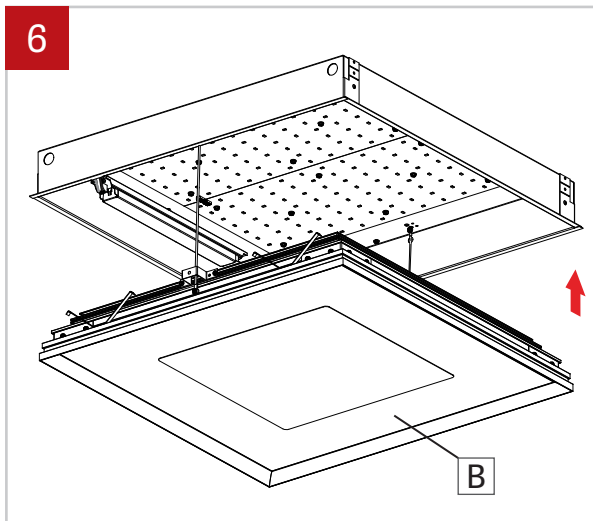

Push the lens assembly (B) into fixture. Power can be safely turned on.