



NOTE: Wire dimming conductors as Class 1

1

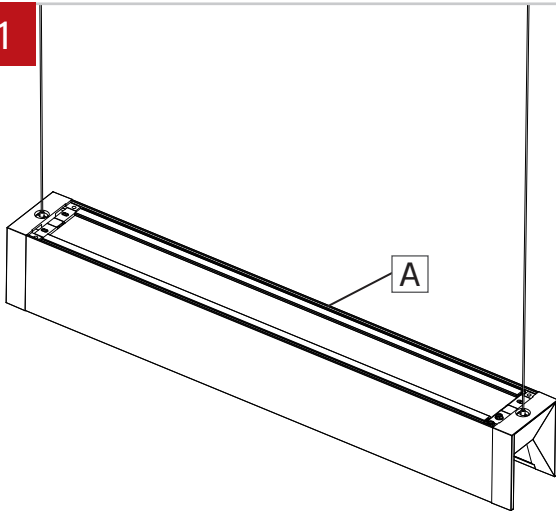


Make sure the power to the fixture (A) is turned off.

2

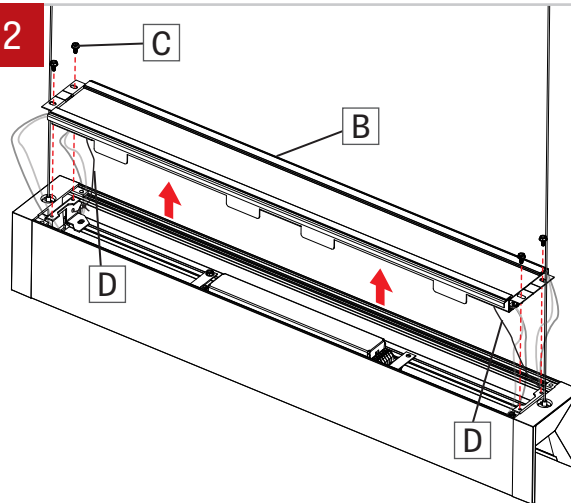


Unscrew and remove the indirect cartridge (B). Keep the screws (C) in a safe place. Keep the cartridge (B) aside, hold by the safety cable (D).

3

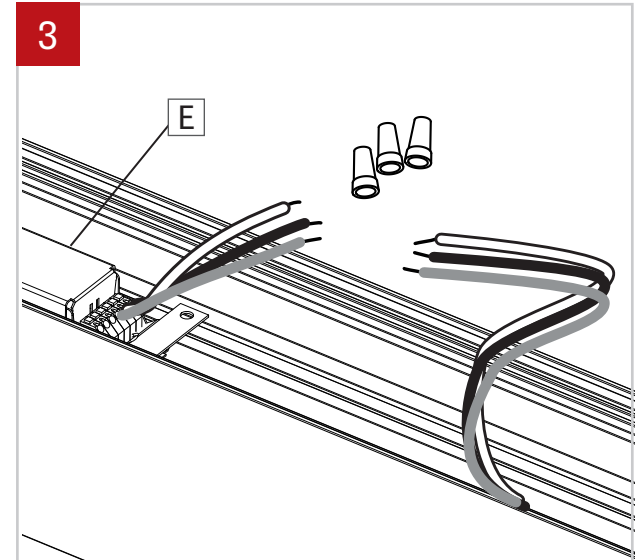


Disconnect wires from the driver (E).

4

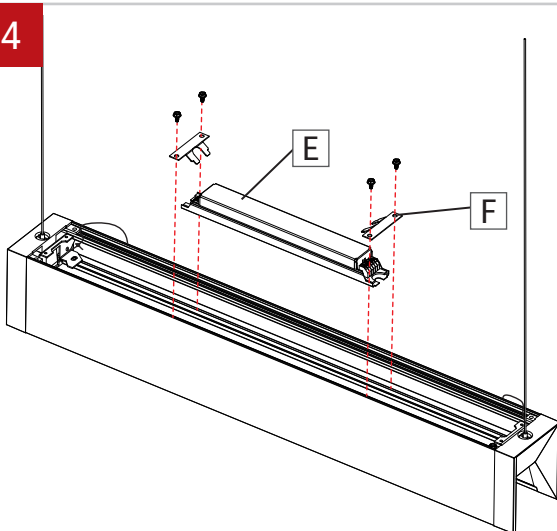

Unscrew the driver brackets (F) from the fixture. Remove and replace the driver (E) and make connection with wire nuts.

5

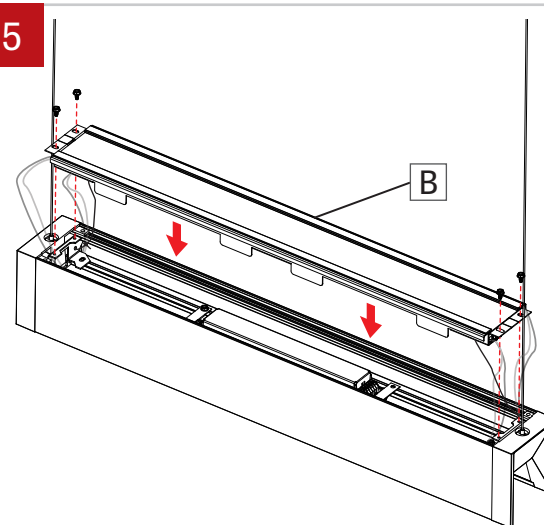

Reinstall the cartridges (B) by using screws (C).