



NOTE: Wire dimming conductors as Class 1

1

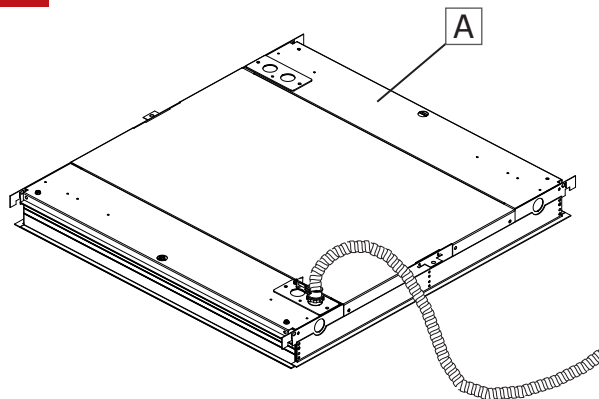


Make sure the power to the fixture (A) is turned off.

2

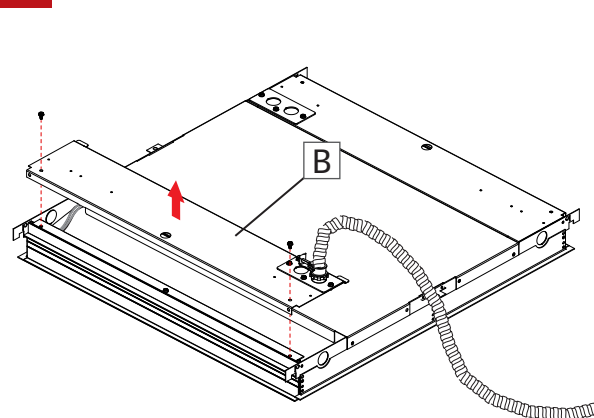


Unscrew and open the side cover (B) on the power side.

3

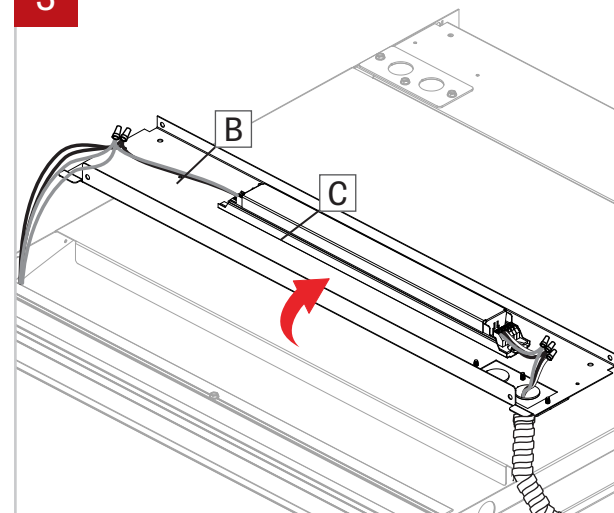


Rotate the side cover (B) to get access to the driver (C).

4

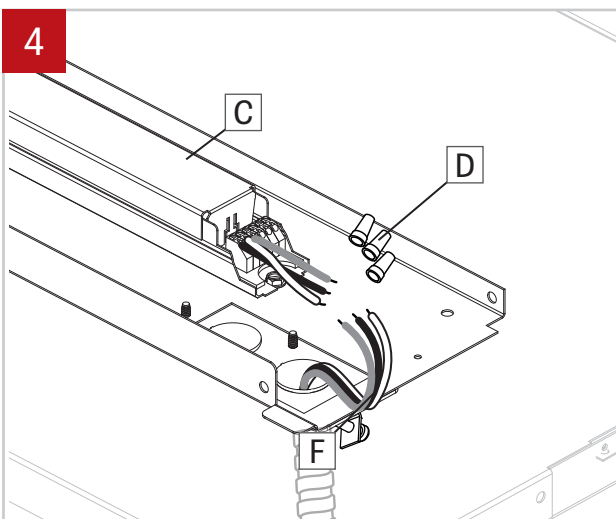


Unscrew the wire nuts (D) on both side of the driver (C).

5

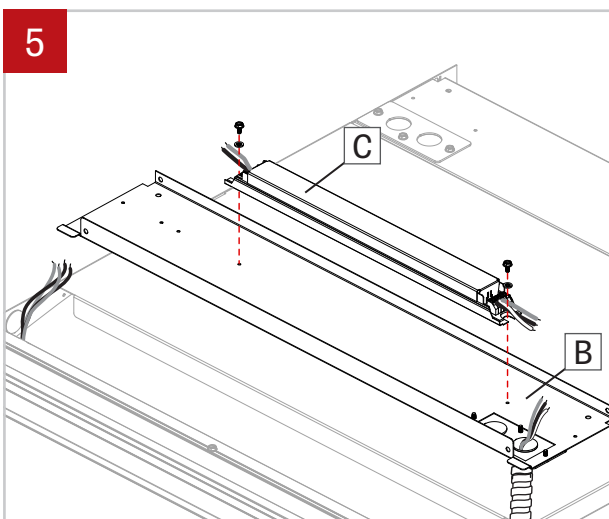

Unscrew the driver (C) from the side cover (B). Replace the driver, screw it back in place and make connections with wire nuts.

6

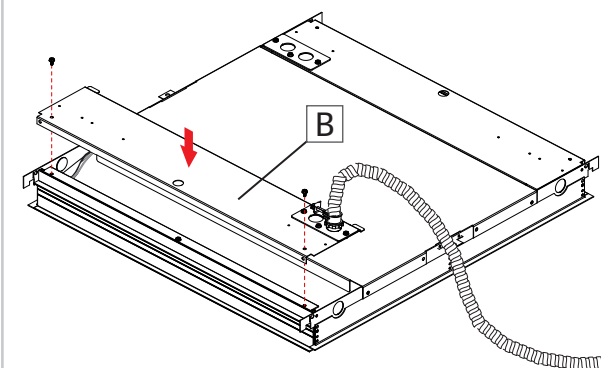

Put the side cover (B) back in place and screw it back to the fixture.