


# POP COLOR SQUARE 4x4

LUMENWERX

PENDANT DIRECT  
STATIC WHITE




Project: \_\_\_\_\_  
Type: \_\_\_\_\_

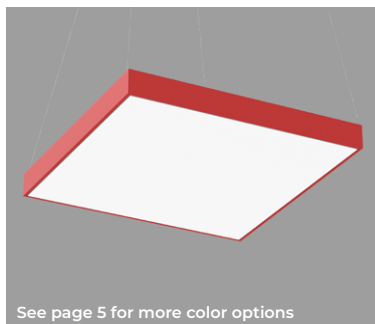

See page 5 for more color options

Flush lens



2" regressed lens

## DESCRIPTION

POP Color features a painted housing with a uniformly luminous diffuser that sits flush or regressed. The diffuser and light engine form a fully enclosed unit secured by a twist-and-lock mechanism for easy maintenance with no exposed hardware. POP Color delivers up to 114 LPW and is available in nine standard housing colors.

## Order Guide

Up to 114 lm/W performance

LUMINAIRE ID	SIZE	OPTIC	LENS POSITION	LIGHT SOURCE <sup>1</sup>	CRI	DIRECT LUMEN PACKAGE
<b>PCSQPD</b>	<b>4FTX4FT</b>	<b>ULO</b>		<b>SW</b>		
<b>PCSQPD</b> - Pop Color Square Pendant Direct	<b>4FTX4FT</b> - 4' X 4'	<b>ULO</b> - Uniform Lambertian Optic	<b>FH</b> - Flush <b>2R</b> - 2" regressed	<b>SW</b> - Static white  <sup>1</sup> Chromawerx Sola and Duo also available. Consult other spec sheet.	<b>80</b> - 80 CRI <b>90</b> - 90 CRI	<b>7000</b> - Min. low output 7000lm <b>10000</b> - Medium output 10000lm <b>14000</b> - Max. high output 14000lm <b>####</b> - Other required lm

COLOR TEMP.	VOLTAGE	DRIVER <sup>3</sup>	ELECTRICAL	MOUNTING
				<b>5SWAC36</b>
<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K	<b>120</b> - 120V <b>277</b> - 277V <b>UNV</b> - 120V-277V <b>347</b> <sup>2</sup> - 347V  <sup>2</sup> Available with D1 only.	<b>D1</b> - 1% 0-10V <b>DA</b> <sup>4</sup> - DALI <b>LDE1</b> <sup>4</sup> - Lutron Hi-lume 1% Eco <b>ELD1</b> - eldoLED 1% ECOdrive 0-10V <b>ELD0</b> - eldoLED 0.1% SOLOdrive 0-10V  <sup>3</sup> PoE (Power-over-Ethernet) compatible. Consult factory for details. <sup>4</sup> On-site commissioning is required.	<b>1</b> - 1 circuit <b>+EB</b> <sup>5</sup> - Emergency battery pack <b>+GTD</b> <sup>5</sup> - Generator transfer device  <sup>5</sup> Not available with 347V.	<b>5SWAC36</b> - Power 5" square white canopy (36" aircraft cable) <a href="#">For all other options refer to our Pendant Mounting Guide</a>

POWER CORD COLOR	FINISH	OPTIONS
<b>BPC</b> - Black power cord <b>WPC</b> - White power cord	<b>W</b> - Matte white <b>AL</b> - Aluminum <b>BK</b> - Black <b>RAL 1028</b> - Yellow <b>RAL 2004</b> - Orange <b>RAL 3020</b> - Red <b>RAL 4010</b> - Magenta <b>RAL 5002</b> - Blue <b>RAL 6018</b> - Green <b>CF#</b> - Custom finish specify RAL#	<b>FU120</b> - Fuse 120V <b>FU277</b> - Fuse 277V <b>NA</b> - None


# POP COLOR SQUARE 4x4

LUMENWERX


PENDANT DIRECT  
STATIC WHITE

## Dimensions

POP COLOR FH - FLUSH

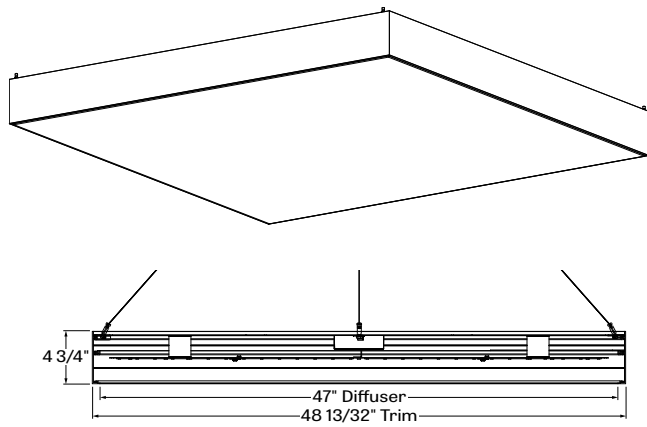

POP COLOR 2R - 2" REGRESSED

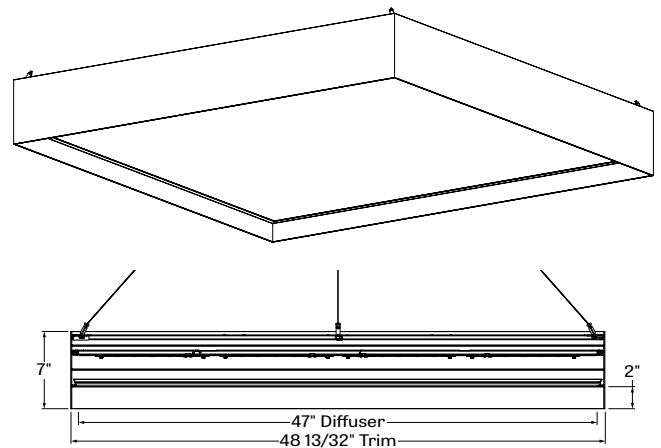


# POP COLOR SQUARE 4x4

LUMENWERX


PENDANT DIRECT  
STATIC WHITE

## Photometrics




7000 LUMEN AT 80 CRI - LOW OUTPUT

LED OUTPUT	COLOR TEMP	WATTS	NOMINAL DELIVERED LUMENS	EFFICACY LPW
Low output	2700K	66.5	7000	105
Low output	3000K	65.5	7000	107
Low output	3500K	63.5	7000	110
Low output	4000K	61.5	7000	114



10000 LUMEN AT 80 CRI - MEDIUM OUTPUT

LED OUTPUT	COLOR TEMP	WATTS	NOMINAL DELIVERED LUMENS	EFFICACY LPW
Medium output	2700K	97	10000	103
Medium output	3000K	95	10000	105
Medium output	3500K	92.5	10000	108
Medium output	4000K	89.5	10000	112



14000 LUMEN AT 80 CRI - HIGH OUTPUT

LED OUTPUT	COLOR TEMP	WATTS	NOMINAL DELIVERED LUMENS	EFFICACY LPW
High output	2700K	140	14000	100
High output	3000K	137.5	14000	102
High output	3500K	132	14000	106
High output	4000K	128.5	14000	109

# POP COLOR SQUARE 4x4

# LUMENWERX

PENDANT DIRECT  
STATIC WHITE

## Technical Specifications


### OPTIC

#### Uniform Efficiency Lambertian Optic (ULO)

Made of formed impact modified white PMMA, the optic provides an even light distribution with up to 88% transmission. Its unique enclosed shell design protects LEDs against Electrostatic Discharge and dust while its back surface project a soft glow on the mounting surface.

### LENS POSITION

Pop Color square 44 pendant is available in 2 lens configurations.

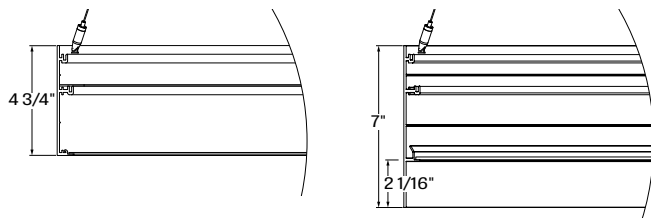

PCSQPD + FH - Flush lens

PCSQPD + 2R - 2" regressed lens

### LIGHT SOURCE

Custom array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

### ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% (specify 2-wire, or Ecosystem Dim-to-Off), eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

### PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white) emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

### EMERGENCY


Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 10W (25°C) emergency lighting output and recharge time of 24 hours.

### MOUNTING OPTION

Fixtures are pendant-mounted, using aircraft cables. Unless otherwise specified, Lumenwerx provides the following hardware:

**For cable-mounted fixtures** - 5SWAC36, 5" square white canopy with a 36" cable.

[For all other options, see our website for a detailed Pendant Mounting Guide](#)

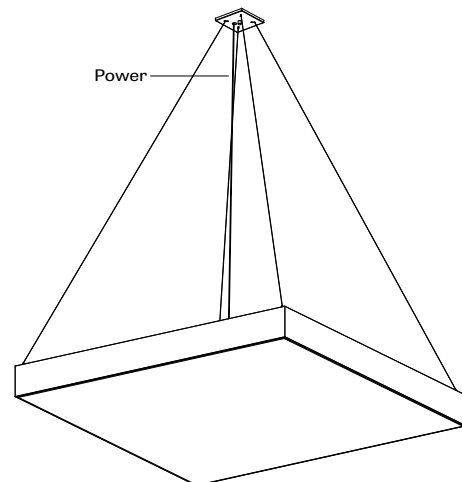

# POP COLOR SQUARE 4x4


# LUMENWERX

PENDANT DIRECT  
STATIC WHITE


## FINISH

**Interior** - 95%, reflective, matte white powder coating


**Exterior** - Side trim is offered in a range of vibrant color powder coating.




W - Matte white




AL - Aluminum




BK - Black




RAL 1028 - Yellow




RAL 2004 - Orange




RAL 3020 - Red



RAL 4010 - Magenta



RAL 5002 - Blue



RAL 6018 - Green

## CONSTRUCTION

**Housing** - Welded aluminum extrusion .125in thick, wide variety of colored powder coating

**Diffuser** - Uniform Lambertian Optic, thermoformed impact modified acrylic, completely enclosed

## WEIGHT

**SQ 44 Flush, 2R** - 77.12lbs - 35.02kg

## CERTIFICATION

**ETL** - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

## WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.