



**NOTE:** Wire dimming conductors as Class 1

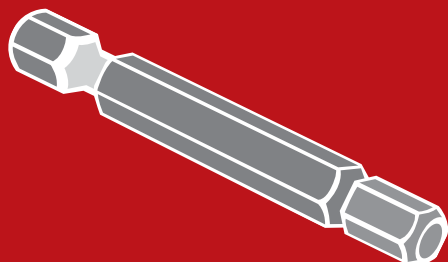


**Tamper-resistan hex bit, 1/4"**  
**is REQUIRED to perform the installation**

### 1 SINGLE FIXTURE

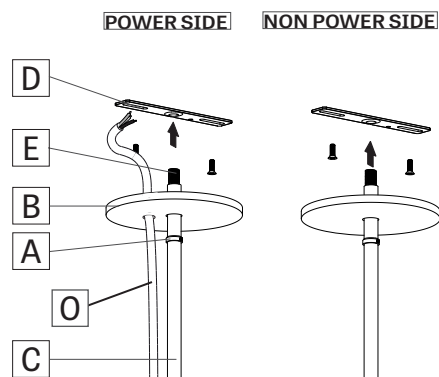


Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) with the threaded rods (E) onto the stem (C). Wet-location power-cord is supplied by us (O).

### 2

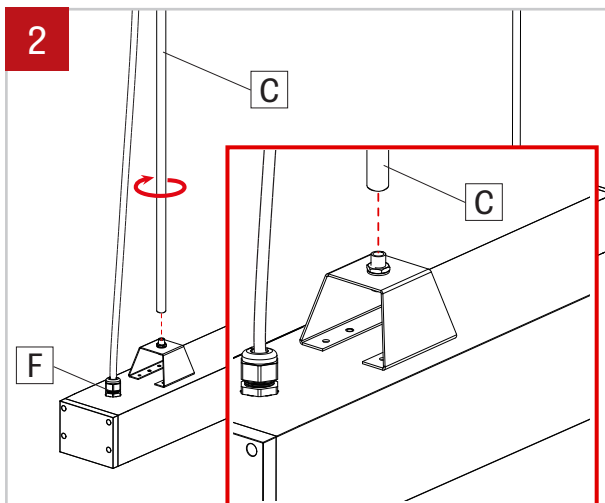


Screw the stems (C) onto the nipple at the ends of the fixture (F).

### 3 POWER SIDE

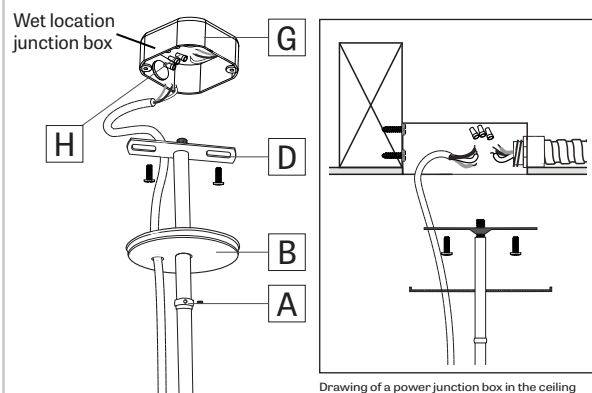


Raise the fixture and tighten the junction box crossbar (D) with screws to the junction box (G). Make wire connection with wire connectors (H). Then slide the canopy (B) and thighten the set up with the slip ring (A).

### 4 NON-POWER SIDE

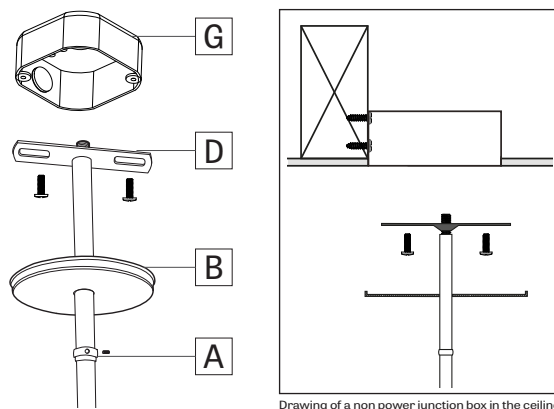


Raise the fixture and tighten the junction box crossbar (D) with screws to the junction box (G). Then slide the canopy (B) and thighten the set up with the slip ring (A).

### 5 CONTINUOUS SYSTEM

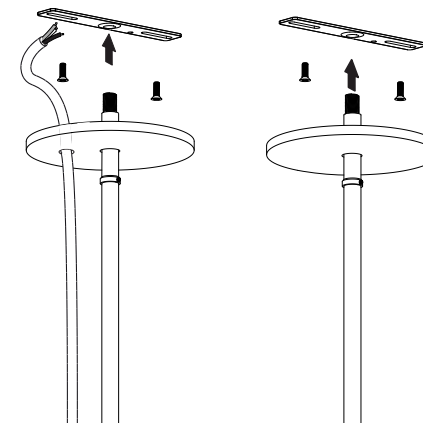


For a continuous system, repeat step 1 for all mounting hardware.

6

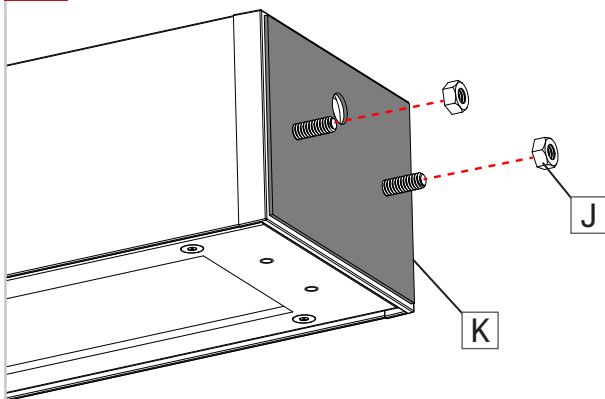


Unscrew and remove nuts (J) on the outside of the joiner (K). Put the nuts (J) in a safe place.

7

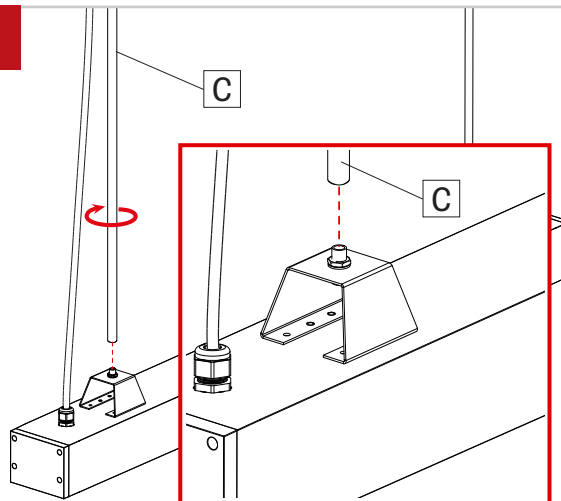


Screw the stems (C) onto the nipple at the ends of the first two fixtures.

8

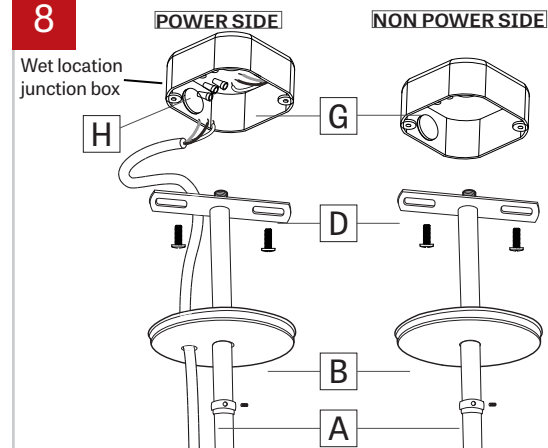


Raise the first fixture and tighten the junction box crossbars (D) with screws to the junction boxes (G). Make wire connection on the power side with wire connectors (H). Then slide the canopies (B) and tighten the sets up with the slip rings (A).

9

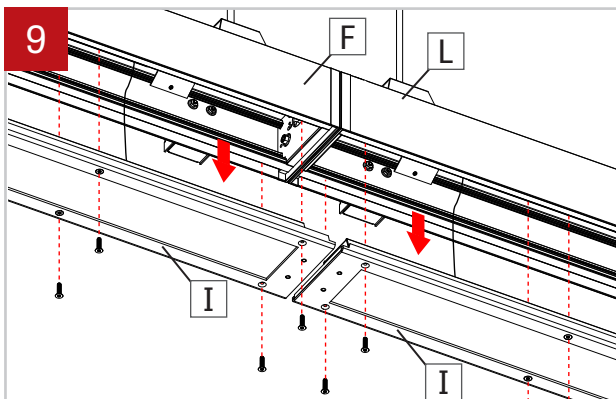


Push the wires of the second fixture (L) inside the first fixture (F) through the holes of the end caps. Align the second fixture (L) to the screws of the joiner of the first fixture (F). Attach the second fixture (L) to the ceiling as shown in step 8. Unscrew and lower the lens frames (I) of the two fixtures retained by security cables.

10

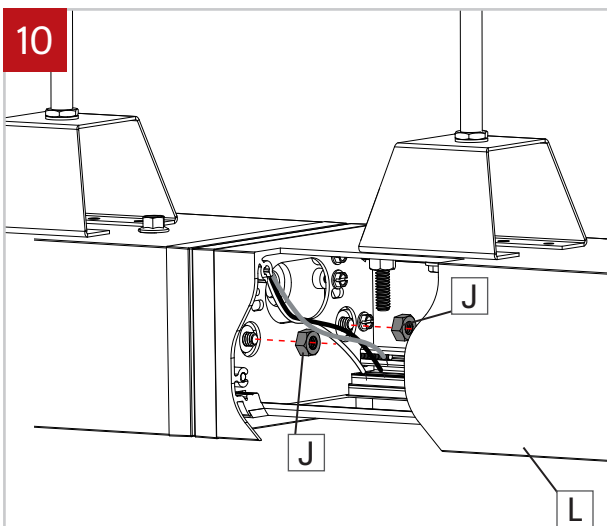

Reinstall the nuts (J) inside the second fixture (L) on the joiner to secure it.

11

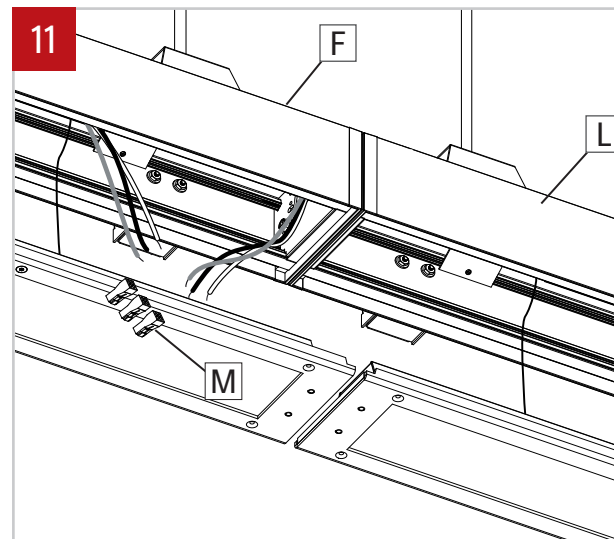

Make the wires connection between (F) and (L) using quick connectors (M). **Numbers of wires may vary.**

