



NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

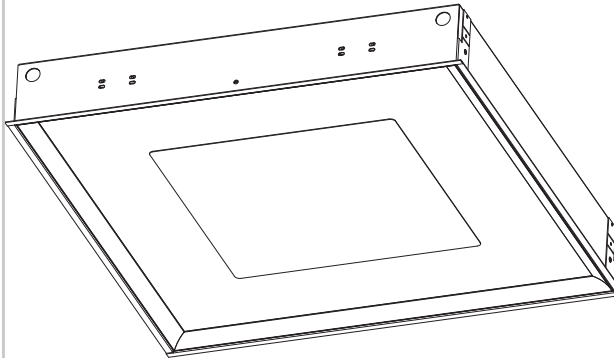


Make sure the power to the fixture is turned off.

2

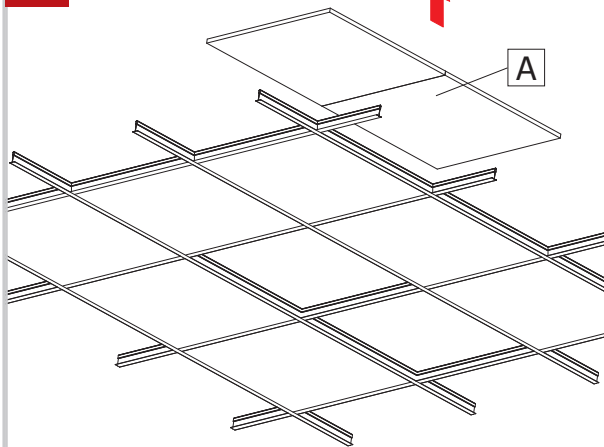


Remove ceiling tiles (A) where the fixture will be installed and adjacent tiles for easy access during installation.

3

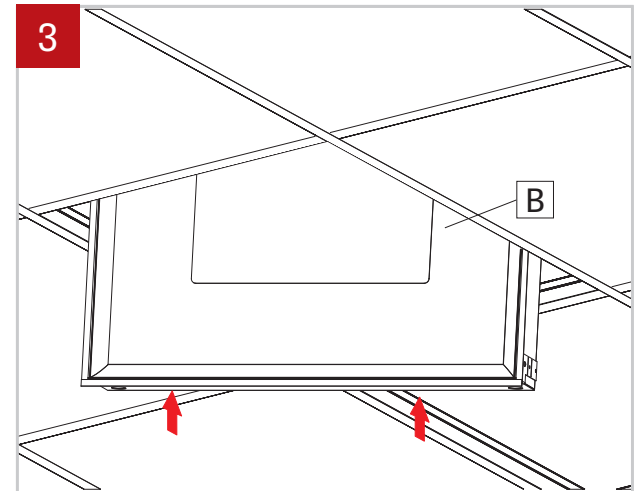


Insert the fixture (B) above the ceiling grid as shown

4

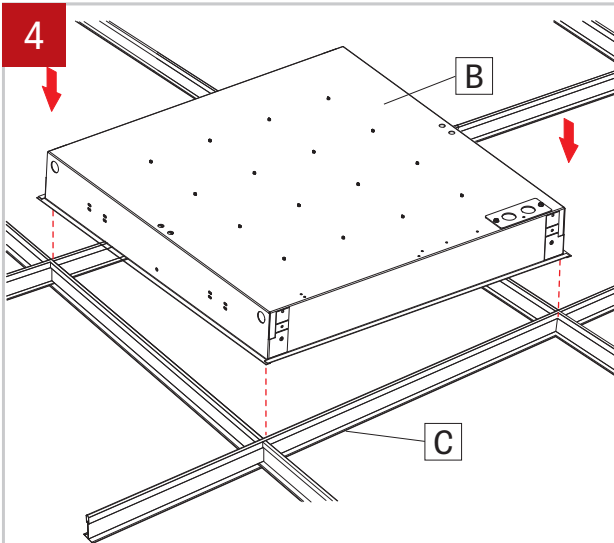


Insert fixture (B) into the t-bar grid (C).

5

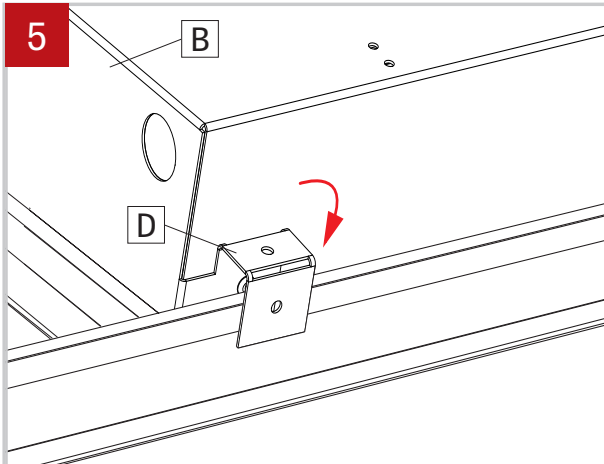

Bend the tab (D) on each corner of the fixture (B) to provide support.

6

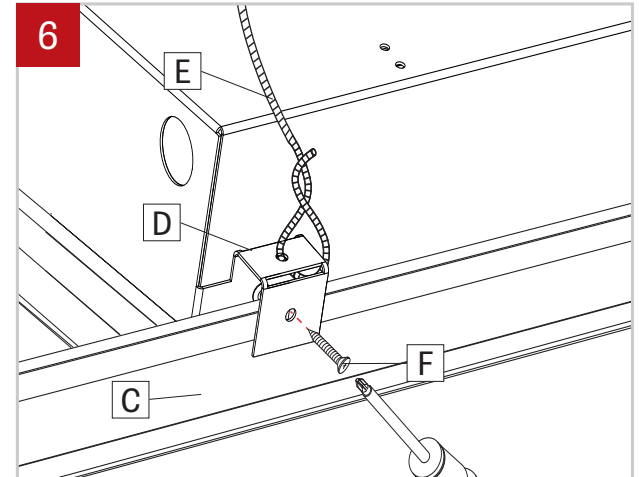

for additional safety a security wire (E) can be attached from the tabs (D) and a screw (F) can be used to fix the fixture to the T-bar grid (C).

