

PENDANT MOUNTING GUIDE

Multiple Mounting Points

Please specify required canopy type, canopy color, stem or cable length, stem color, when done enter complete under MOUNTING in the product code.

For custom mounting options please add one of the following options to the end of the mounting code

AIR CRAFT AND STEM MOUNTING






CANOPY TYPE	CANOPY COLOR	HARDWARE	CABLE OR STEM LENGTH	CUSTOM OPTIONS
53 Power side 5" canopy Non power side 3" canopy (available for cable mount only)	W White A Aluminum	AC Air Craft Cable SW Stem white	18 18 inches 24 24 inches	+SEM Seismic Mounting +SLC Sloped ceiling for cable
55 Power side 5" canopy Non power side 5" canopy	B Black #### For all other specify RAL#	SA Stem aluminum SB Stem black S##### For all other stem color specify RAL#	36 36 inches ### For all other specify length	+SLS Sloped ceiling for stem

Options may vary according to fixture. See product's spec sheet

See [Sloped](#) and [Seismic](#) guides for detailed information

For required caddy clips please specify under **OPTIONS** the ceiling type and the ceiling size.

CADDY CLIP OPTIONS

CEILING TYPE				
				
TG 15/16 Tegular ceiling	TG 9/16 Tegular ceiling	TB 15/16 T-bar ceiling	TB 9/16 T-bar ceiling	ST Screw slot ceiling

PLEASE NOTE: GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE ANCHORING RODS TO SUPPORT LOAD OF FIXTURES DETAILED ON SHOP DRAWING. PLEASE CALL CUSTOMER SERVICE FOR ANY QUESTIONS

WARNING RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

PENDANT MOUNTING GUIDE

Single Mounting Point




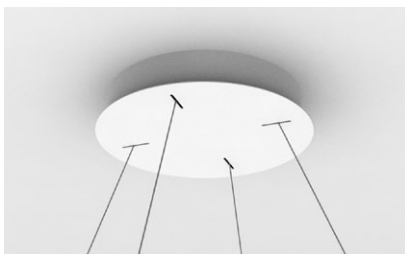
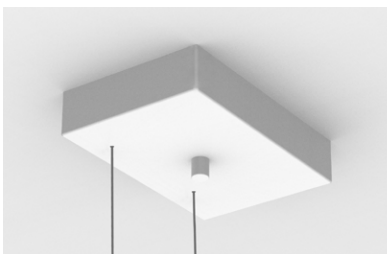
Please specify required canopy type, canopy color, stem or cable length, stem color, when done enter complete under MOUNTING in the product code.

For custom mounting options please add one of the following options to the end of the mounting code

AIR CRAFT AND STEM MOUNTING

CANOPY TYPE (see images below)	CANOPY COLOR	HARDWARE	CABLE OR STEM LENGTH
5 5" round canopy	W White	AC Air Craft Cable	18 18 inches
5S 5" square canopy	A Aluminum	SW Stem white	24 24 inches
SCD Square canopy driver box	B Black	SA Stem aluminum	36 36 inches
RCD Round canopy driver box	#### For all other specify RAL#	SB Stem black	### For all other specify length
LCD Linear canopy driver box		S##### For all other stem color specify RAL#	

Options may vary according to fixture. See product's spec sheet

CANOPY TYPE				
				
5 5" round canopy (shown with an air carft cable)	5S 5" square canopy (shown with a stem)	SCD Square canopy driver box (shown with power over cable)	RCD Round canopy driver box (shown with power over cable)	LCD Linear canopy driver box (shown with power over cable)


PLEASE NOTE: GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE ANCHORING RODS TO SUPPORT LOAD OF FIXTURES DETAILED ON SHOP DRAWING. PLEASE CALL CUSTOMER SERVICE FOR ANY QUESTIONS

WARNING RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

PENDANT MOUNTING GUIDE


TILE CEILING - ON GRID

TILE CEILING - ON GRID

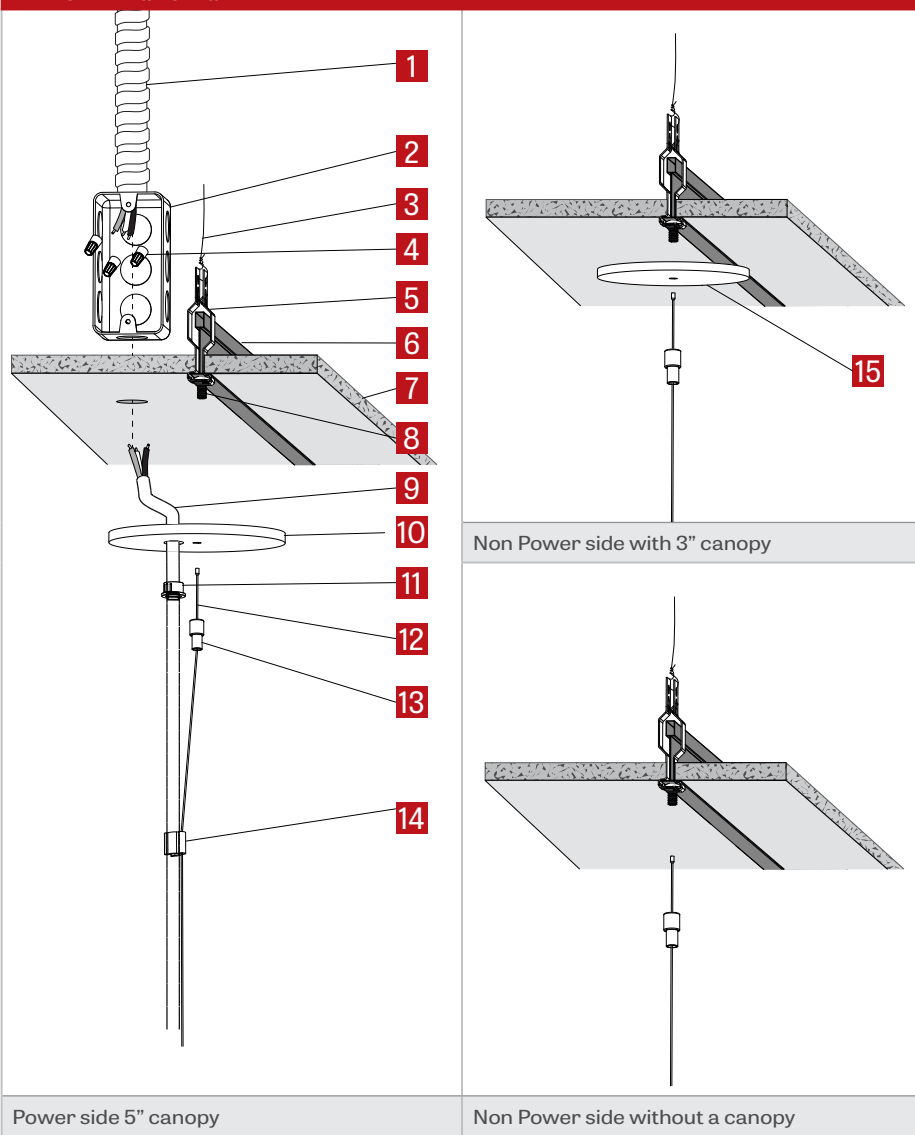

PART LIST

- 1 Armored cable & connector (by others)
- 2 Junction Box (by others)
- 3 Support wire (by others)
- 4 Wire nut
- 5 Caddy clip (by others)
- 6 T-Bar grid (by others)
- 7 Ceiling tile (by others)
- 8 Caddy clip screw (by others)
- 9 Power Cord
- 10 Canopy 5" power side
- 11 Plastic nut
- 12 Aircraft cable
- 13 Grip lock
- 14 Wire cable clip
- 15 Canopy 3" non power side (optional)

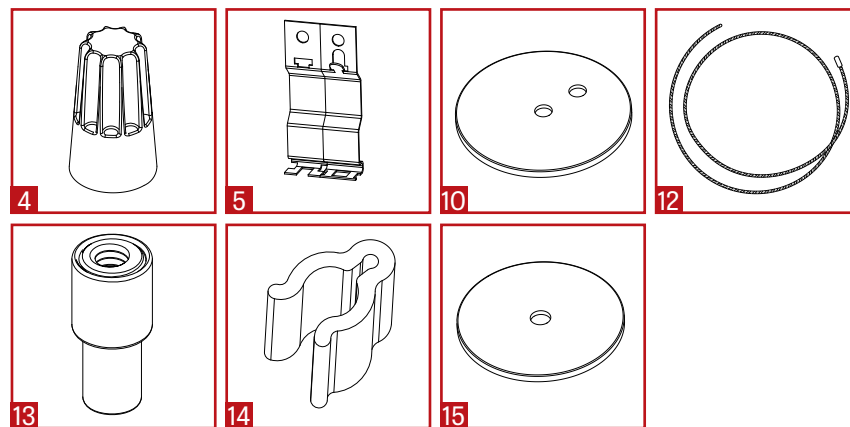


PLEASE NOTE: GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE ANCHORING RODS TO SUPPORT LOAD OF FIXTURES DETAILED ON SHOP DRAWING. PLEASE CALL CUSTOMER SERVICE FOR ANY QUESTIONS

WARNING RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

PENDANT MOUNTING GUIDE








TILE CEILING - MOUNTING PLACED OFF GRID

TILE CEILING - MOUNTING PLACED OFF GRID

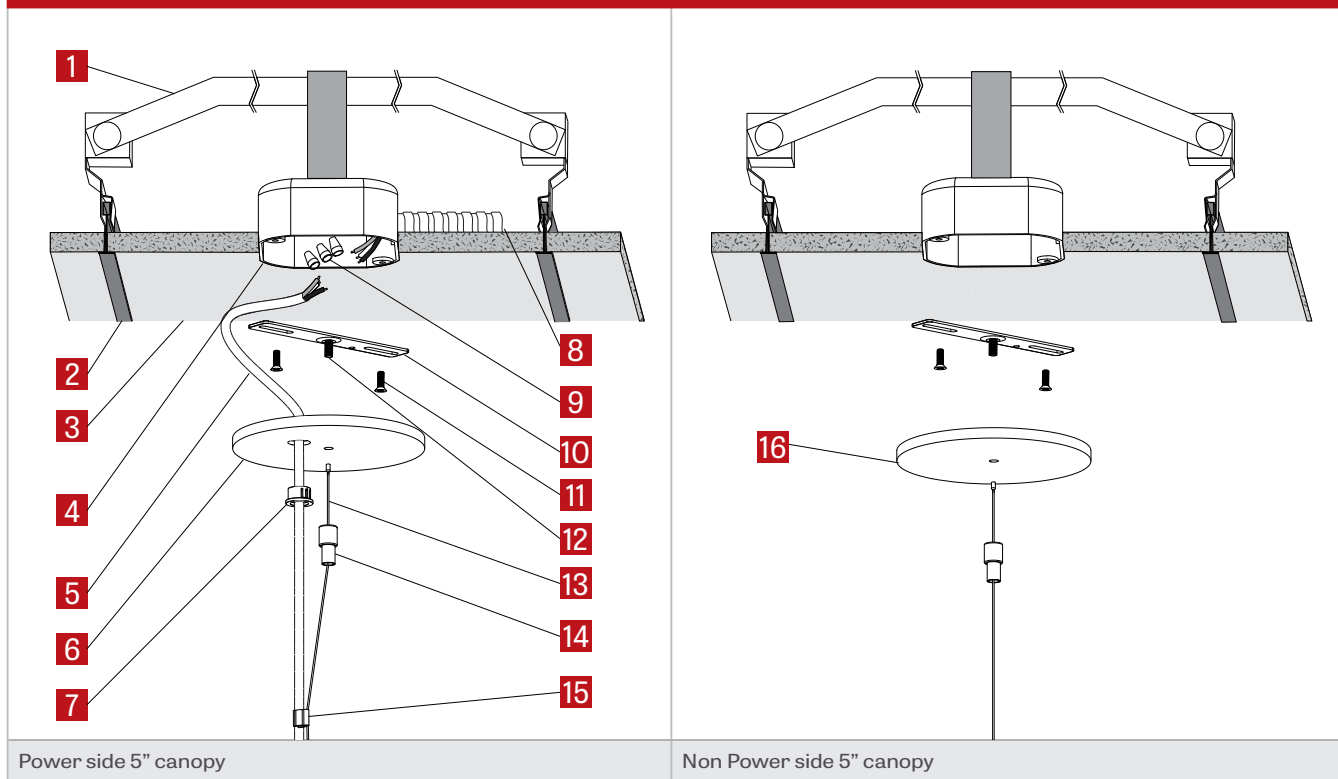

PART LIST

- 1 Junction box support (by others)
- 2 T-bar grid (by others)
- 3 Ceiling Tile (by others)
- 4 Junction Box (by others)
- 5 Power Cord
- 6 Canopy 5" power side
- 7 Plastic nut
- 8 Armored cable & connector (by others)
- 9 Wire nut
- 10 Junction Box screw (by others)
- 11 Junction box crossbar
- 12 1/4"-20 Crimp stud
- 13 Aircraft cable
- 14 Grip lock
- 15 Wire cable clip
- 16 Canopy 5" non power side





PLEASE NOTE: GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE ANCHORING RODS TO SUPPORT LOAD OF FIXTURES DETAILED ON SHOP DRAWING. PLEASE CALL CUSTOMER SERVICE FOR ANY QUESTIONS

WARNING RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

PENDANT MOUNTING GUIDE









DRYWALL CEILING

DRYWALL CEILING

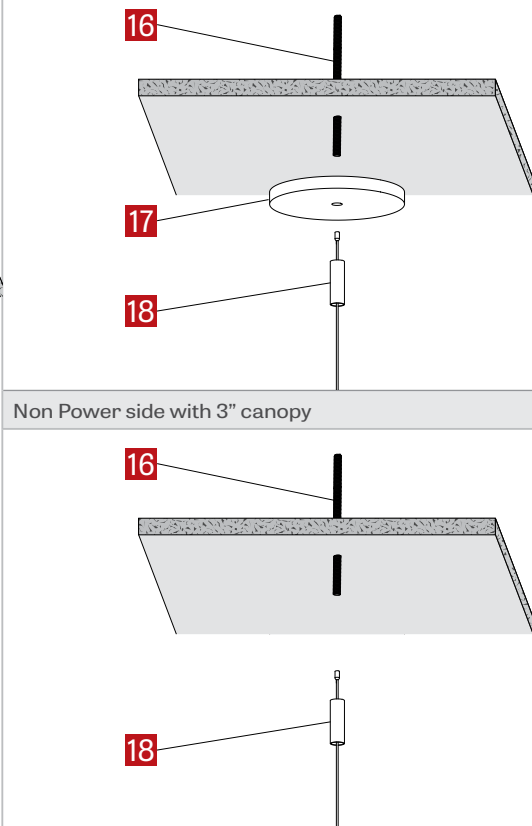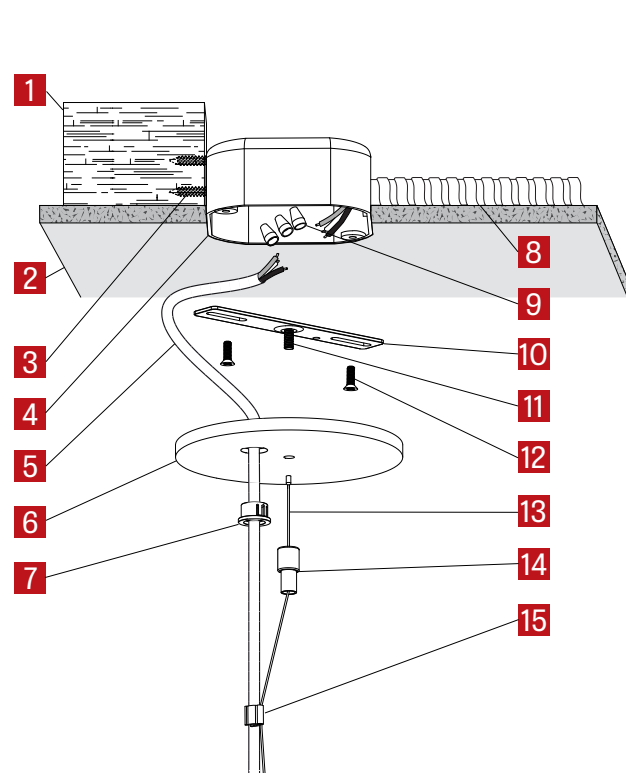

PART LIST

- 1 Ceiling structure (by others)
- 2 Drywall (by others)
- 3 Screw (by others)
- 4 Junction Box (by others)
- 5 Power Cord
- 6 Canopy 5" power side
- 7 Plastic nut
- 8 Armored cable & connector (by others)
- 9 Wire nut
- 10 Junction box crossbar
- 11 1/4"-20 Crimp stud
- 12 Junction Box screw (by others)
- 13 Aircraft cable
- 14 Grip lock
- 15 Wire cable clip
- 16 1/4"-20 Treated rod (by others)
- 17 Canopy 3" non power side (optional)
- 18 1/4"-20 Cable holder




PLEASE NOTE: GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE ANCHORING RODS TO SUPPORT LOAD OF FIXTURES DETAILED ON SHOP DRAWING. PLEASE CALL CUSTOMER SERVICE FOR ANY QUESTIONS

WARNING RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


PENDANT MOUNTING GUIDE

SOLID CEILING

SOLID CEILING

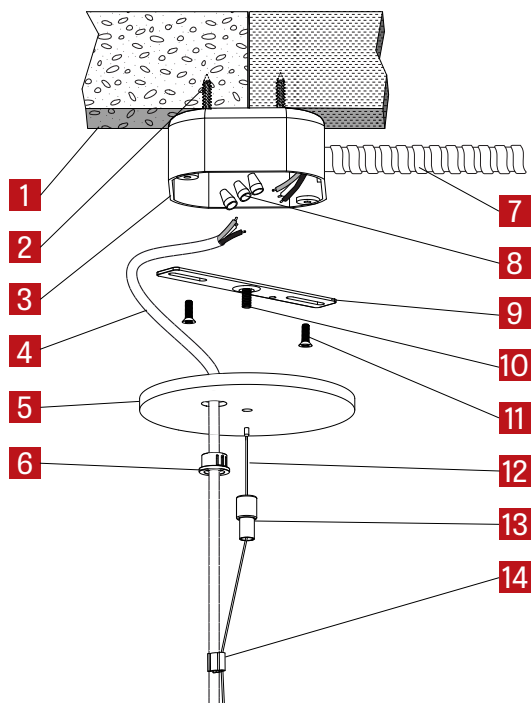


Power side 5" canopy

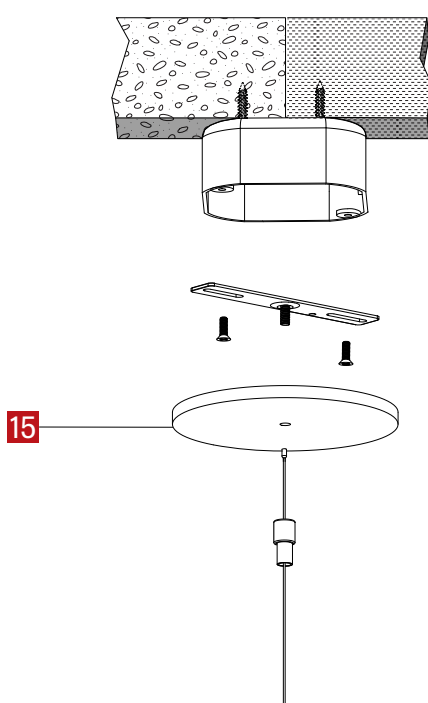


Non Power side 5" canopy

PART LIST


- 1 Ceiling surface material (by others)
- 2 Screw (by others)
- 3 Junction Box (by others)
- 4 Power Cord
- 5 Canopy 5" power side
- 6 Plastic nut
- 7 Armored cable & connector (by others)
- 8 Wire nut
- 9 Junction box crossbar
- 10 1/4"-20 Crimp stud
- 11 Junction box screw (by others)
- 12 Aircraft cable
- 13 Grip lock
- 14 Wire cable clip
- 15 Canopy 5" non power side




5




6




8




9



12



13



14


PLEASE NOTE: GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE ANCHORING RODS TO SUPPORT LOAD OF FIXTURES DETAILED ON SHOP DRAWING. PLEASE CALL CUSTOMER SERVICE FOR ANY QUESTIONS

WARNING RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

PENDANT MOUNTING GUIDE






STEM MOUNT IN DRYWALL CEILING

STEM MOUNT IN DRYWALL CEILING

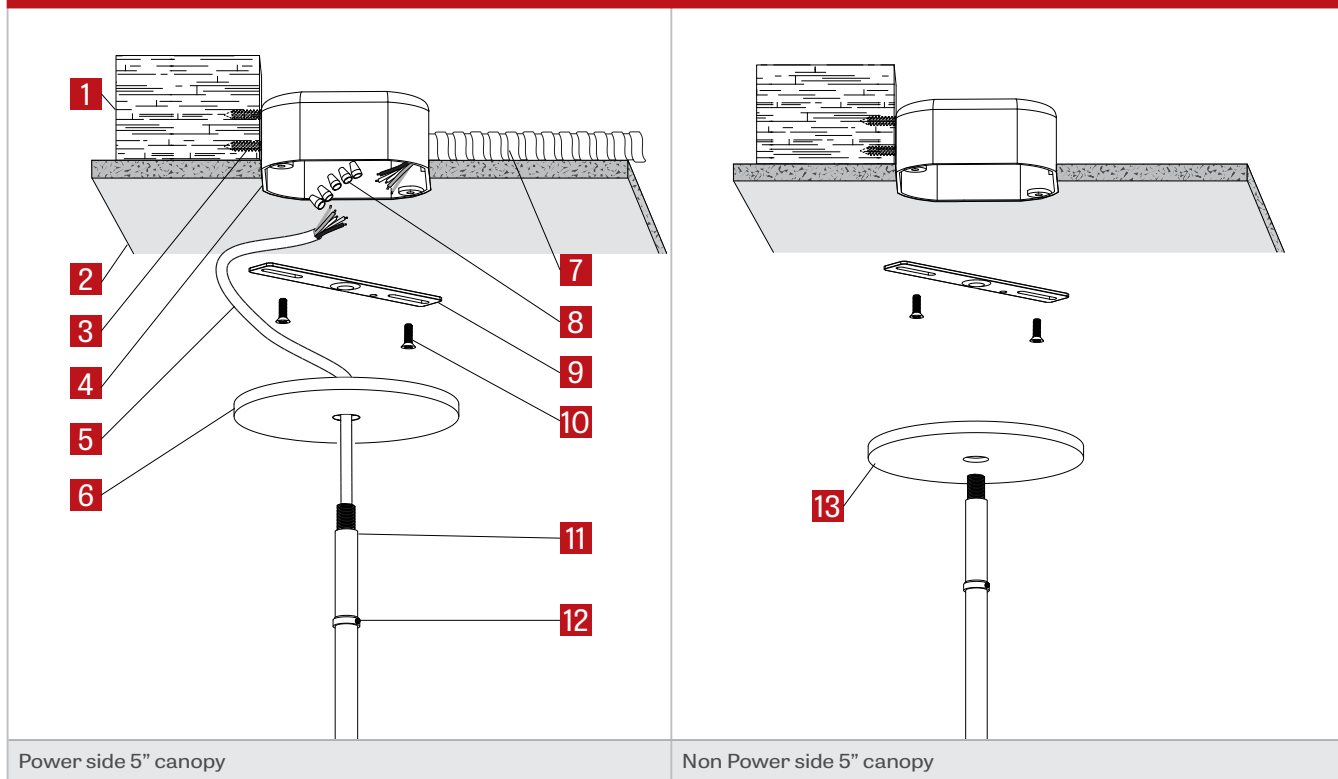

PART LIST

- 1 Ceiling structure (by others)
- 2 Drywall (by others)
- 3 Screw (by others)
- 4 Junction Box (by others)
- 5 Power Cord
- 6 Canopy 5" power side
- 7 Armored cable & connector (by others)
- 8 Wire nut
- 9 Junction box crossbar
- 10 Junction box screw (by others)
- 11 Stem
- 12 Stem slip ring
- 13 Canopy 5" non power side



PLEASE NOTE: GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE ANCHORING RODS TO SUPPORT LOAD OF FIXTURES DETAILED ON SHOP DRAWING. PLEASE CALL CUSTOMER SERVICE FOR ANY QUESTIONS

WARNING RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.