


QUAD N-W FLUORESCENT

BALLAST REPLACEMENT INSTRUCTION

IMPORTANT: Installation instructions are shown with Quad Narrow and applies to all Quad sizes


NOTE: Wire dimming conductors as Class 1

1

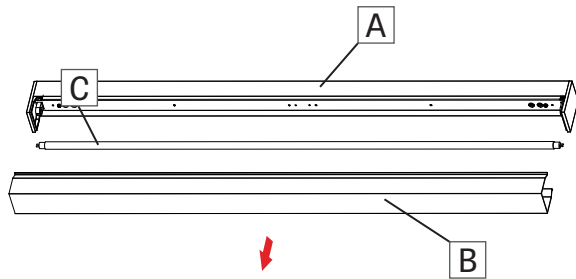


Make sure the power to the fixture (A) is turned off. Remove the lens (B) and the lamp (C) and place them in a safe place.

2

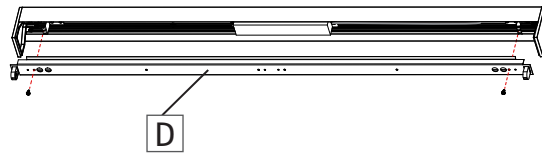


Unscrew the reflector (D) to let appear the ballast.

3

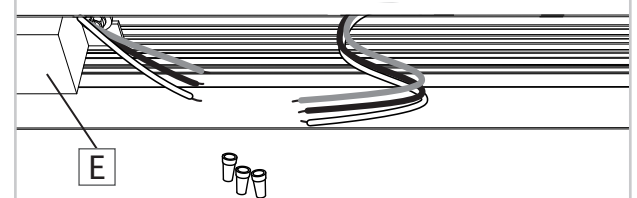


Disconnect wires from the ballast (E).

4

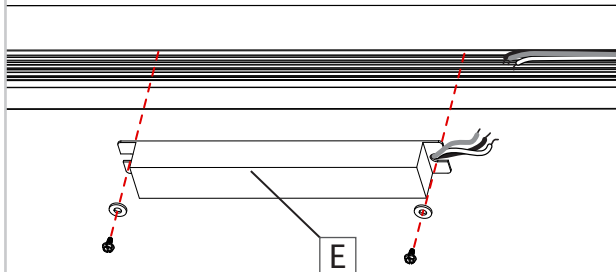

Unscrew the ballast (E) from the fixture. Replace the ballast and make connection with wire nuts.

5

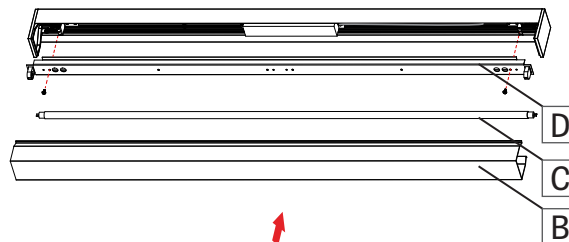

Tighten the reflector (D) back then put back in place the lamp (C) and the lens (B).