


QUAD N-W FLUORESCENT

SURFACE MOUNT - INSTALLATION

IMPORTANT: Installation instructions are shown with Quad Narrow and applies to all Quad sizes


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

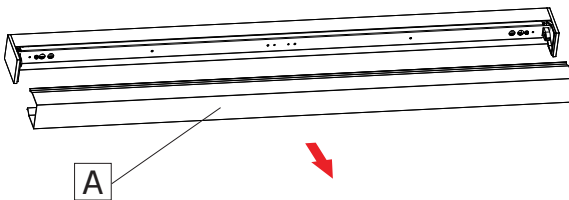


Remove lens (A) from the lamp.

2

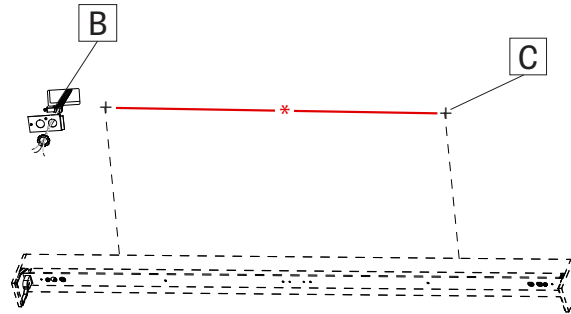


Locate junction box (B) and mounting points (C) in the ceiling. Refer to dimensions [*] supplied in client drawings.

3

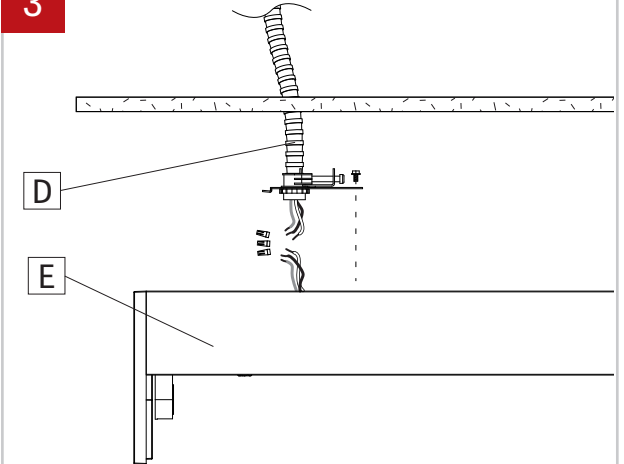


Make electrical connections between main power (D) and fixture (E).

4

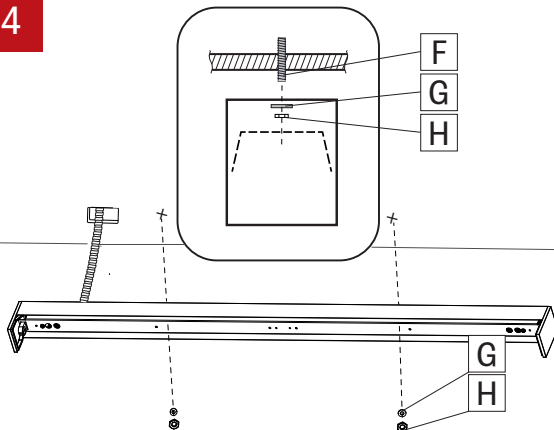

Fasten fixture to threaded stud (F) using washer (G) and nuts (H).


5

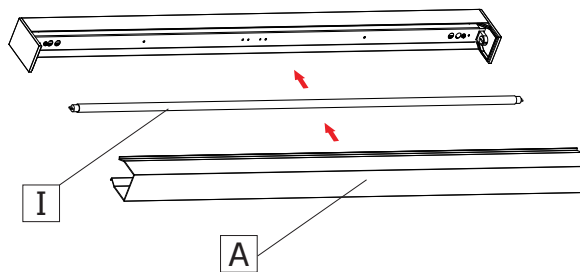

Install the lamp (I) and reinstall the lens (A) back in place.

6

CONTINUOUS SYSTEM

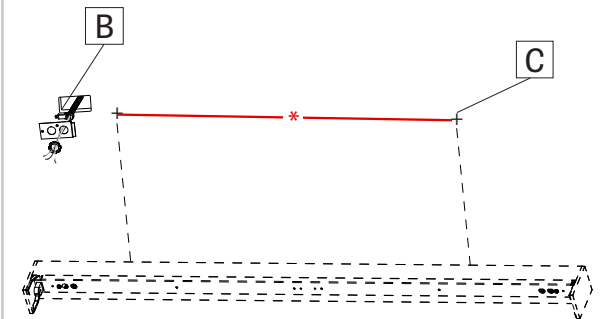

For a continuous system, locate junction box (B) and mounting points (C) in the ceiling. Refer to dimensions [*] supplied in client drawings.

QUAD N-W FLUORESCENT

SURFACE MOUNT - INSTALLATION

