


# REVEN

## WALL DIRECT/INDIRECT

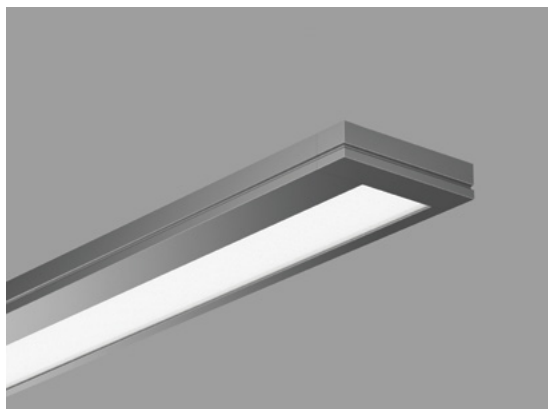

Shown with PMO optics

### DESCRIPTION

**Reven** is a linear pendant and wall luminaire with a thin, articulated profile. Reven provides wide spread uplight and well controlled downlight. This highly efficient and comfortable illumination is offered in a wide range of light distributions together with comprehensive electrical and controls options. Please see additional specification sheets for LED and for Reven ICL with independently controllable light distribution, as well as other mounting arrangements.

**PROJECT:** \_\_\_\_\_

**TYPE:** \_\_\_\_\_

**NOTES:** \_\_\_\_\_

### ORDER GUIDE


REVW	PMO				
LUMINAIRE ID	OPTICS	LIGHT SOURCE	NUMBER OF LAMPS	LIGHT DISTRIBUTION	LUMINAIRE LENGTH
REVW - reven wall	PMO - precision micro-prism Optic	T5 - T5 lamp T5HO - T5HO lamp	1 - 1 lamp 2 - 2 lamps 3 - 3 lamps	30-70 - 30% down - 70% up	#FT - nominal length in feet Sections - 4', 8' and 12' only Continuous Run - for luminaires over 8' in multiples of 4'

VOLTAGE	BALLAST	ELECTRICAL	DRM	FINISH
120 - 120V 277 - 277V UNV - 120V-277V 347 - 347V (not available with Lutron)	RS - rapid start D - dimming 0-10V ST - step dimming DA - dali LHL - Lutron Hi-Lume 3D LEH - Lutron EcoSystem H LE - Lutron EcoSystem	1 - 1 circuit 2 - 2 circuits + #EB - emergency battery (min 4' fixture, except Lutron) + #EM - emergency light circuit + #NL - night light circuit + GTD### - generator transfer device, 120V or 277V	DRM - drywall mounting	W - matte white AL - aluminum CF# - custom finish specify RAL#

See page 2 for ordering code detailed information

CONTROLS	OPTIONS
<u>INDIVIDUAL CONTROLS</u> <b>OMS</b> - Onboard Occupancy <b>ODS</b> - Onboard Daylight <b>OCS</b> - Onboard Occupancy & Daylight <u>GROUPED CONTROLS</u> <b>LSC</b> - Local system <b>NSC</b> - Network system	<b>FU</b> - fuse <b>CU</b> - custom

### CROSS SECTION

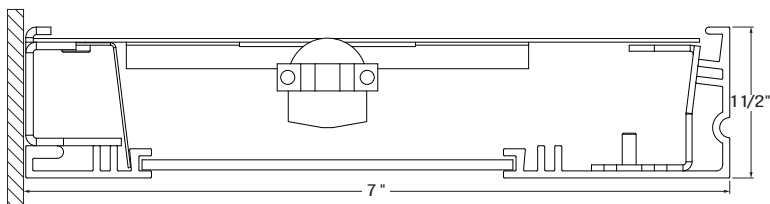

REVW - wall

### OPTICS




PMO - Precision Micro-prism Optic

### OPTICS

**PRECISION MICRO-PRISM-OPTIC (PMO)** - precisely formed pyramidal prisms with a 0.06" square base provide outstanding control of high-angle brightness. Upper diffuser yields 70/30 indirect/direct distribution. The widespread uplight provides a batwing distribution with peak intensity at 117° and a peak-to-zenith ratio of 2.7:1; shielding from the PMO optic provides 45° optical cut off. Upper reflectors create options for a higher downlight component. Reven is suitable for wide row spacing with a comfortable ceiling brightness gradient.


### LIGHT DISTRIBUTION



**30-70** - 30% down - 70%up

### LUMINAIRE LENGTH

Reven is made up of standard 4, 8 and 12 foot sections only that may be joined together to create continuous run lengths. Nominal run length required must be noted in the product code. The minimum individual section available is 4 feet. All individual sections are joined together onsite using the joiner kits provided. LumenWerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.



Joining system for Reven

### ELECTRICAL

Universal input voltages with multiple control schemes offered. Consult factory for availability.

### EMERGENCY

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation. Recharge time of 24 hours.

### MOUNTING OPTIONS

Fixtures may be horizontally mounted directly to the wall. For long runs, a minimum of 6" from adjacent walls is required.

### FINISH

**Interior** - 95%, reflective matte powder coated white paint

**Exterior** - matte white or aluminum powder coating.

Custom finishes are also available.


### CONTROLS

LumenWerx offers several options for integrating occupancy and daylight controls. Whether a sensors control its own fixture or is part of a group of fixtures, lights can be automatically controlled according to different energy saving strategies. With **individual Controls**, an on-board sensor controls the fixture in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire fixture, or just a section.

With **Grouped Controls**, on-board or remote sensor are part of a either a local or network sensor infrastructure. It's possible to scale the controls, from a switch to a fixture setup, to a room or a whole building Occupancy and or daylight harvesting.

#### INDIVIDUAL CONTROLS

Individual controls are integrated into the fixture and are therefore easy to use and allow for a cleaner looking space as no ceiling or wall-mounted sensors are required. Individual controls can be one of three types (**OMS**) Occupancy, (**ODS**) Daylight Harvesting (Photocell), or (**OCS**) combined occupancy and daylight harvesting. These controls will be installed with factory settings, but most offer field adjustability with regular tools or manufacturer supplied configuration tools.



Location of an Onboard control

#### GROUPED CONTROLS

**Local systems** permit added flexibility and interconnectivity. Each fixture can now become part of a group of fixtures and be controlled by On-Board or remote sensors as well as wireless switches or controllers. With this architecture, it is now possible to have fewer fixtures with On-Board sensor which control all of the fixtures of the lighting zone. In order to have grouped controls programmed in factory, it is required that a floor layout with requested grouping and functionality be supplied. Field commissioning is also possible but must be requested and discussed before final Purchase Order is placed.

**Network Controls**, Lumenwerx fixtures are compatible with most popular BMS integration protocols such as DALI, DMX, EnOcean, BACnet, Enlighted and Lutron Ecosystem just to name a few. Field commissioning is usually required and details must be discussed before final Purchase Order is placed.

**Please contact our controls department at [controls@lumenwerx.com](mailto:controls@lumenwerx.com) for further assistance.**

### CONSTRUCTION

**Housing** - Extruded Aluminum 0.075" nominal, matte white or aluminum powder coating. Custom finishes are also available.

**End cap** - Die cast Aluminum (0.95" nominal)

**Joiners** - male/female system made in Die cast Aluminum (0.95" nominal)

**Interior brackets** - Die formed cold rolled sheet steel 20 gauge thick

**Reflectors** - Flat rolled Aluminum sheet 0.040" thick precisely die formed, 95% reflective matte white painted

**Hanger** - Chromed Griplock securely attached with spring steel hardware in end caps and/or joiners

**Air craft cable suspension** - 7x7 braids Aluminum air craft cable 0.06" thick

**Stem** - 0.5" diameter threaded steel tube matte white or aluminum powder coating. Custom finishes are also available

### WEIGHT

**Reven 4 4ft** - 9.25bs - 4.2kg

**Reven 4 8ft** - 17.84lbs - 8.1kg

**Reven 4 12ft** - 26.43lbs - 12kg

### CERTIFICATIONS

**ETL** - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.