



**NOTE:** Wire dimming conductors as Class 1

1

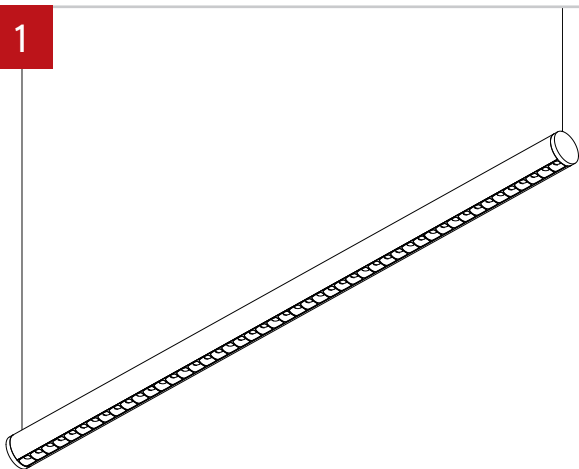


Make sure the power to the fixture is turned off.

2

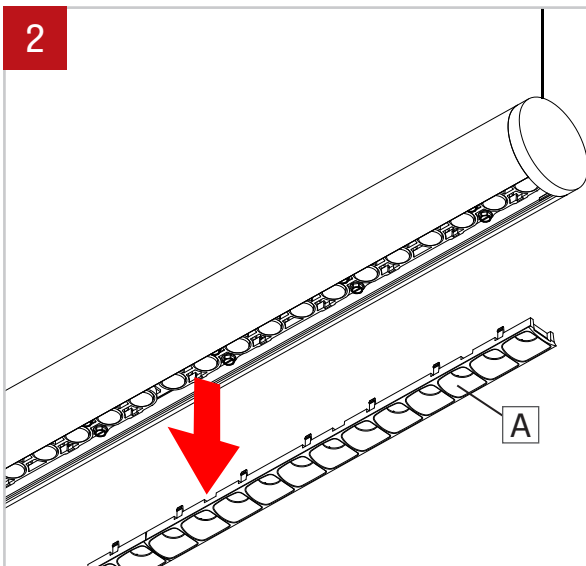


Remove the two louvers (A).

3

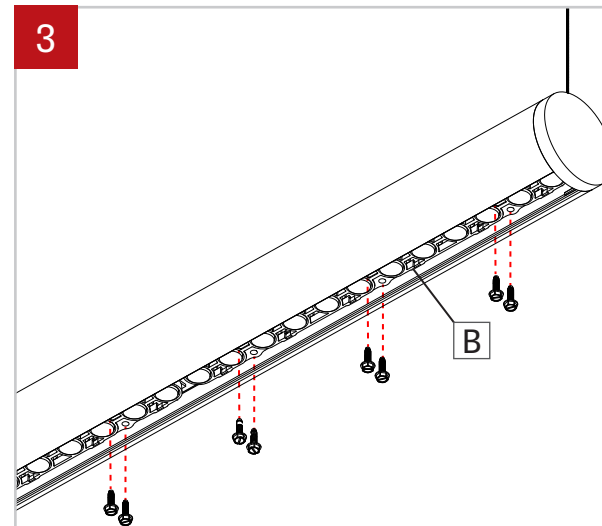


Unscrew the two lens holders (B).

4

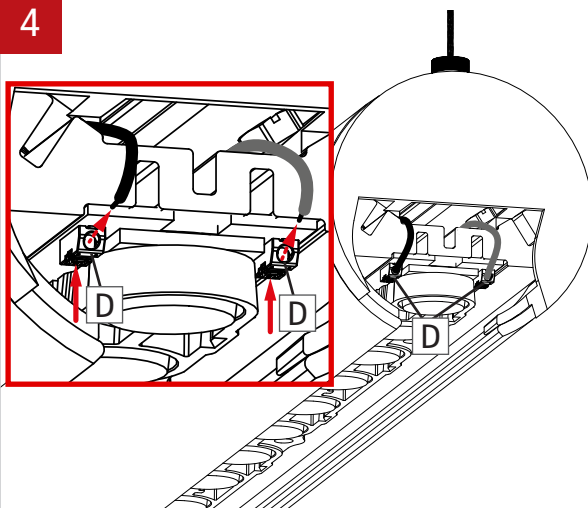


Disconnect the LED molex connector (D) by taking a pointed object and pressing on the two tabs on the top.

5

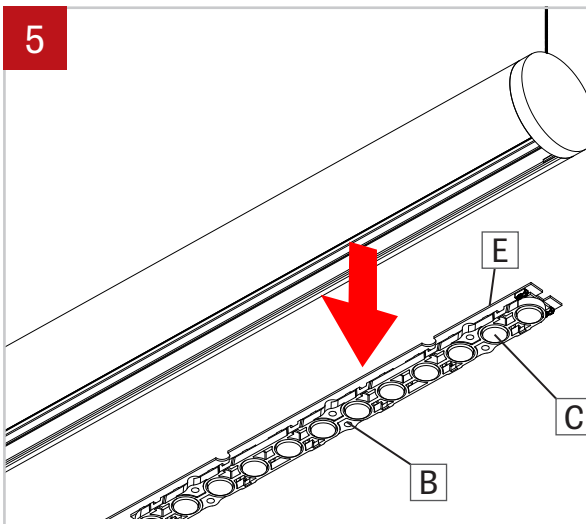


Gently lowers the lens holders (B) and LED board (E), making sure that all the individual lenses (C) are also being removed.


6

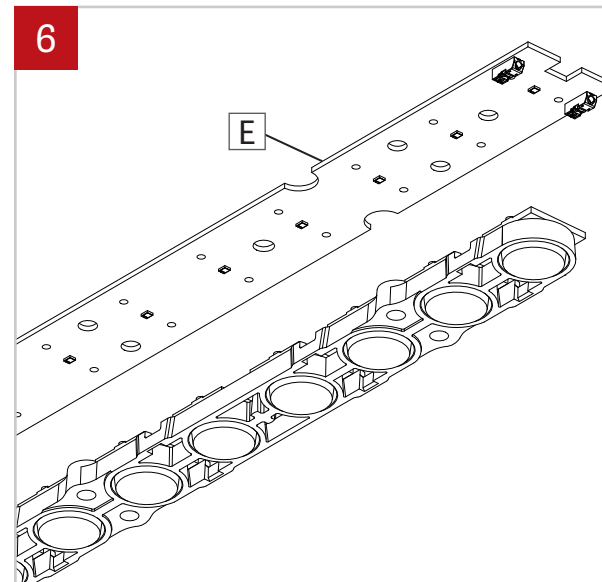


Remove the LED Board (E).

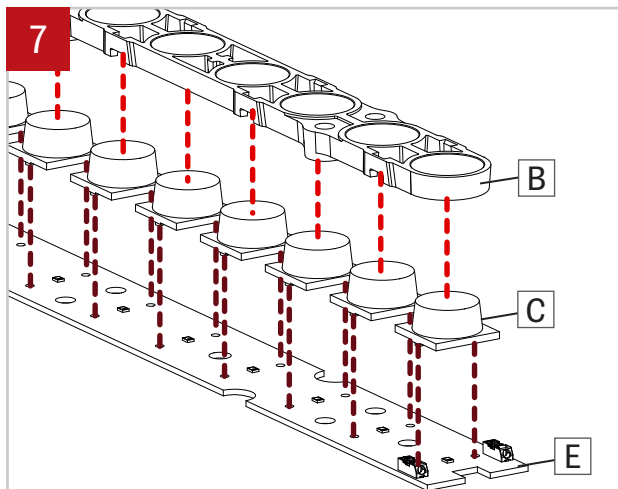

Replace the LED board (E) and put back the lenses (C) and the lens holders (B) on top of it. Make sure that the individual lenses (C) are properly secured on the lens holders (B).

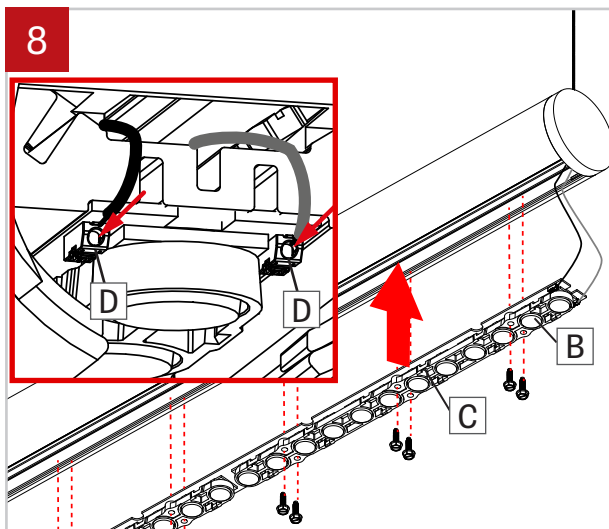

Reconnect the LED molex connector (D). Screw the lens holder (B) back in place, making sure not to hide any LED chips.

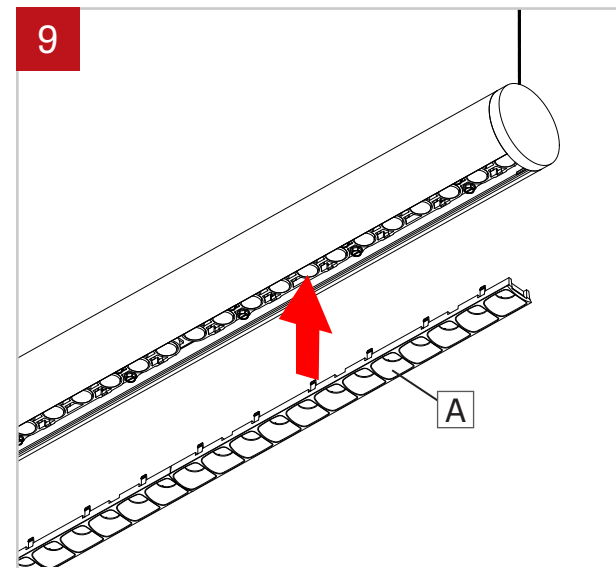

Put back in place the louvers (A).